| PER STAGE | IMP. DIA | IMP EXIT | IMPELLER PART NO. 2770<br>IMPELLER PATTERN NO. 2640 | THRUST CONSTANT 3.8<br>WR² .068 LB. FT²/STAGE | PUMP SHAFT DIAM. $1\frac{3}{16}$ |
|---|---|---|---|---|---|

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 8"

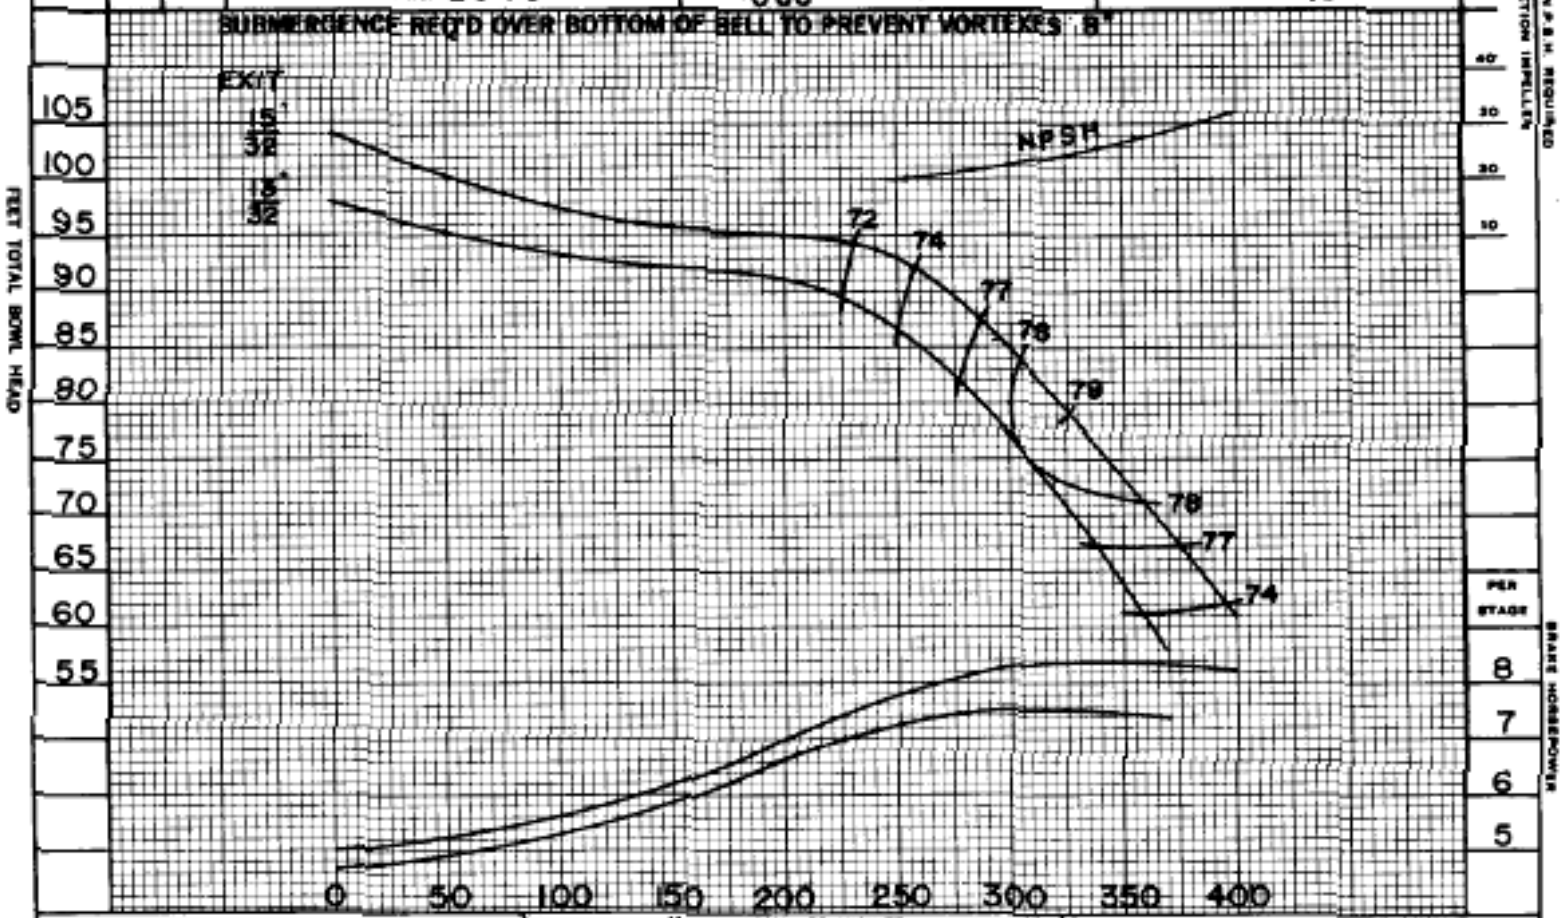


PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP. GR. 1.0
FOR 1 STAGE MULTIPLY HEAD & EFF. BY .95
FOR 2 STAGES MULTIPLY HD. & EFF. BY .98

DATE 4-23-73

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1909

7 CS TURBINE PUMP
IMPELLER — BRONZE

3500 R.P.M.
BOWL — CAST IRON
VIT. EN.
CURVE SHEET NO.
EC-0687

JP-1017