PER STAGE	IMP. DIA.	IMP. GRIT	IMPELLER PART NO. 5638	THRUST CONSTANT 5·4	PUMP SHAFT DIAM. $1\frac{3}{16}$
			IMPELLER PATTERN NO. 5627	WR² 0·282 LB. FT²/STAGE	

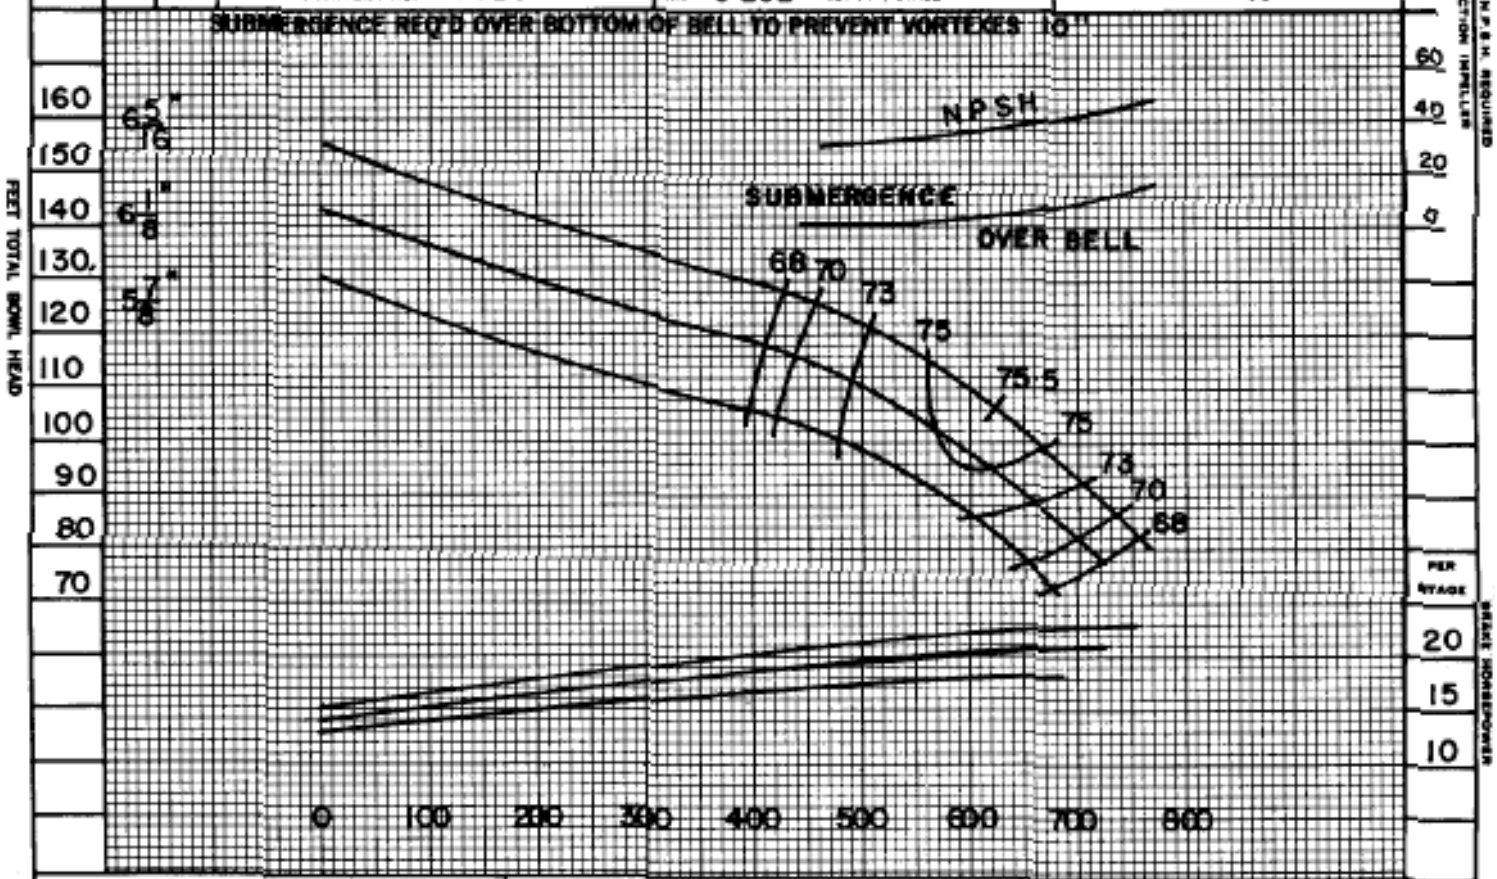

PERFORMANCE BASED ON MULTISTAGE TESTS PUMPING CLEAR COLD WATER SP. GR. 1.0

FOR 1 STAGE MULTIPLY HEAD & EFF. BY .95

FOR 3 STAGES MULTIPLY HD. & EFF. BY .98

DATE 11-18-86

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1908

8CC TURBINE PUMP
IMPELLER — BRONZE

3500 R.P.M.
BOWL — CAST IRON
VIT. EN.

CURVE SHEET NO. EC-0690

JP-1017