PER STAGE	IMP. DIAM. EXIT	IMPELLER PART NO. / IMPELLER PATTERN NO.	THRUST CONSTANT 600 / WR2 2100 LB. FT2/STAGE	PUMP SHAFT DIAM. 5.50 INCHES

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 120"

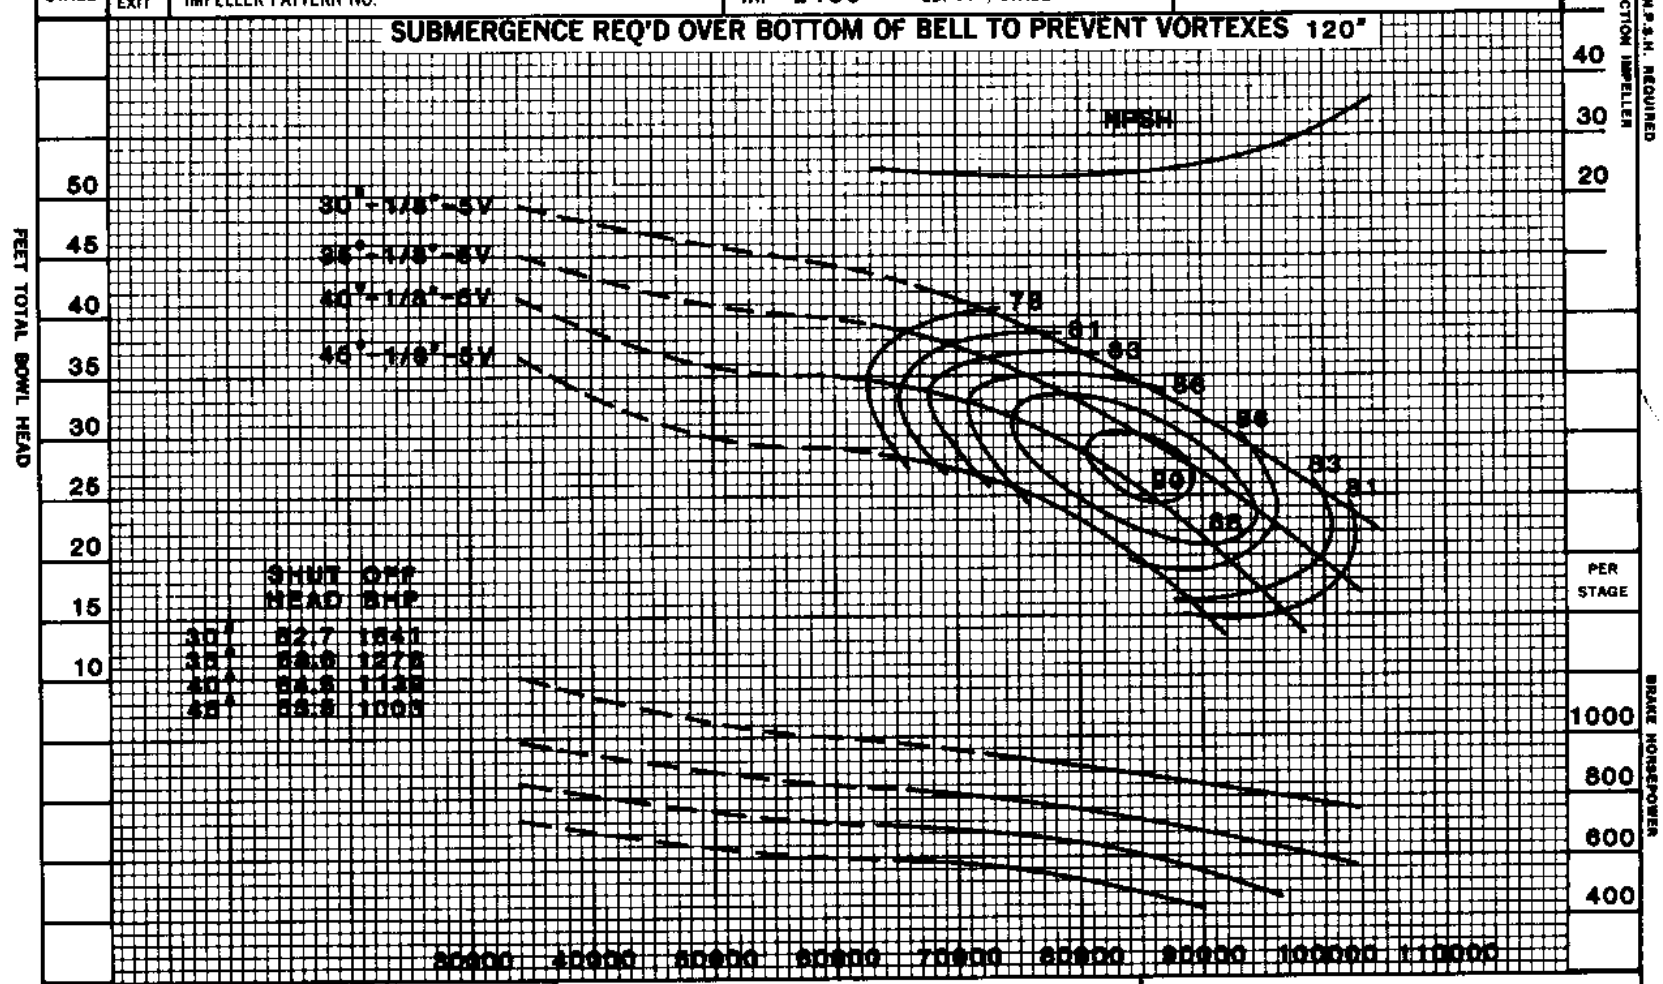

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP. GR. 1.0
FOR 1 STAGE MULTIPLY HEAD & EFF. BY
FOR ☐ STAGES MULTIPLY HD. & EFF. BY
DATE 1-1-18-86

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1909

50 YMS
IMPELLER – BRONZE
MIXED-FLOW PUMP
CLASS 'C' FINISH

395 RPM
BOWL – CAST IRON
CURVE SHEET NO.
EC-2776

JP 1124