PER STAGE	IMP. DIA.	IMP. EXIT	IMPELLER PART NO. 9937	THRUST CONSTANT 282	PUMP SHAFT DIAM. 4"
			IMPELLER PATTERN NO. 9298	WR^2 560 LB. FT^2/STAGE	

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 69 INCHES

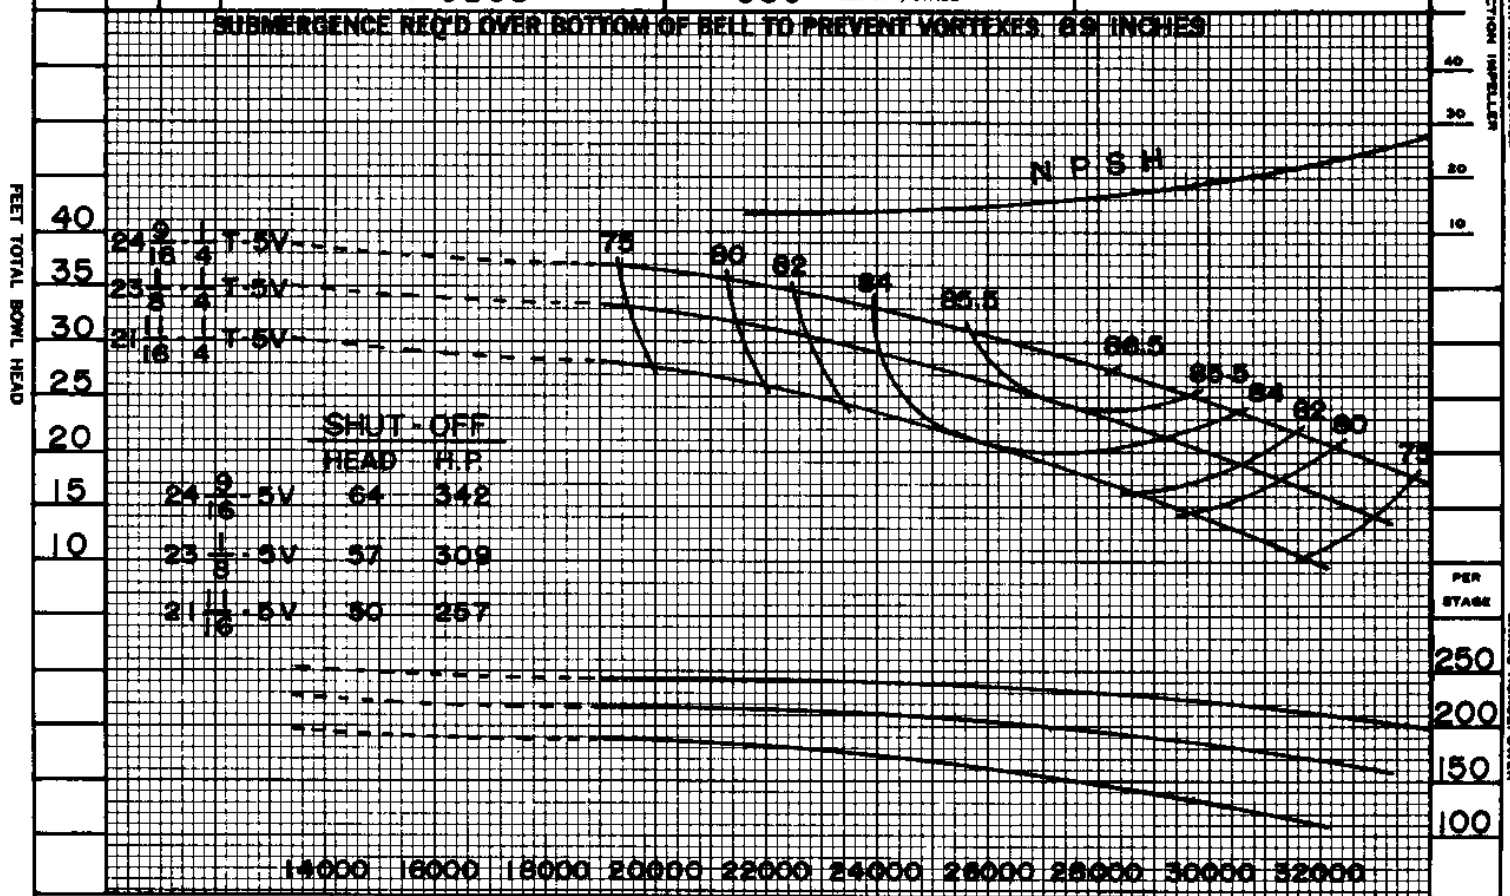

SHUT-OFF	HEAD	H.P.
24 9/16 - 5V	64	342
23 1/8 - 5V	57	309
21 11/16 - 5V	50	257

PERFORMANCE BASED ON MULTISTAGE TESTS PUMPING CLEAR COLD WATER SP. GR. 1.0

FOR 1 STAGE MULTIPLY HEAD & EFF. BY 1.0

FOR 2 STAGES MULTIPLY HD. & EFF. BY 1.0

DATE 1-9-74

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1908

36LS MIXED-FLOW PUMP — 440 R.P.M.

IMPELLER — BRONZE
BOWL — CAST IRON
CLASS 'C' FIN.

CURVE SHEET NO. EC-1025

JP-1017