PER STAGE	IMP. DIA	IMP. EXIT	IMPELLER PART NO. 3005	THRUST CONSTANT 194	PUMP SHAFT DIAM. $2\frac{7}{16}$
			IMPELLER PATTERN NO. 2999	WR² 41 LB. FT²/STAGE	

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 70"

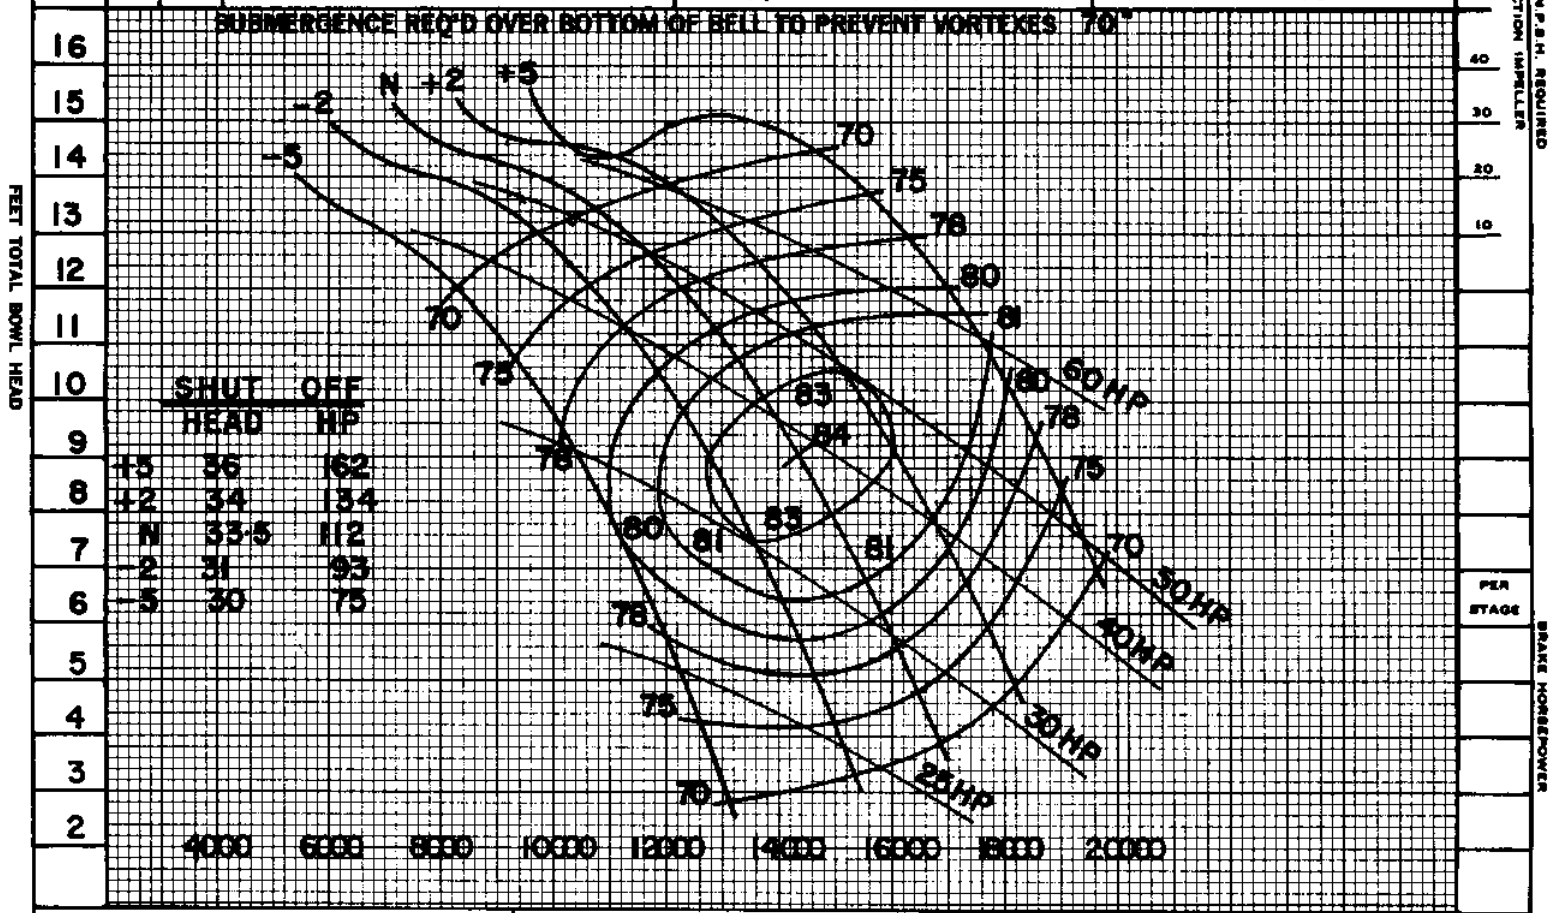

SHUT OFF	HEAD	HP
+5	36	162
+2	34	134
N	33.5	112
-2	31	93
-5	30	75

U.S. GALLONS PER MINUTE

PERFORMANCE BASED ON MULTISTAGE TESTS PUMPING CLEAR COLD WATER SP. GR. 1.0

FOR 1 STAGE MULTIPLY HEAD & EFF. BY 1.0

FOR 2 STAGES MULTIPLY HD & EFF BY 1.0

DATE 9-25-73

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1909

24 PO PROPELLER PUMP 585 RPM

IMPELLER — BRONZE BOWL — CAST IRON

CURVE SHEET NO EC-0862

JP-1017