PER STAGE	IMP. DIA	IMP. EXIT	IMPELLER PART NO. 6819	THRUST CONSTANT 194	PUMP SHAFT DIAM. 3 7/16
			IMPELLER PATTERN NO. 9297	WR² 222 LB. FT²/STAGE	

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 74 INCHES

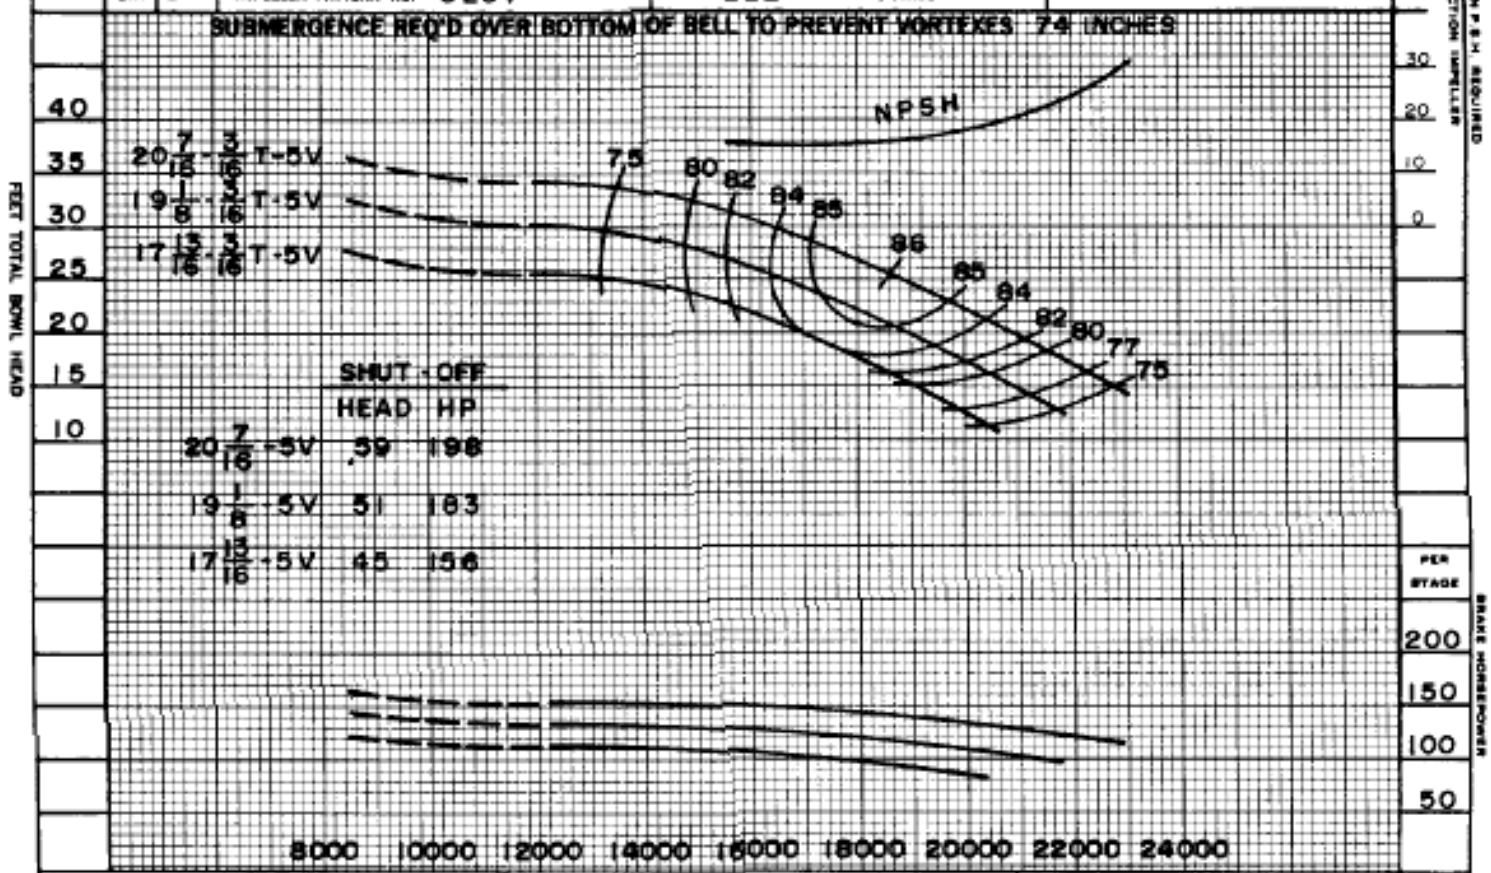

	SHUT-OFF HEAD	HP
20 7/16 -5V	59	198
19 1/8 -5V	51	183
17 13/16 -5V	45	156

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP. GR. 1.0
FOR 1 STAGE MULTIPLY HEAD & EFF BY 1.0
FOR 2 STAGES MULTIPLY HD & EFF BY 1.0
DATE 1-9-74

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1908

30 LS MIXED-FLOW PUMP
IMPELLER — BRONZE
CLASS 'C' FIN.

505 RPM
BOWL — CAST IRON

CURVE SHEET NO
EC-1019

JP-1017