PER STAGE	IMP. DIA.	IMP. EXIT	IMPELLER PART NO. 3608	THRUST CONSTANT 437	PUMP SHAFT DIAM. $3\frac{3}{16}$
			IMPELLER PATTERN NO. 3570	WR² 280 LB. FT²/STAGE	

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 105 INCHES

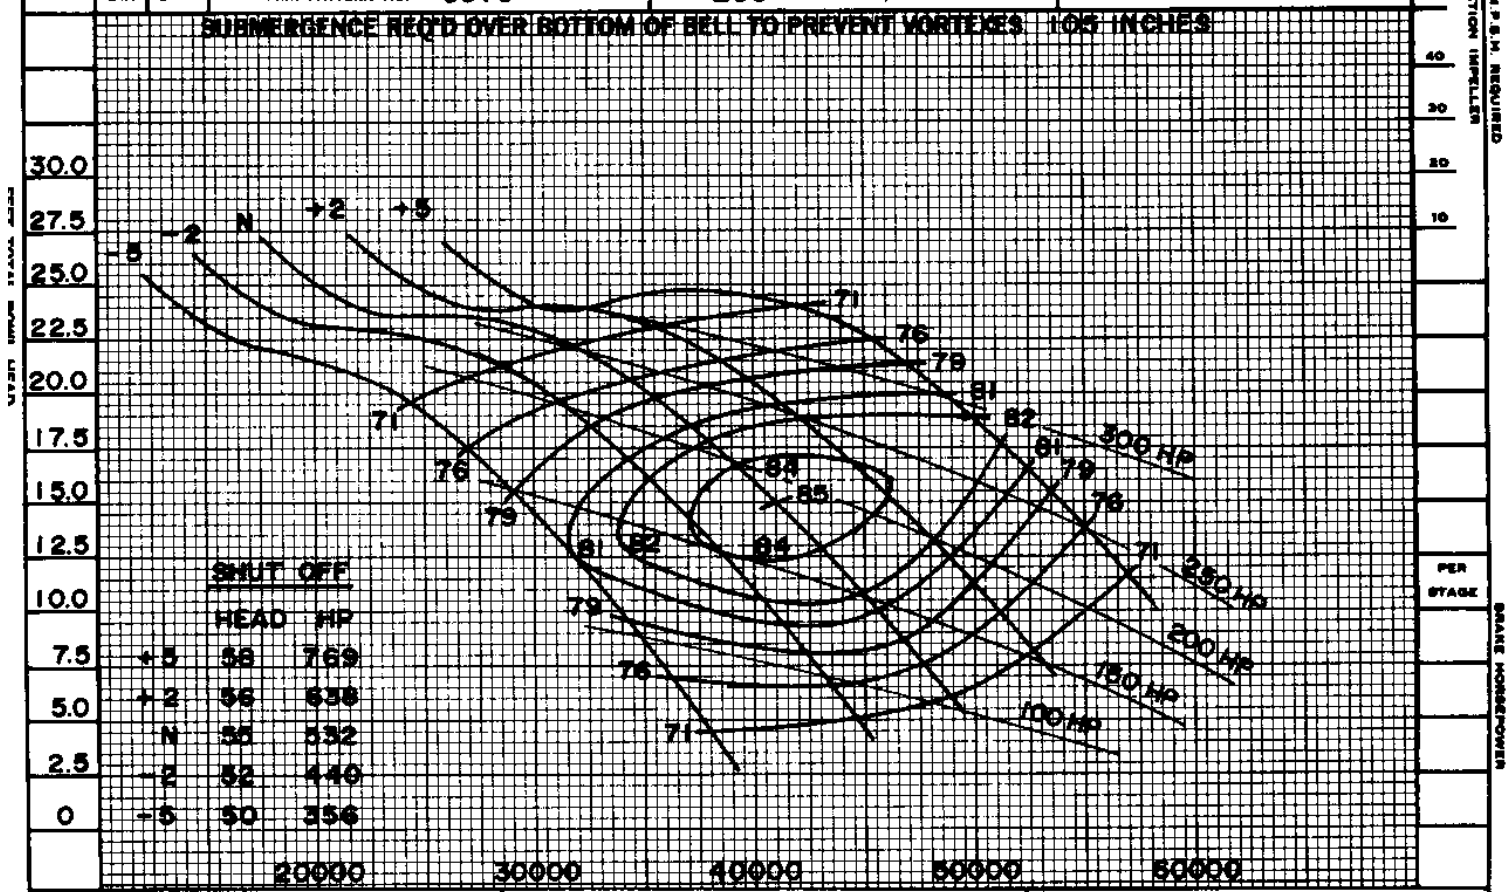

SHUT OFF	HEAD	HP
+5	58	769
+2	56	638
N	55	532
-2	52	440
-5	50	356

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP. GR. 1.0
FOR 1 STAGE MULTIPLY HEAD & EFF. BY 1.0
FOR 2 STAGES MULTIPLY HD. & EFF. BY 1.0
DATE 5-24-73

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1908

36 PO PROPELLER PUMP 500 R.P.M.
IMPELLER — BRONZE BOWL — CAST IRON

CURVE SHEET NO. EC-0791

JP-1017