PER STAGE	IMP DIA	IMP EXIT	IMPELLER PART NO. 32512 / IMPELLER PATTERN NO. 19694	THRUST CONSTANT 282 / WR² 560 LB. FT²/STAGE	PUMP SHAFT DIAM 4"

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 89 INCHES

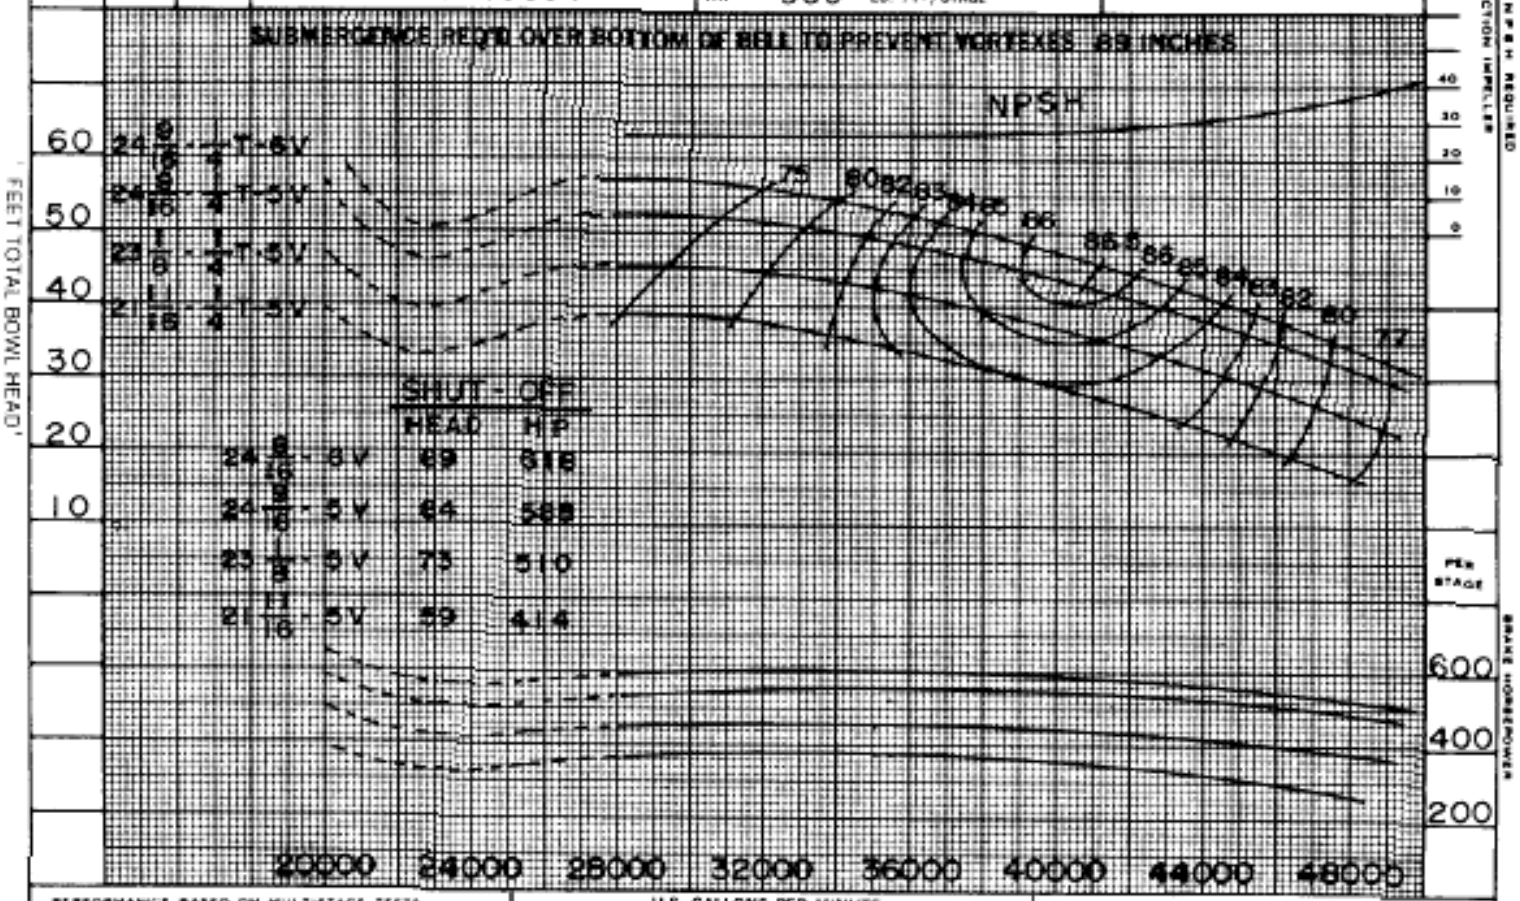

	SHUT-OFF HEAD	HP
24 9/16 - 5V	89	518
24 9/16 - 5V	84	588
23 1/8 - 5V	73	510
21 11/16 - 5V	59	414

PERFORMANCE BASED ON MULTI-STAGE TESTS PUMPING CLEAR COLD WATER SP. GR. 1.0

FOR 1 STAGE MULTIPLY HEAD & EFF. BY 1.0

FOR 2 STAGES MULTIPLY HD. & EFF. BY 1.0

DATE 11-18-86

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1936

36 PS MIXED-FLOW PUMP 505 R.P.M.

IMPELLER — BRONZE BOWL — CAST IRON

CLASS 'C' FIN.

CURVE SHEET NO. EC-1024