PER STAGE	IMP. DIA.	IMP. EXIT	IMPELLER PART NO. 14693	THRUST CONSTANT 87	PUMP SHAFT DIAM. 2 11/16"
			IMPELLER PATTERN NO. 14692	WR² 29 LB. FT²/STAGE	

MINIMUM DISTANCE REQUIRED OVER BOTTOM OF BELL TO PREVENT VORTEXES 20 INCHES

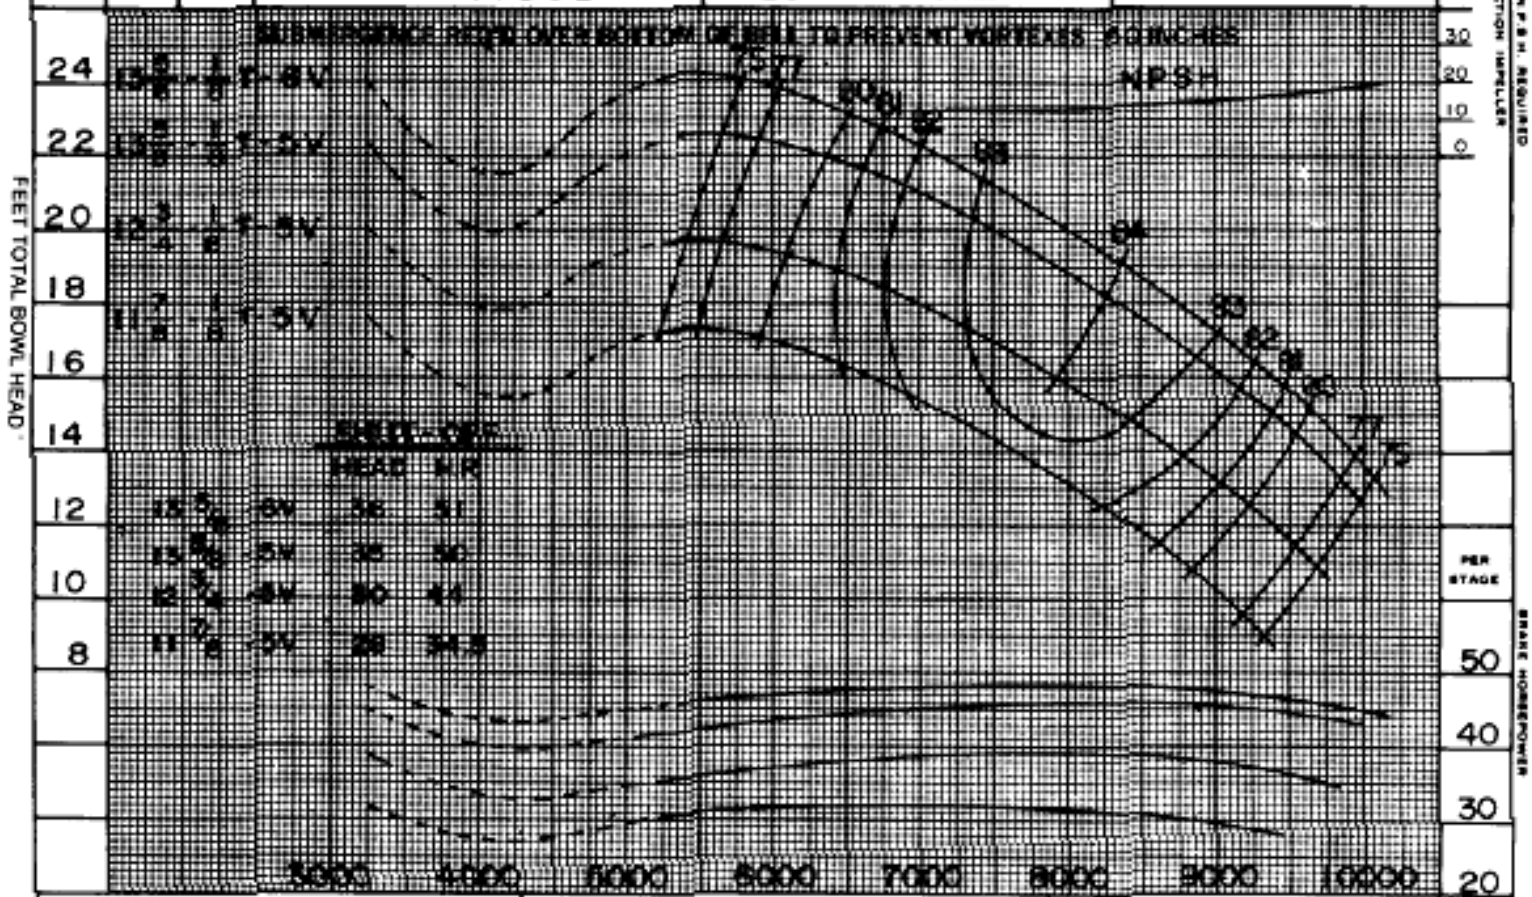

PERFORMANCE BASED ON MULTISTAGE TESTS PUMPING CLEAR COLD WATER SP. GR. 1.0

FOR 1 STAGE MULTIPLY HEAD & EFF BY 1.0

FOR 2 STAGES MULTIPLY HD & EFF BY 1.0

DATE 11-18-86

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1909

20PS MIXED-FLOW PUMP

IMPELLER — BRONZE

CLASS 'C' FIN.

590 RPM

BOWL — CAST IRON

CURVE SHEET NO. EC-1012