PER STAGE	IMP. DIAM. EXIT	IMPELLER PART NO. / IMPELLER PATTERN NO.	THRUST CONSTANT 212 / WR² 840 LB. FT²/STAGE	PUMP SHAFT DIAM. 4" INCHES

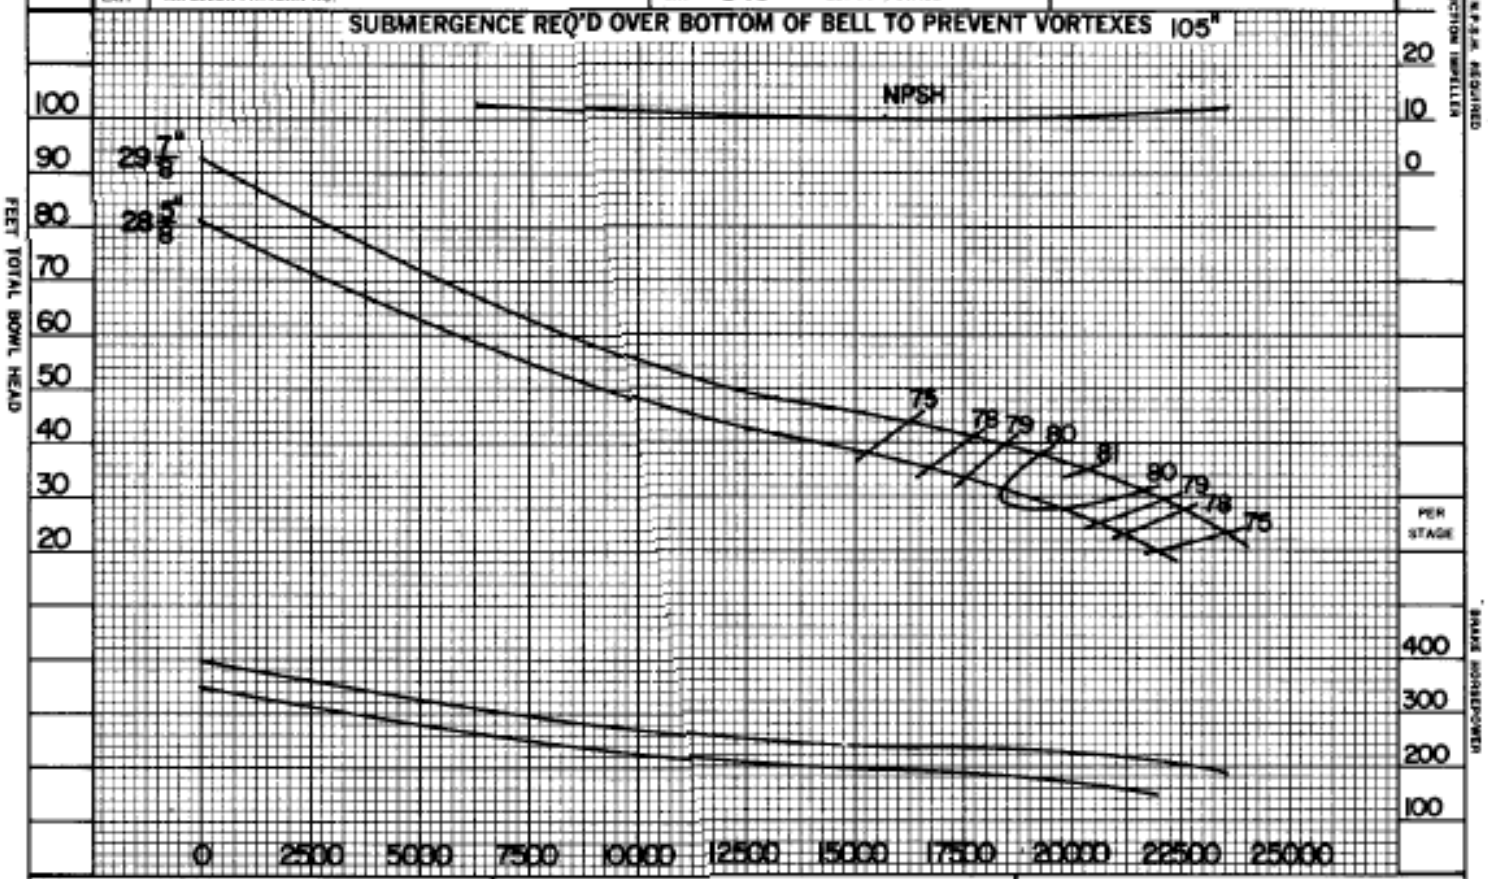

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP. GR. 1.0
FOR 1 STAGE MULTIPLY HEAD & EFF. BY 1.00
FOR 2 STAGES MULTIPLY HD. & EFF. BY 1.00
DATE 8-11-77

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1909

40 QLC TURBINE PUMP 590 RPM
IMPELLER – BRONZE
BOWL – CAST IRON COATED
CURVE SHEET NO. EC-2349

JP 1124

PER STAGE	IMP. DIAM. EXIT	IMPELLER PART NO. / IMPELLER PATTERN NO.	THRUST CONSTANT 212 / WR² 840 LB. FT²/STAGE	PUMP SHAFT DIAM. 4" INCHES

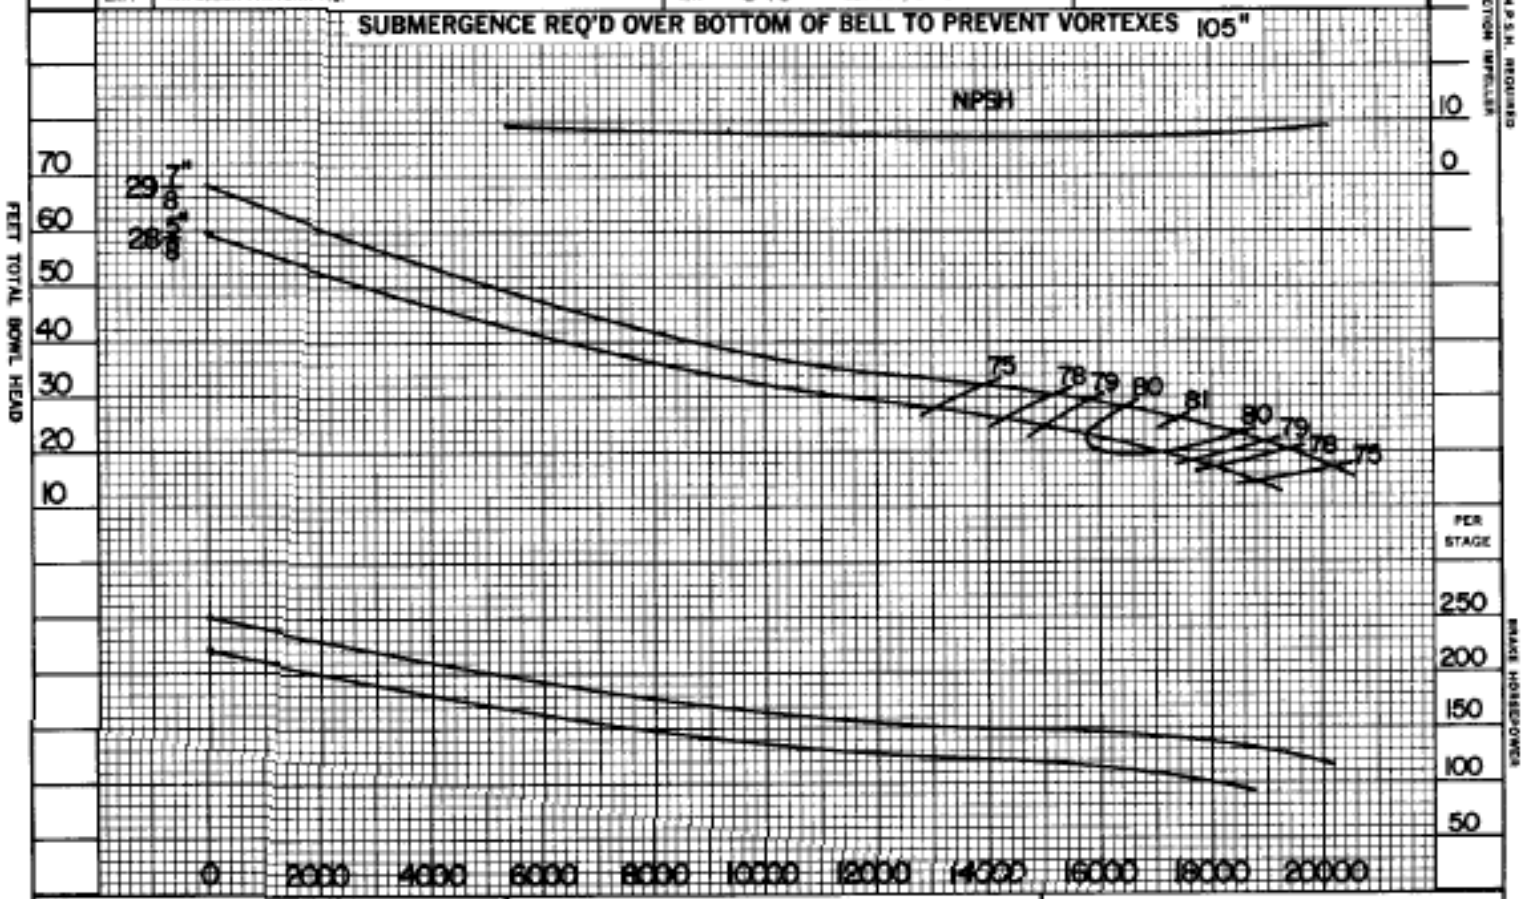

PERFORMANCE BASED ON MULTISTAGE TESTS PUMPING CLEAR COLD WATER SP. GR. 1.0

FOR 1 STAGE MULTIPLY HEAD & EFF. BY 1.00

FOR 2 STAGES MULTIPLY HD. & EFF. BY 1.00

DATE 8-11-77

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1909

40 QLC TURBINE PUMP 505 RPM

IMPELLER – BRONZE

BOWL – CAST IRON COATED

CURVE SHEET NO. EC-2348

JP 1124