PER STAGE	IMP. DIAM. EXIT	IMPELLER PART NO. IMPELLER PATTERN NO.	THRUST CONSTANT 125 WR² 43.6 LB. FT²/STAGE	PUMP SHAFT DIAM. INCHES 2-11/16

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 55"

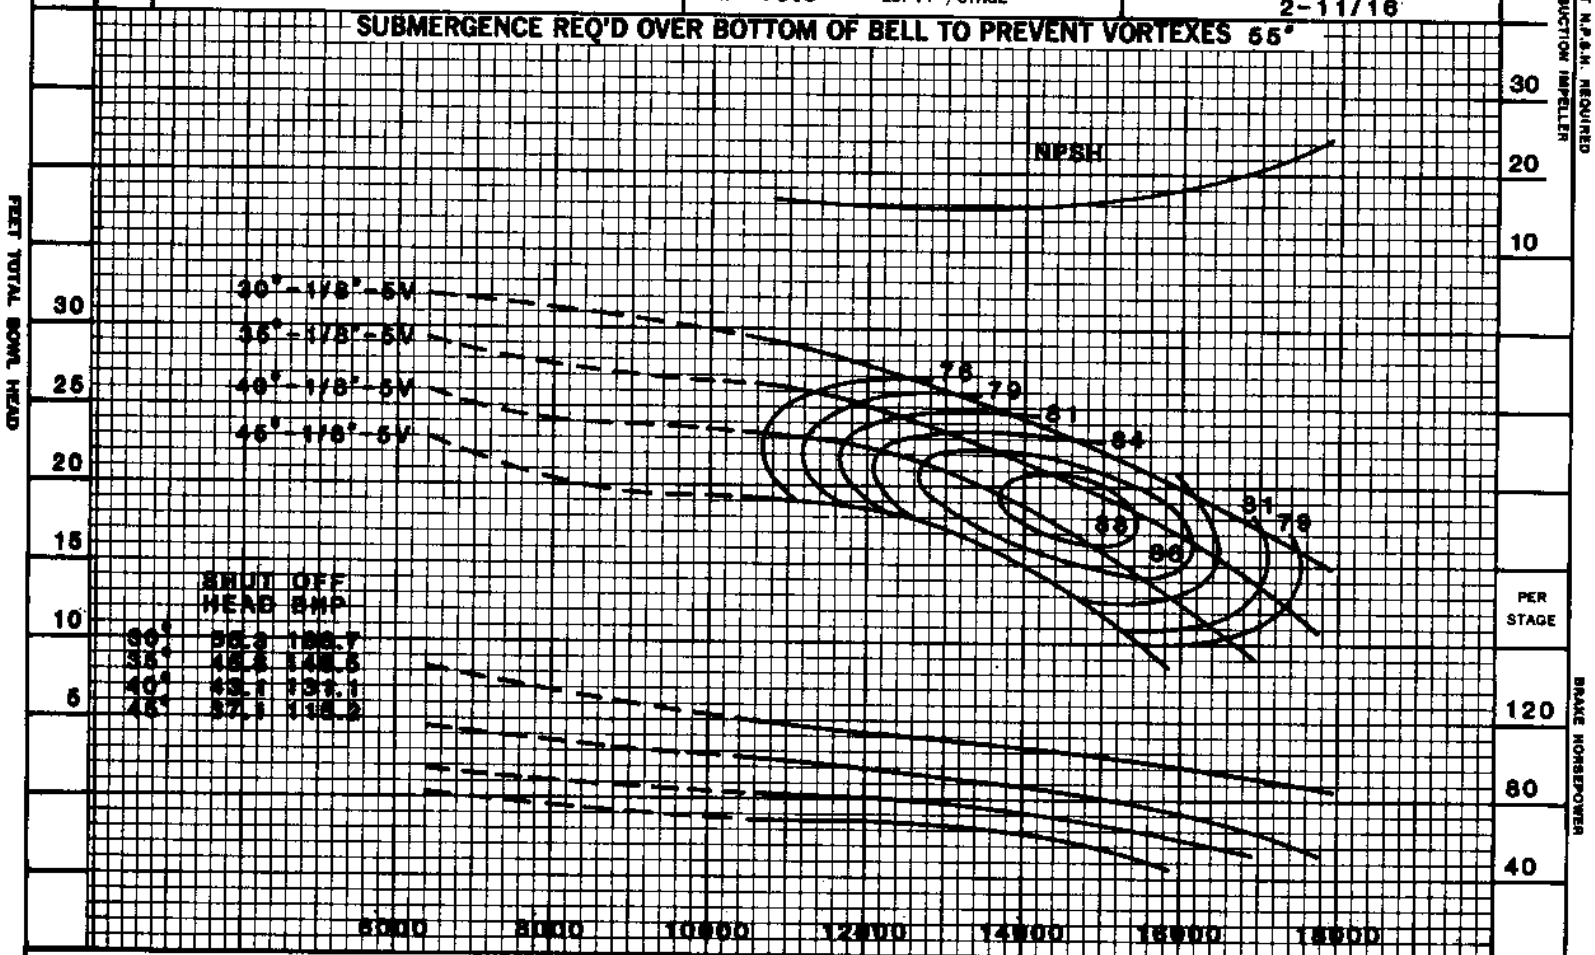

U.S. GALLONS PER MINUTE

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP. GR. 1.0
FOR 1 STAGE MULTIPLY HEAD & EFF. BY 1.00
FOR 2 STAGES MULTIPLY HD. & EFF. BY 1.00
DATE 11-18-86

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1909

24 YMS
IMPELLER – BRONZE
MIXED-FLOW PUMP
CLASS 'C' FINISH

705 RPM
BOWL – CAST IRON
CURVE SHEET NO.
EC-2813

JP341A