PER STAGE	IMP. DIA.	IMP. EXIT	IMPELLER PART NO. 23447	THRUST CONSTANT 111	PUMP SHAFT DIAM. $3\frac{7}{16}$
			IMPELLER PATTERN NO. 22424	WR² 228 LB. FT²/STAGE	

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 60"

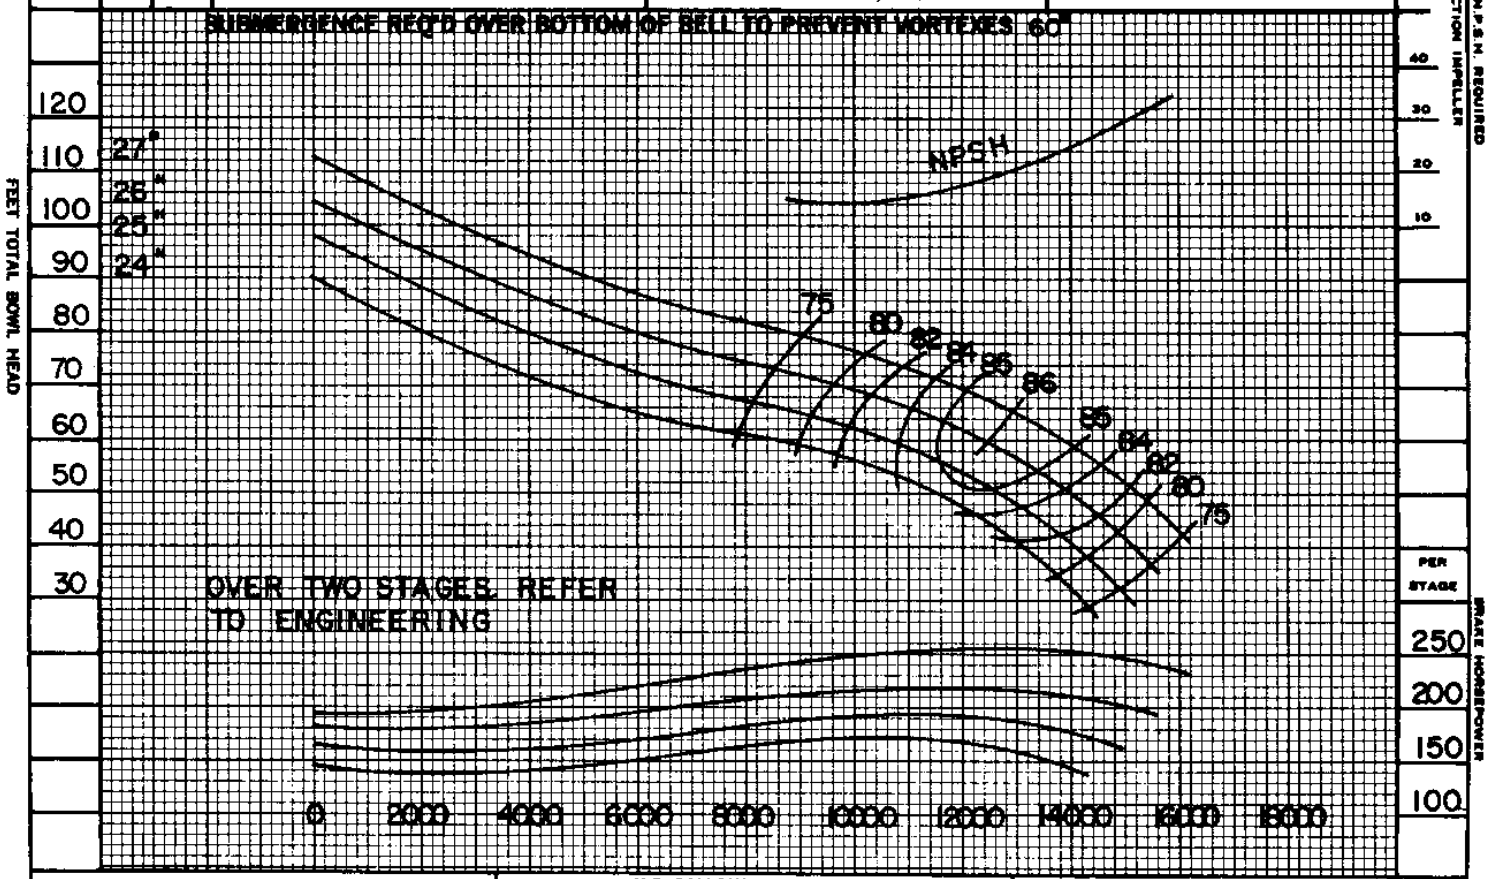

PERFORMANCE BASED ON MULTISTAGE TESTS PUMPING CLEAR COLD WATER SP. GR. 1.0

FOR 1 STAGE MULTIPLY HEAD & EFF. BY 1.00

FOR 2 STAGES MULTIPLY HD. & EFF. BY 1.00

DATE 6-12-74

U.S. GALLONS PER MINUTE

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1908

33CLC TURBINE PUMP
IMPELLER — BRONZE

700 R.P.M.
BOWL — CAST IRON COATED

CURVE SHEET NO. EC-1117

JP-1017