| PER STAGE | IMP. DIA. | IMP. EXIT | IMPELLER PART NO. 3832<br>IMPELLER PATTERN NO. 3566 | THRUST CONSTANT 28<br>WR² 9 LB. FT²/STAGE | PUMP SHAFT DIAM. $2\frac{3}{16}$ |
|---|---|---|---|---|---|

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 29"

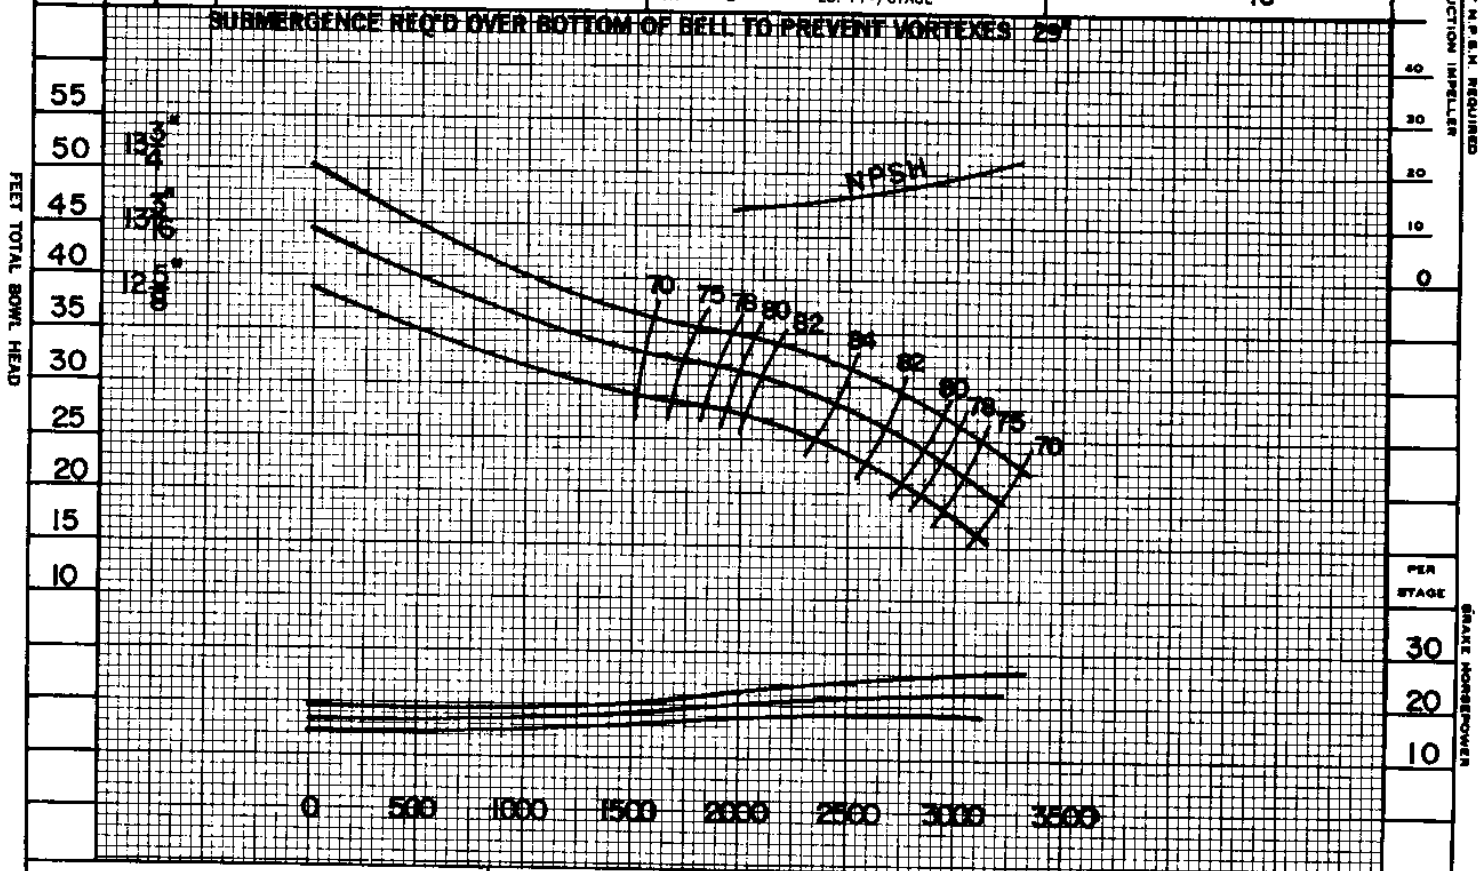


PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP GR 1.0

FOR 1 STAGE MULTIPLY HEAD & EFF. BY .97

FOR 2 STAGES MULTIPLY HD & EFF BY .99

DATE 11-18-86

**Johnston Pump Company**
Glendora, California 91740
ESTABLISHED 1909

18 EC TURBINE PUMP
IMPELLER — BRONZE

880 RPM
BOWL — CAST IRON

VIT·EN.
CURVE SHEET NO.
EC-0620

JP-1017