PER STAGE	IMP. DIA.	IMP. EXIT	IMPELLER PART NO. 5016	THRUST CONSTANT 54	PUMP SHAFT DIAM. $2\frac{7}{16}$
			IMPELLER PATTERN NO. 5015	WR^2 44·6 LB. FT^2/STAGE	

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 41"

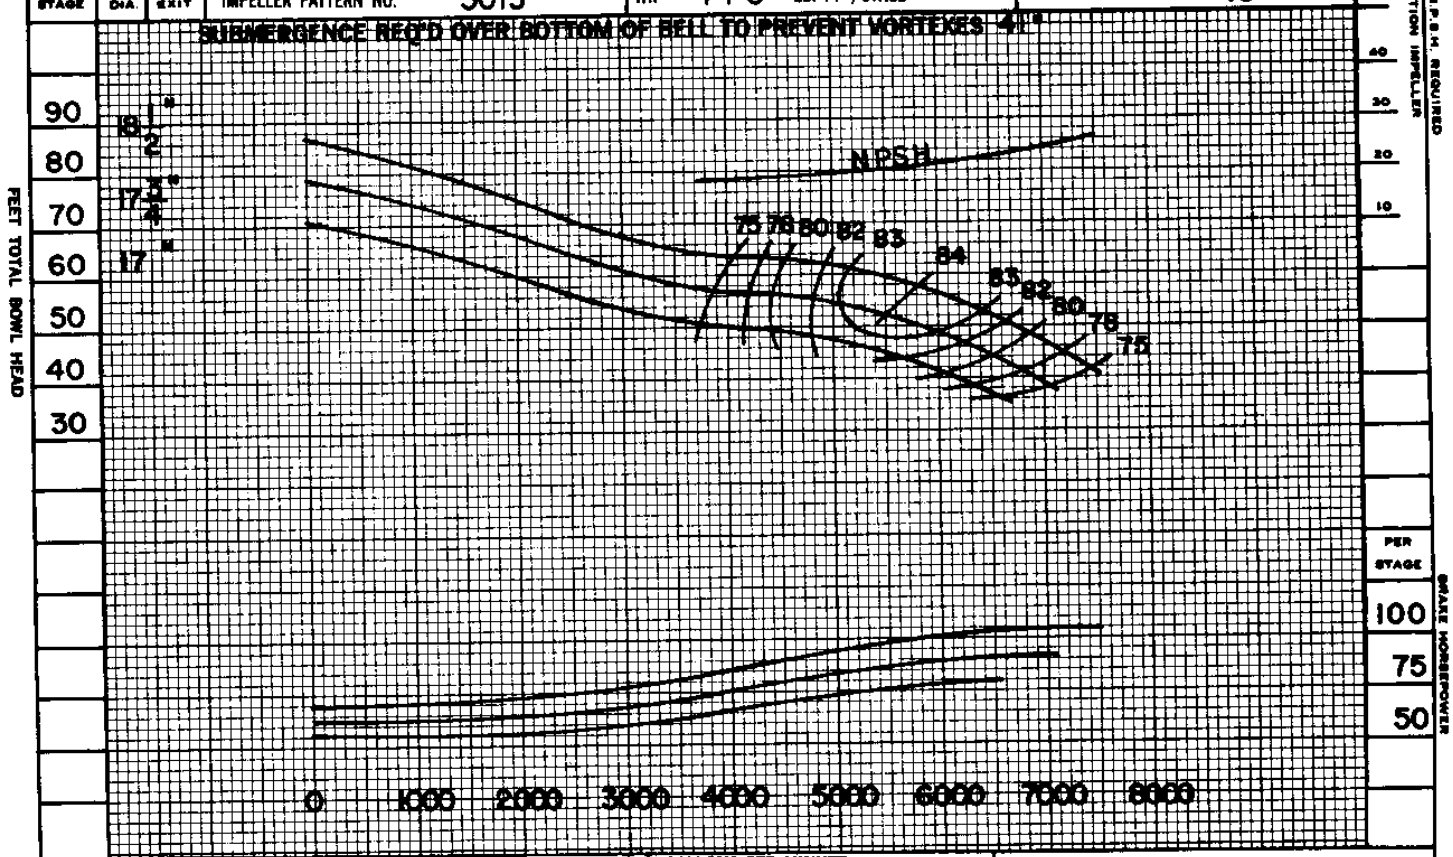

PERFORMANCE BASED ON MULTISTAGE TESTS PUMPING CLEAR COLD WATER SP GR 1.0

FOR 1 STAGE MULTIPLY HEAD & EFF. BY 0·99

FOR 2 STAGES MULTIPLY HD. & EFF. BY 1·00

DATE 11-18-86

Johnston Pump Company.
Glendora, California 91740
ESTABLISHED 1909

24EC TURBINE PUMP
IMPELLER — BRONZE

880 R.P.M.
BOWL — CAST IRON COATED

CURVE SHEET NO. EC-0447

JP-1017