CURVE NO. 12-165 10-15-78	No. Stages	Eff. Change	MATERIAL	Eff. Change
	1	--2	IMP.—C.I.	–1
	2	0	IMP.—NI-RI	–1
	3		BOWL—BRZ.	–1
	4		BOWL—NI-R.	–1

19 GH **1180** R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 2 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 2 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL

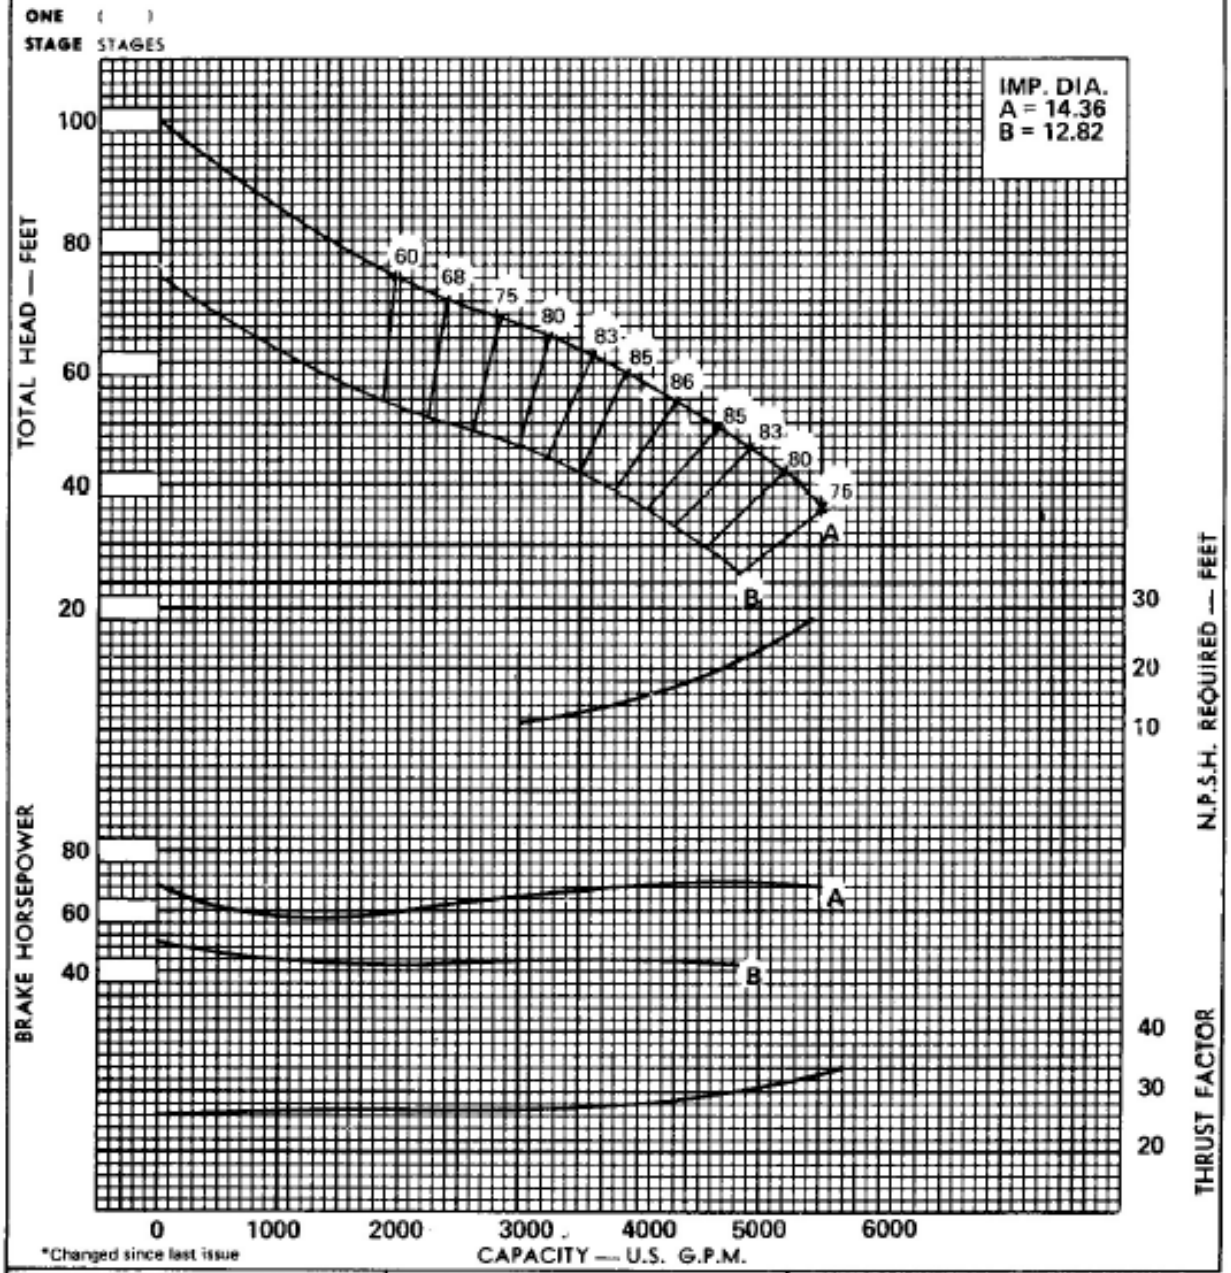

*Changed since last issue
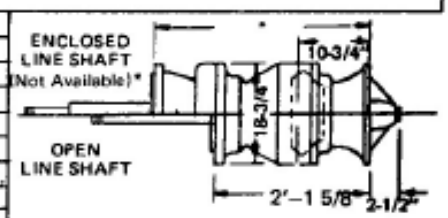
EYE AREA — SQ. IN.	= 69.5		IMPELLER WT.-LBS.	= 58	
WR^2 PER IMPELLER	= * 7.45	LB.-FT.^{2}	ONE STAGE WT.-LBS.	= 610	
MAX. SPHERE SIZE	= 1.25	in.	ADD'L STAGE WT.-LBS.	= 350	
MAX. NO. STD. STAGES	= 6		IMPELLER NUMBER	= 95G17	
MAX. OPERATING P.S.I.	= 300		DISCH. SIZES	= 14,16	
STD. LATERAL	= 0.62	in.	SUCTION SIZES	= Bell 17½ or 22½" *	
STD. SHAFT DIA.	= 2.187	in.	MAX. LATERAL	= ———	in.
MAX. SHAFT DIA.	= ———	in.	BOWL CONN.	FLANGED-COLLET	
MIN. SUBMERGENCE	= 32	in.	ADD	" PER ADDITIONAL STAGE.