CURVE NO. 12-155 10-15-78	No. Stages	Eff. Change	MATERIAL	Eff. Change
	1	0	IMP.—C.I.	−1
	2		IMP.—NI-RI	−1
	3		BOWL—BRZ.	−1
	4		BOWL—NI-R.	−1

19 GM **1180** R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 1 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 1 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

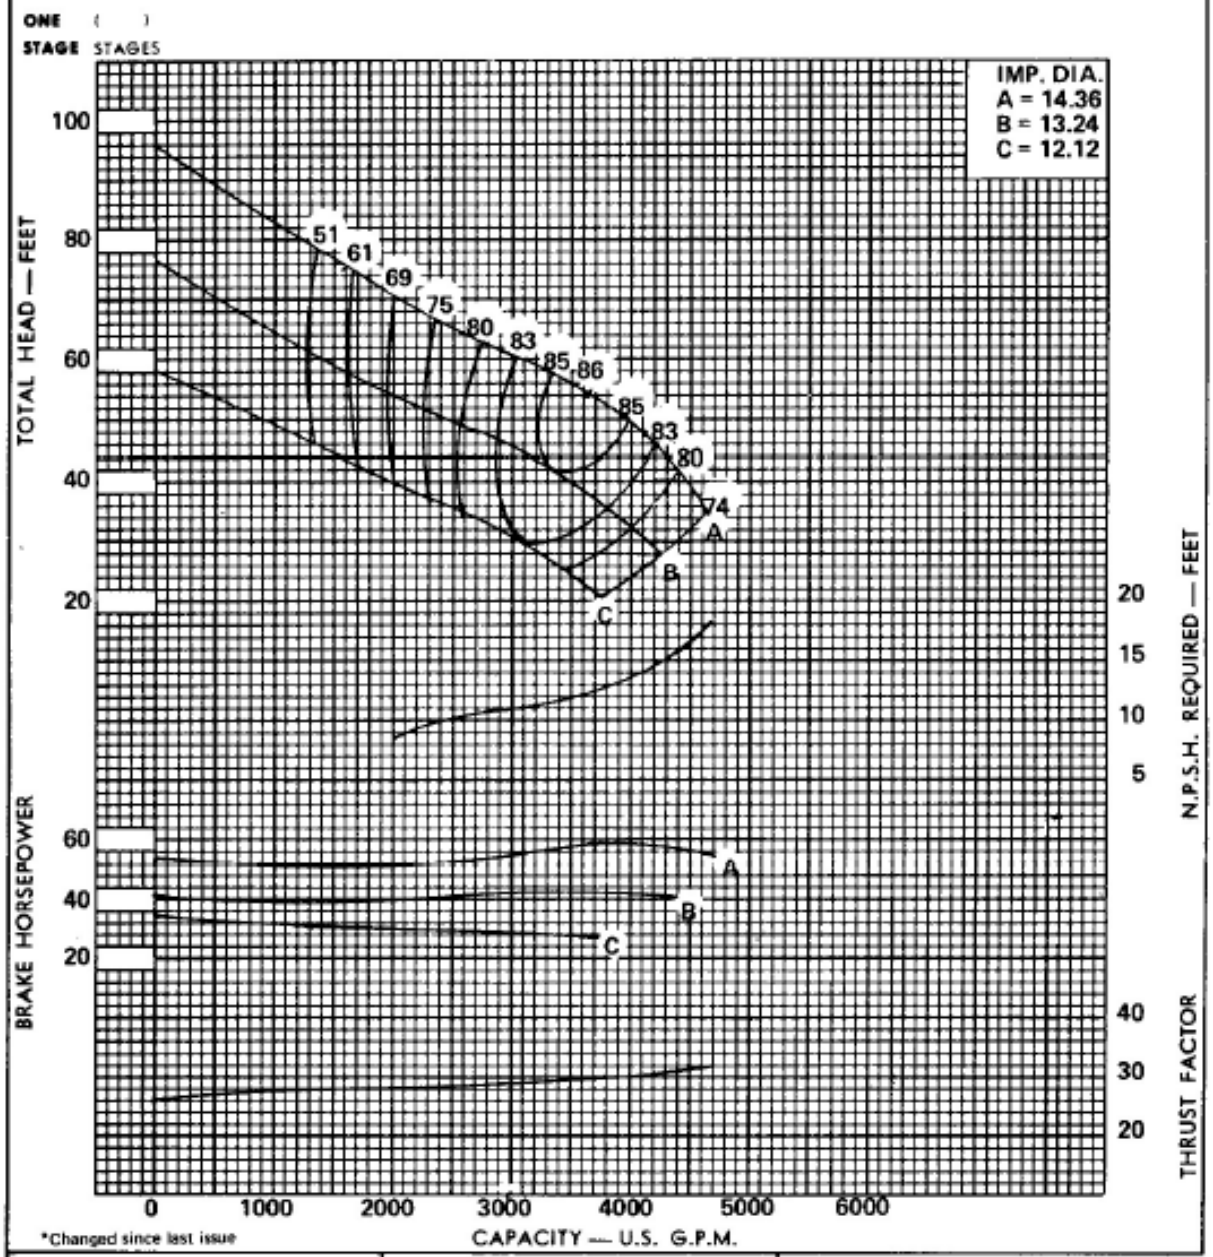

*Changed since last issue
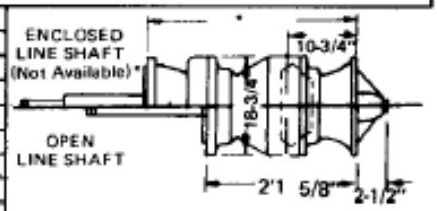
EYE AREA — SQ. IN.	=	69.5		IMPELLER WT.-LBS.	58
WR^2 PER IMPELLER	=	* 7.45	LB.-FT.^{2}	ONE STAGE WT.-LBS.	610
MAX. SPHERE SIZE	=	1.25	in.	ADD'L STAGE WT.-LBS.	350
MAX. NO. STD. STAGES	=	7		IMPELLER NUMBER	95G15
MAX. OPERATING P.S.I.	=	300		DISCH. SIZES	14,16
STD. LATERAL	=	0.62	in.	SUCTION SIZES	Bell 17½" or 22½"*
STD. SHAFT DIA.	=	2.188	in.	MAX. LATERAL	——— in.
MAX. SHAFT DIA.	=	———	in.	BOWL CONN.	FLANGED COLLET
MIN. SUBMERGENCE	=	32	in.	ADD "17 5/8" " PER ADDITIONAL STAGE.