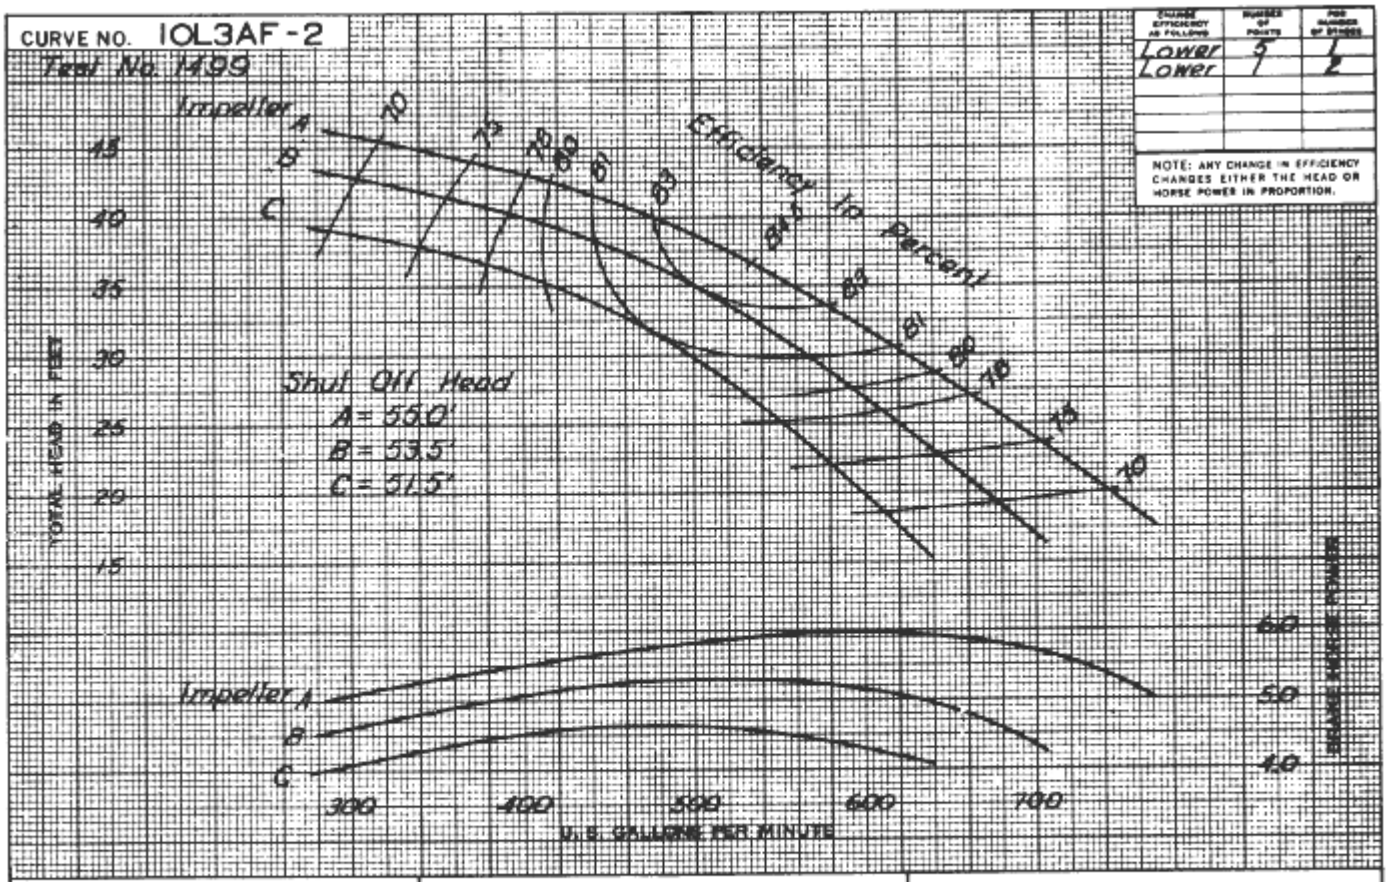

CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF POINTS	PER NUMBER OF STAGES
Lower	5	1
Lower	7	2

NOTE: ANY CHANGE IN EFFICIENCY CHANGES EITHER THE HEAD OR HORSE POWER IN PROPORTION.

HYDRAULIC PERFORMANCE is contingent on the well furnishing the pump with the specified amount of clear, fresh, non-aerated water at a temperature of not to exceed 85 degrees Fahrenheit.

POMONA PUMPS

Fairbanks, Morse & Co.

Chicago 5, Illinois — Pomona California

LABORATORY PERFORMANCE PE

PER STAGE 10L.C DEEP WELL TURBINE

PUMP OPERATED AT 1760 R. P. M.

FIELD LOSS MUST BE DEDUCTED