WDM PUMPS

VERTICAL TURBINE PUMP

MODEL 6 C-18

VC-20
Dated 07/01/94

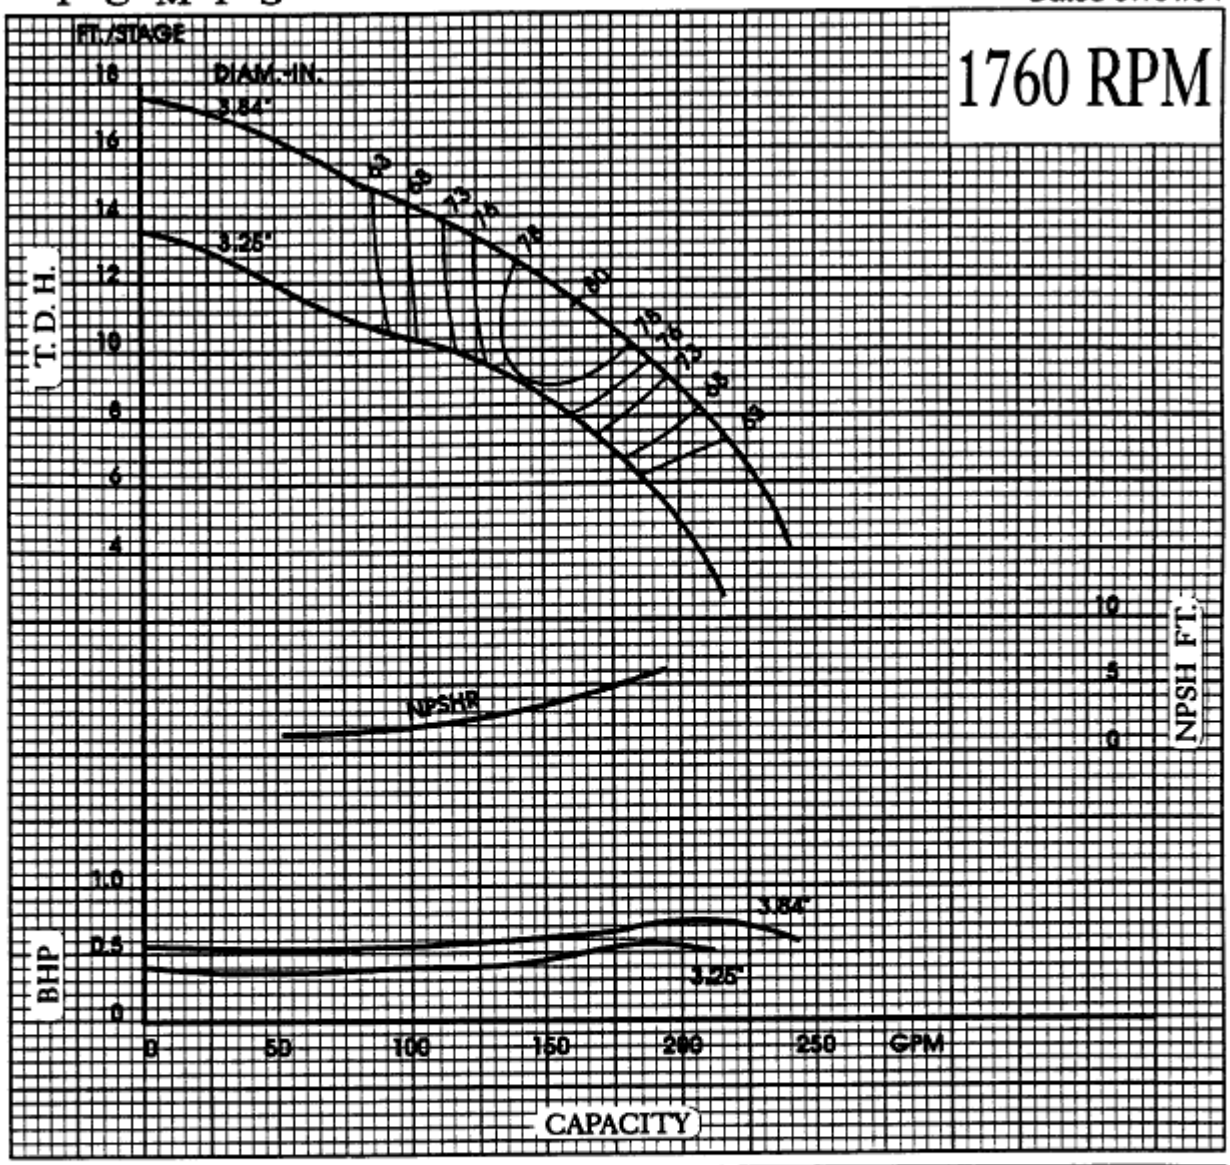

Efficiency shown is for 6 stages or more, with standard materials. For fewer stages change efficiency as shown.			
No. of stages.	Eff. change	No. of stages.	Eff. change
1	- 6.0	4	- 2.0
2	- 4.0	5	- 1.5
3	- 2.5	6	——

TECHNICAL DATA	LBS.
Bowl wt. add'l stage (lbs.)	17
Rotor wt. per stage (lbs.)	5
Bowl wt. first stage (lbs.)	53
Thrust factor	3.4
Max bowl horsepower	40
Impeller eye area (sq. inch.)	6.3

CUSTOMER:	FLUID:	SP. GR.:	EFF.:
SERVICE:	CAPACITY:	VISC.:	BHP:
DATE:	T. D. H.:	NPSHA:	NPSHR: