horizontally split centrifugal pumps

LR-LLR

EYE AREA = 15.2 SQ. IN., MAX. DIA. SOLIDS = 5/16", MAX. SHAFT BHP AT 1760 RPM = 36, 1160 = 21

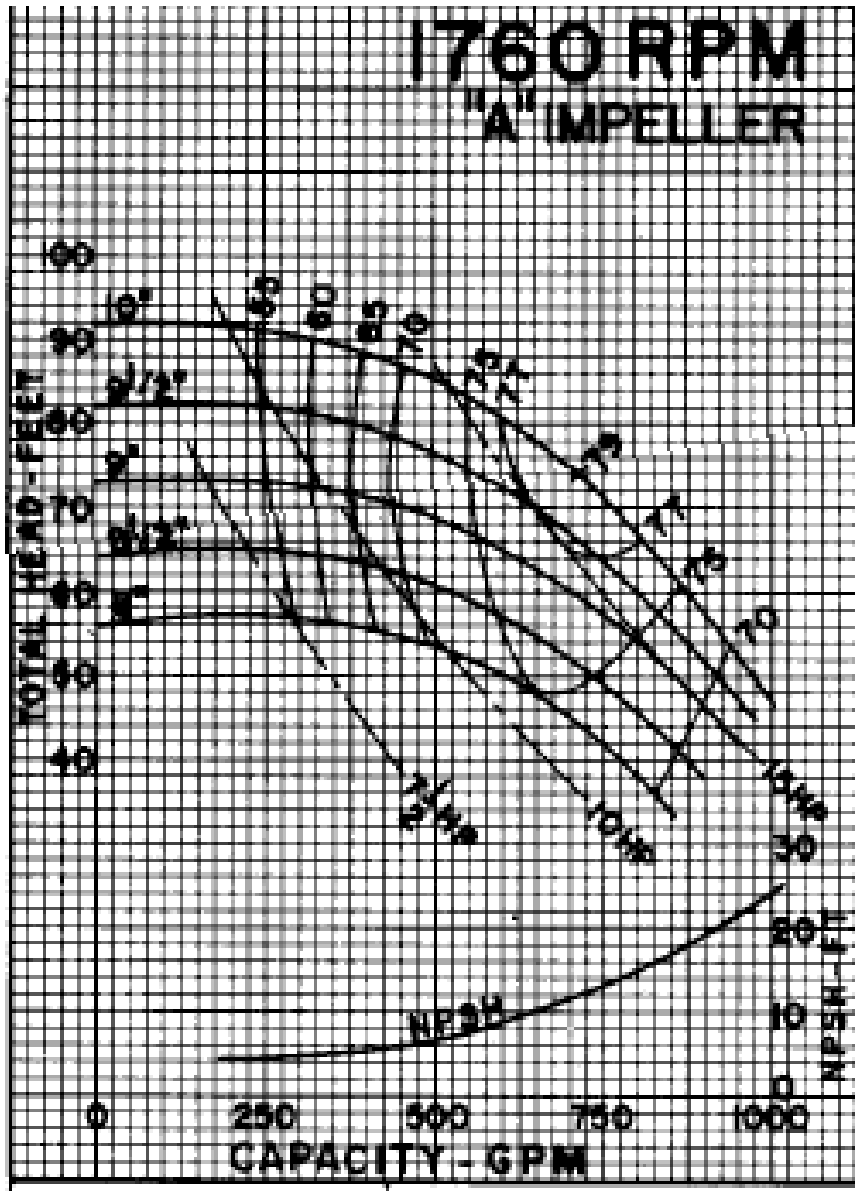

A-7295-R1	WORTHINGTON PUMP INC. — RATING CURVE	4LR-10"A"

horizontally split centrifugal pumps

LR-LLR

EYE AREA = 15.2 SQ. IN., MAX. DIA. SOLIDS = 7/16", MAX. SHAFT BHP AT 3550 RPM = 75, 1750 = 36

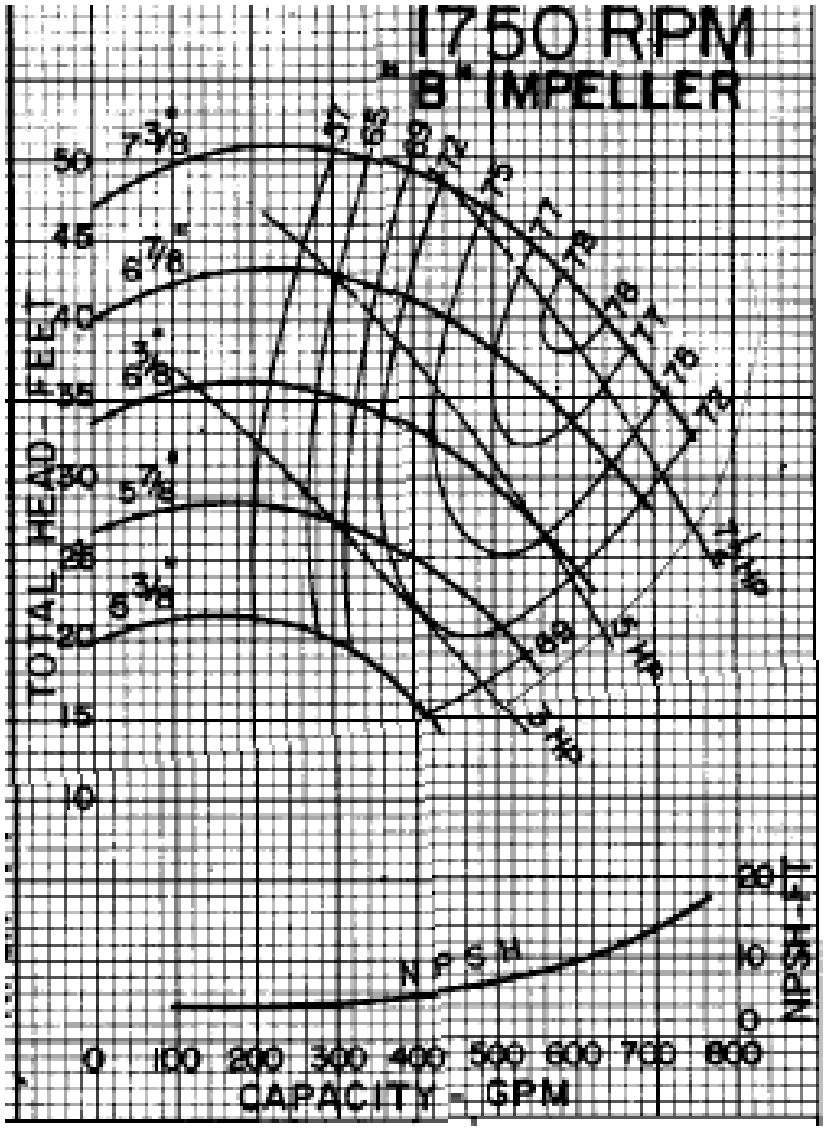

horizontally split centrifugal pumps

LR-LLR

EYE AREA = 18 SQ. IN., MAX. DIA. SOLIDS = ½", MAX. SHAFT BHP AT 3550 RPM = 75, 1760 = 36

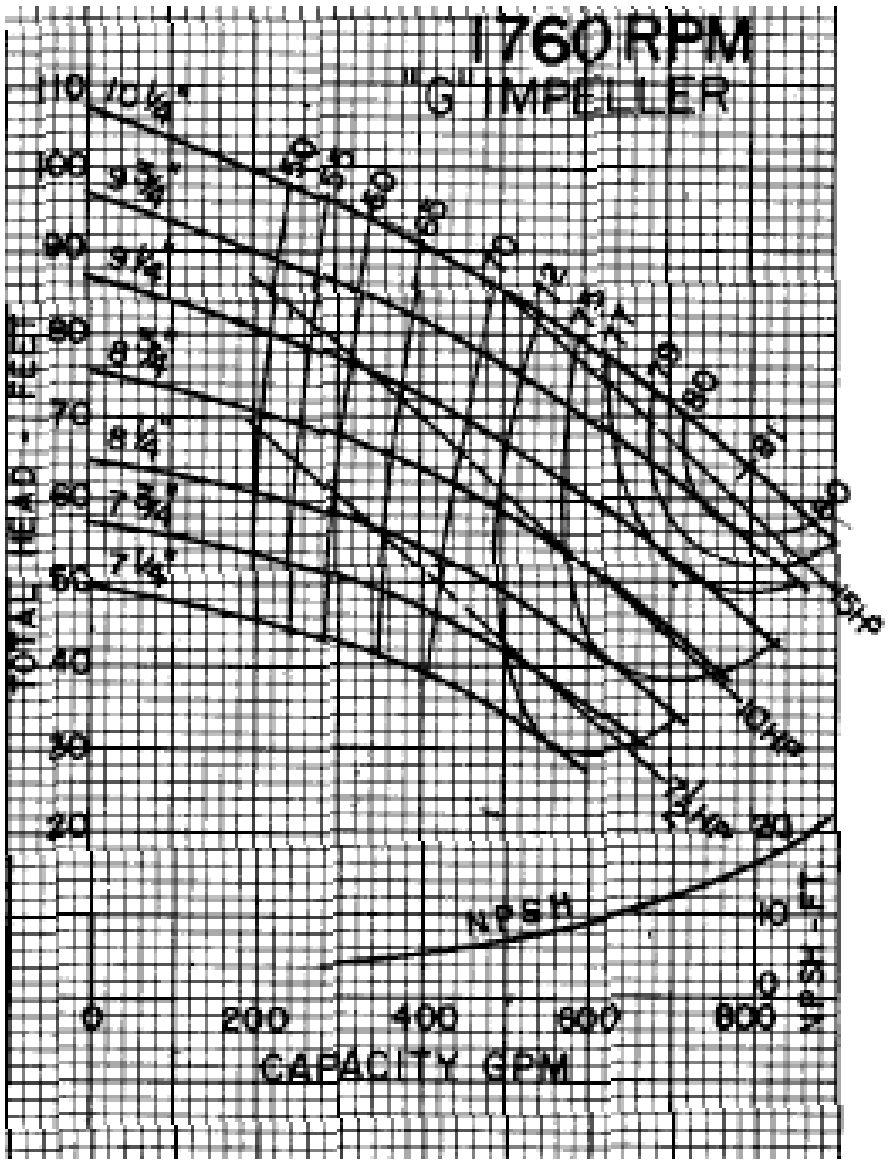

A-7297 RI	WORTHINGTON PUMP INC. – RATING CURVE	4 LR - 10

Minimum recommended flow – Sustained operation to the left of the slanted broken line could possibly result in shaft breakage due to fatigue.