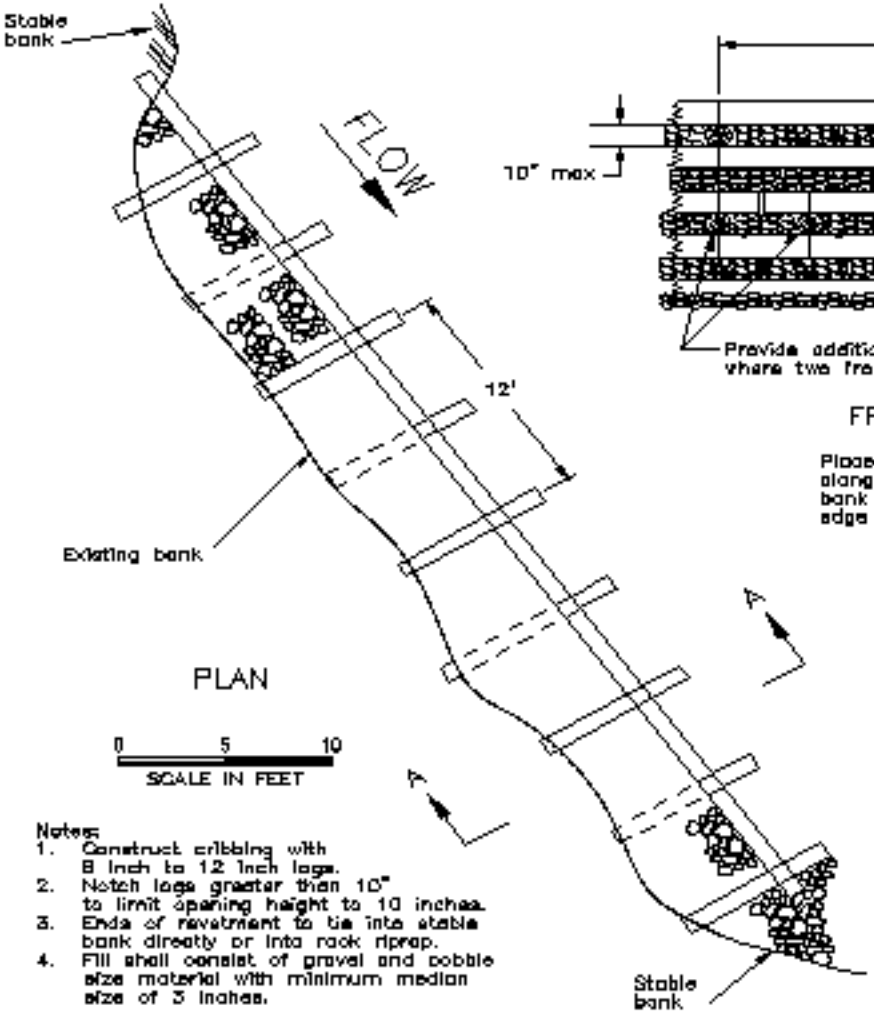

PLAN

0 5 10
SCALE IN FEET

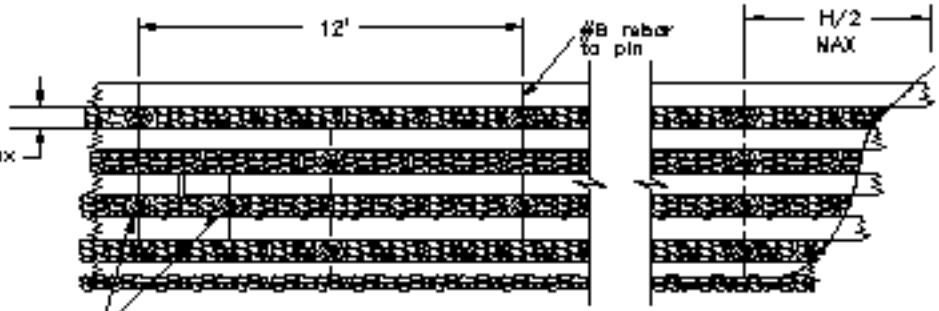

FRONT VIEW

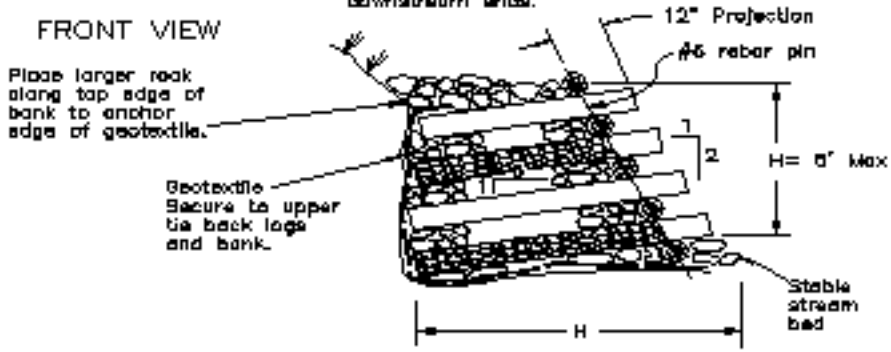

1 0 5
SCALE IN FEET

SECTION A

Notes:
1. Construct cribbing with 8 inch to 12 inch logs.
2. Notch logs greater than 10" to limit opening height to 10 inches.
3. Ends of revetment to tie into stable bank directly or into rock riprap.
4. Fill shall consist of gravel and cobble size material with minimum median size of 3 inches.

STREAMBANK PROTECTION	
LOG AND ROCK REVETMENT	
6' Bank	