Fig. 6310 PROPELLER PUMP PERFORMANCE CHART

1. The propeller pump performance curves shown are obtained by testing pumps with short column and enclosed discharge elbow with head measurements taken in a horizontal discharge pipe at least three pipe diameters beyond the elbow flange. For further details refer to data page.
2. Discharge column losses should be added when settings are deeper than 10 feet. Refer to data page.
3. For velocity head refer to data page.

100C-413 [illegible]
MIN. OF 2920 GPM AT 8 TOH, [illegible]

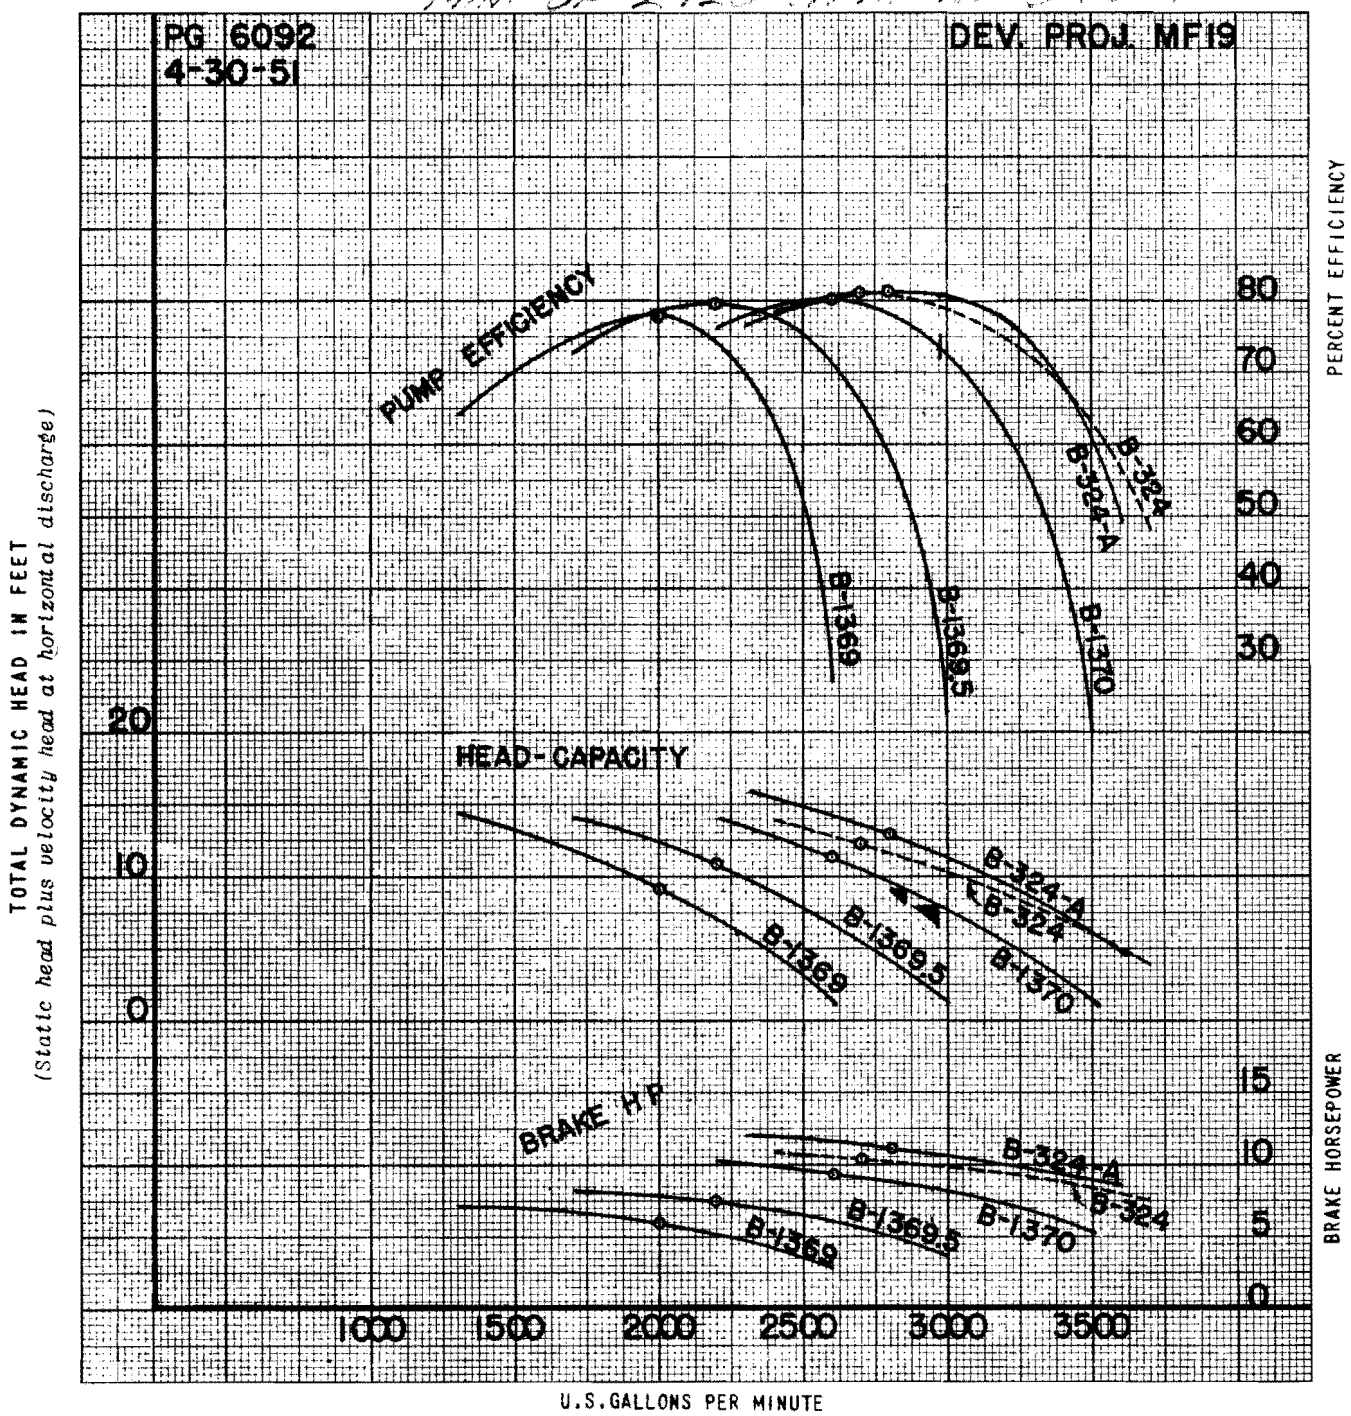

12" 6310	12" COLUMN	1160 RPM	ONE STAGE	PROPELLERS B1369 B1370 B1369.5 B324 B324-A

Fig.6310 PROPELLER PUMP PERFORMANCE CHART

1. The propeller pump performance curves shown are obtained by testing pumps with short column and enclosed discharge elbow with head measurements taken in a horizontal discharge pipe at least three pipe diameters beyond the elbow flange. For further details refer to data page.
2. Discharge column losses should be added when settings are deeper than 10 feet. Refer to data page.
3. For velocity head refer to data page.

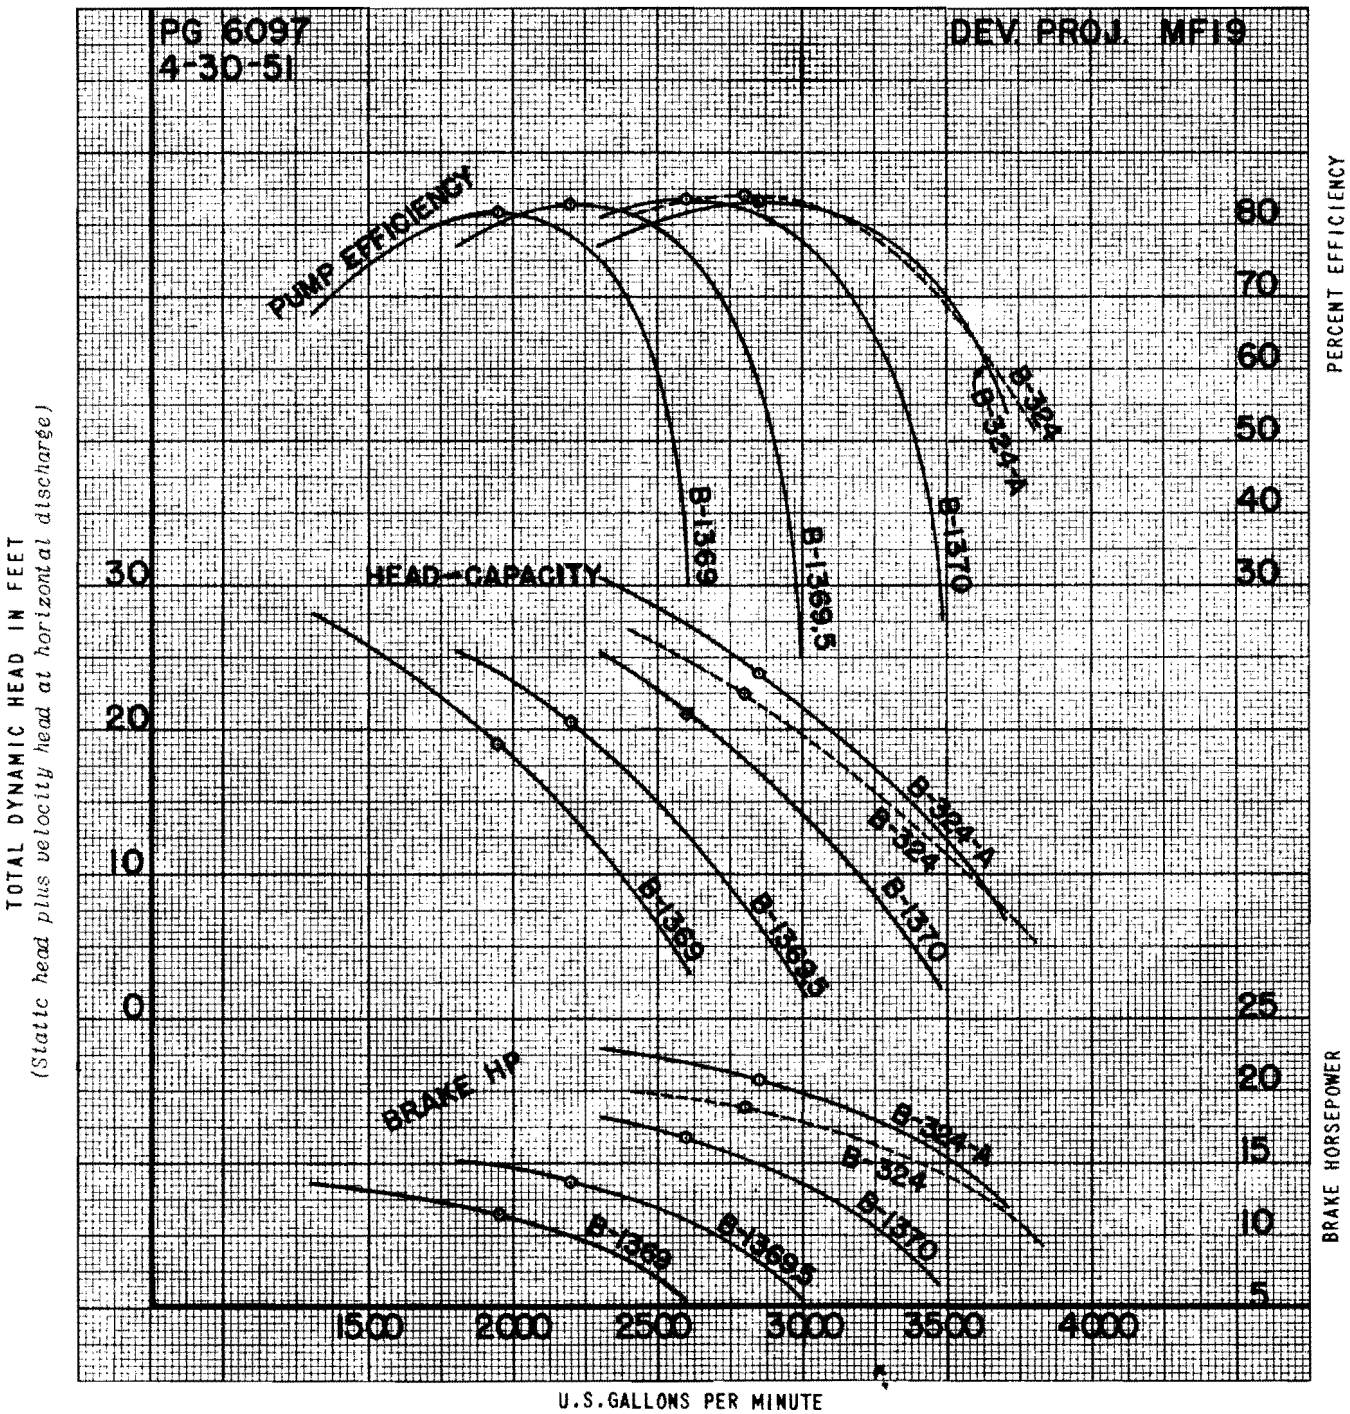

12" 6310	12" COLUMN	1160 RPM	TWO STAGE	PROPELLERS B1369 B1370 B1369.5 B324 B324-A