


VERTICAL TURBINE PUMPS SINGLE STAGE PERFORMANCE

**12XH
7000**

**1180
RPM**

ENCLOSED
IMPELLER
T9EA268A

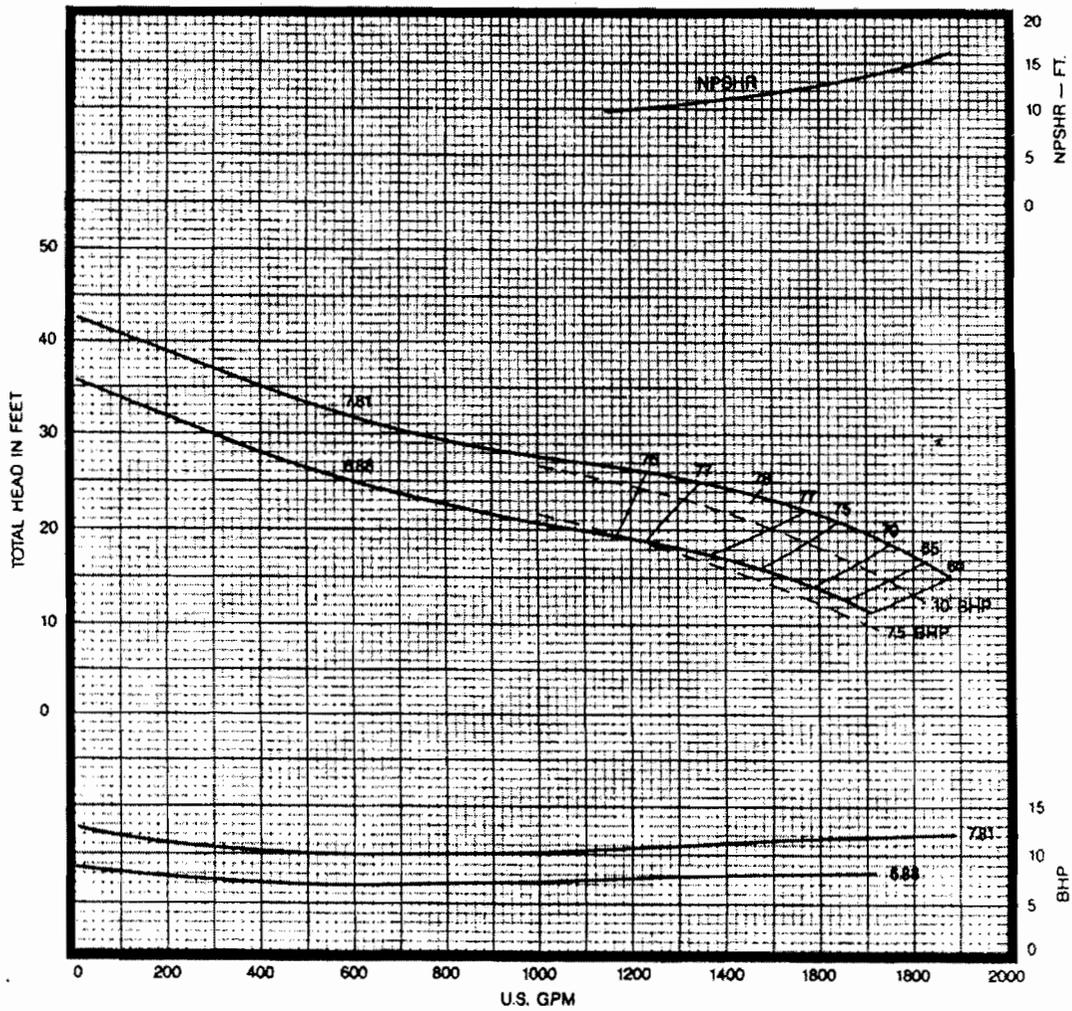

EFFICIENCY CORRECTIONS⁽¹⁾


NUMBER OF STAGES	EFFICIENCY CHANGE
1	-3.0 POINTS
2	-2.0 POINTS
3	-1.0 POINTS
4	NO CHANGE
5	NO CHANGE
6	NO CHANGE

BOWL MATERIAL	EFFICIENCY CHANGE
CAST IRON	-2.0 POINTS
ENAMELED C.I.	NO CHANGE

IMPELLER MATERIAL	EFFICIENCY CHANGE
CAST IRON	-2.0 POINTS
BRONZE	NO CHANGE
ENAMELED C.I.	NO CHANGE

(1) Refer to "Application and Reference Data" for head correction.

DIMENSIONS (Inches)

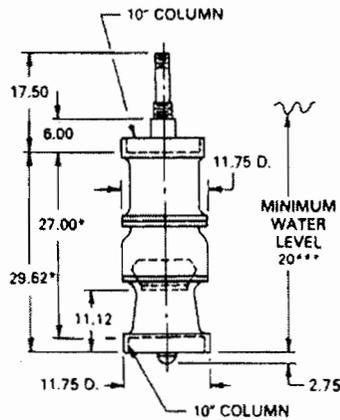

*Add 11.88 for each additional stage.

TECHNICAL DATA

DATA	VALUE
MAXIMUM OPERATING SPEED	2300 RPM
MAXIMUM NUMBER OF STAGES	16**
IMPELLER SHAFT DIAMETER	1 1/4" IN.
IMPELLER EYE AREA	33.38 SQ. IN.
MAXIMUM SPHERE SIZE	.81 IN.
K _t (THRUST FACTOR)	12.02 LBS./FT.
K _r (ROTOR WT. PER STAGE)	19.00 LBS.
BOWL WT. (FIRST STAGE)	340 LBS.
BOWL WT. (EACH ADD'L. STAGE)	130 LBS.
ALLOWABLE SHAFT STRETCH	1.35 IN.**
WK ² (FIRST STAGE)	2.67 LBS.-FT. ²
WK ² (EACH ADD'L. STAGE)	2.60 LBS.-FT. ²
BOWL RING CLEARANCE	.011/.016 IN.

** These are nominal values. Refer to "Application and Reference Data" for information further limiting or extending these values.

*** This value is the minimum submergence required to prevent vortexing only. This value may need to be increased to provide adequate NPSHA.