


GOULDS PROPOSAL NO.	GOULDS S.O. NO.	INQUIRY NO.	CUSTOMER P.O. NO.	P.O. DATE	ITEM NO.	CUSTOMER
PROJECT	SERVICE		GPM CAPACITY	FT. TDH	% EFFICIENCY	RPM

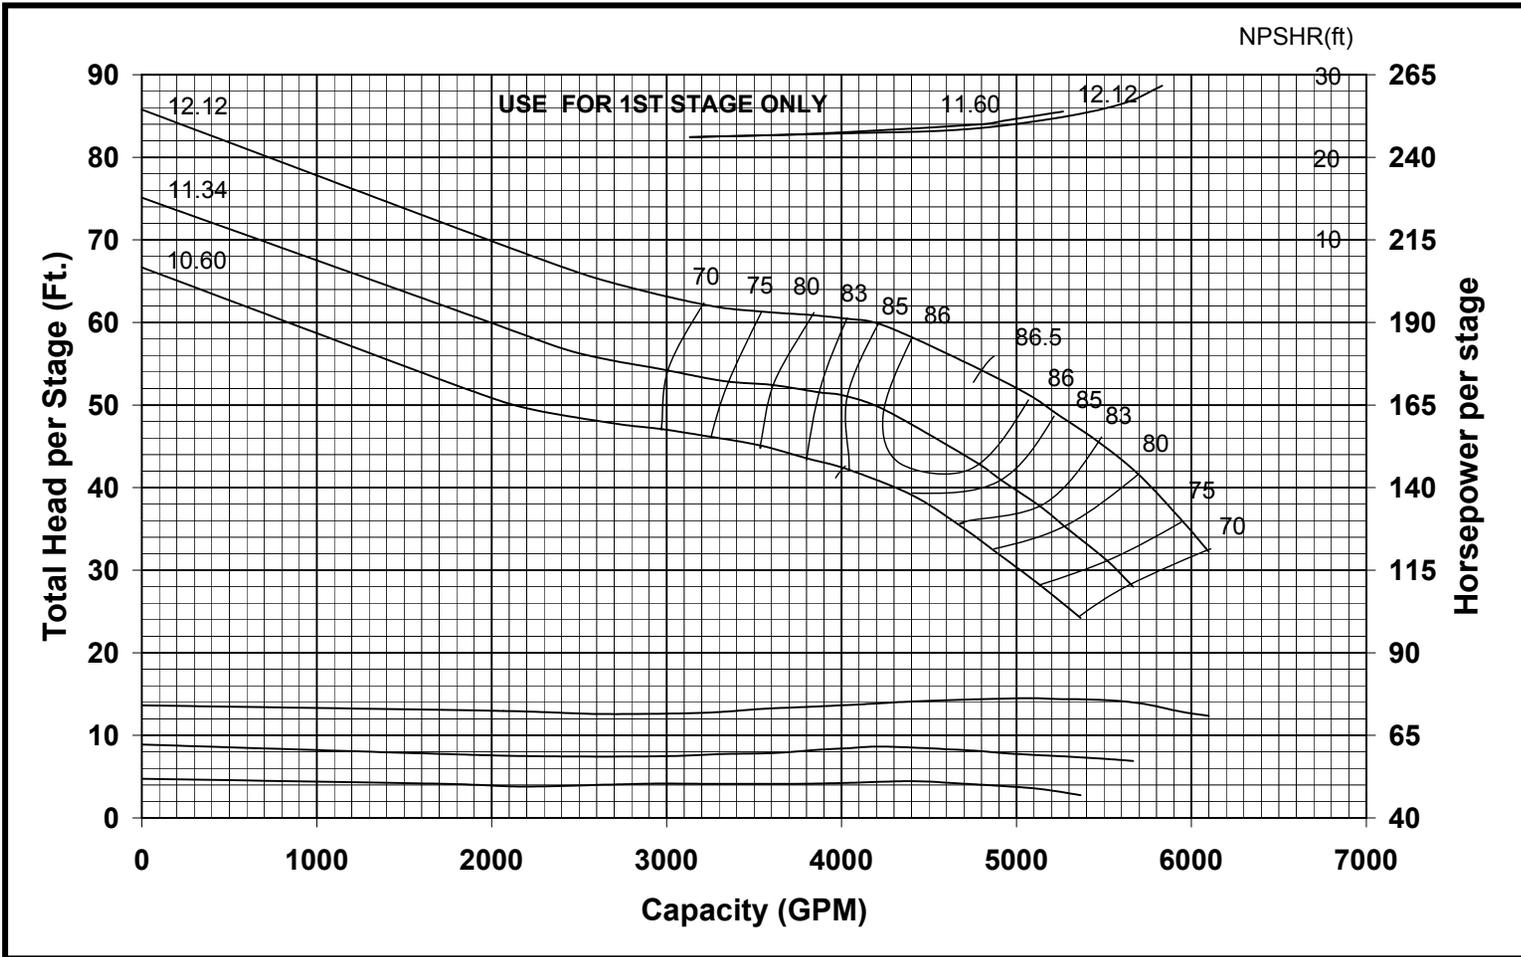

Curve No.	
E6618GGPC0	
Model	18GHXC
RPM	1180
EFFICIENCY CORRECTION	
1-STAGE	
2-STAGE	
3-STAGE	
Bal. Imp.	
Impeller	ENCLOSED
Ns =	4255
K =	39.5 LBS/FT
K(Bal.)=	N/A
Bowl O.D.	18.50"
Bowl Lateral	1.14"
Max. PSI	225
Mim. Subm.	46"
GOULDS PUMPS	
TURBINE OPERATIONS	
Lubbock, Texas	
BOWL PERFORMANCE CURVE BASED ON PUMPING CLEAR, NON-AERATED WATER. RATED POINT ONLY IS GUARANTEED. CURVES REPRESENT SINGLE STAGE PERFORMANCE BASED ON TEST OF MULTI-STAGE BOWL ASSEMBLY. EFFICIENCY CORRECTION IS REQUIRED FOR LESSER STAGES.	