


GOULDS PROPOSAL NO.	GOULDS S.O. NO.	INQUIRY NO.	CUSTOMER P.O. NO.	P.O. DATE	ITEM NO.	CUSTOMER
PROJECT	SERVICE		GPM CAPACITY	FT. TDH	% EFFICIENCY	RPM

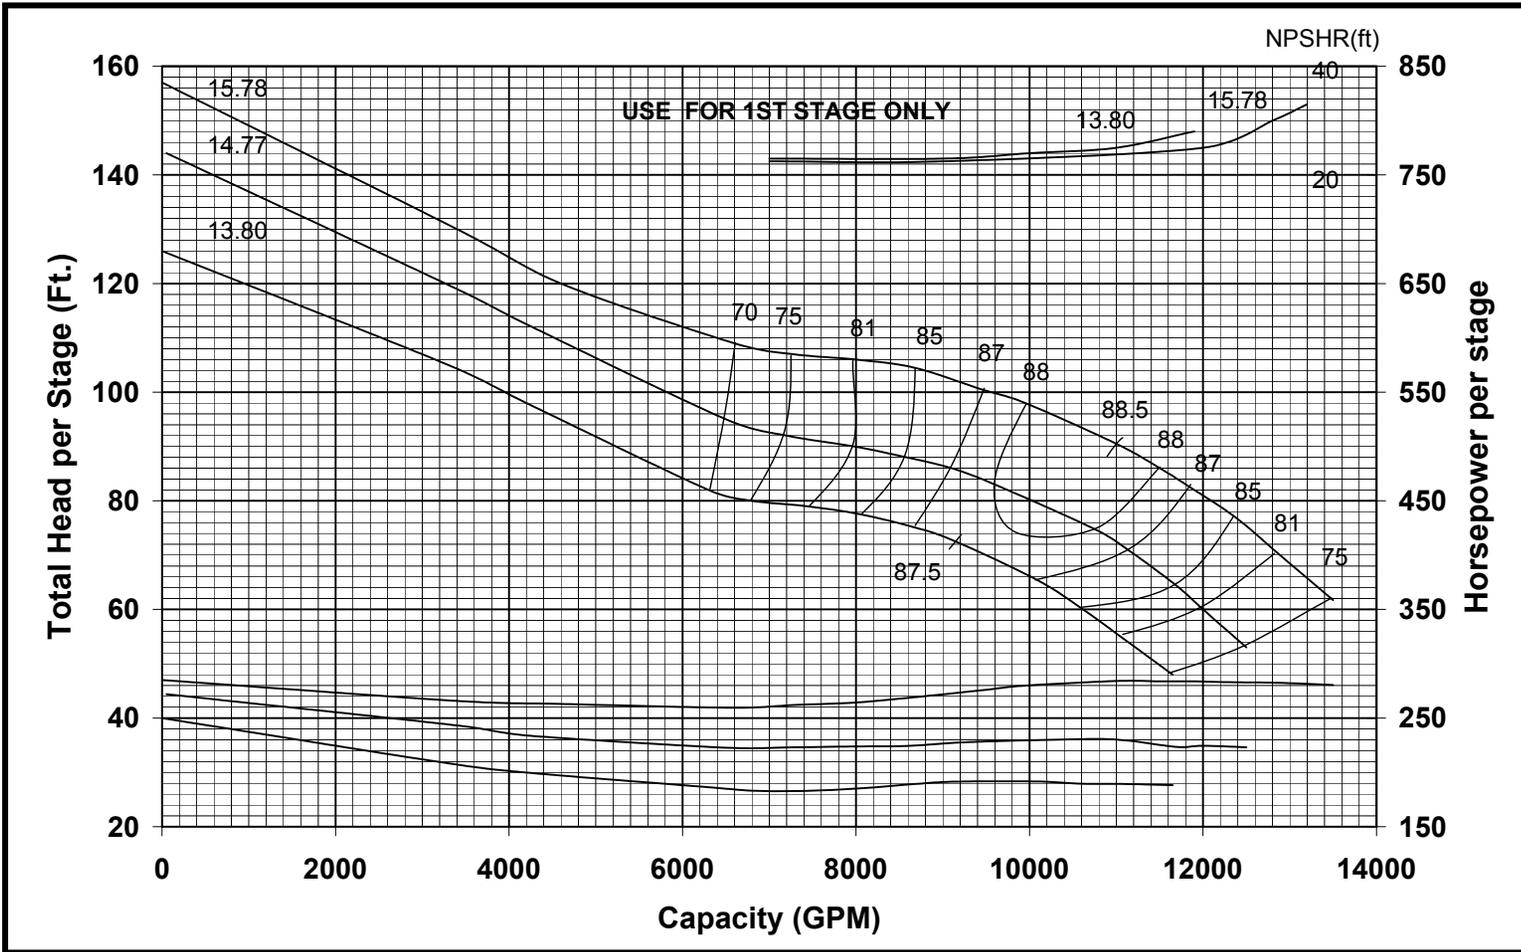

Curve No.	
E6624GGPC1	
Model	24GHXC
RPM	1180
EFFICIENCY CORRECTION	
1-STAGE	
2-STAGE	
3-STAGE	
Bal. Imp.	
Impeller	ENCLOSED
Ns =	4174
K =	68.7 LBS/FT
K (Bal.)=	N/A
Bowl O.D.	24.25"
Bowl Lateral	1.62"
Max. PSI	300
Min. Subm	57"
GOULDS PUMPS	
TURBINE OPERATIONS	
Lubbock, Texas	
BOWL PERFORMANCE CURVE BASED ON PUMPING CLEAR, NON-AERATED WATER. RATED POINT ONLY IS GUARANTEED. CURVES REPRESENT SINGLE STAGE PERFORMANCE BASED ON TEST OF MULTI-STAGE BOWL ASSEMBLY. EFFICIENCY CORRECTION IS REQUIRED FOR LESSER STAGES.	