

Curve No. 1134

Size: 14 JLC

RPM: 1770

EFFICIENCY CHANGE

STGS.	1	- 3
	2	- 1

PERF. BASED ON:  
BRZ. IMPELLERS &  
C.I. VITRIGLASS  
ENAMELLED BOWLS

Impeller = CLOSED

K = 14.9 Lbs./Ft.  
22.1 Kg./M.

K (Bal.) =



VERTICAL PUMP DIVISION  
CITY OF INDUSTRY, CALIFORNIA

Characteristic based upon pumping clear, non-aerated water.

Rating point only is guaranteed. Column losses not included.


FEET  
140  
100  
60  
20

METRES  
40  
30  
20  
10

- PER STAGE -  
STAGES

TOTAL HEAD  
TOTAL HEAD

CAPACITY  
U.S. GPM  
CU. METRES PER HR

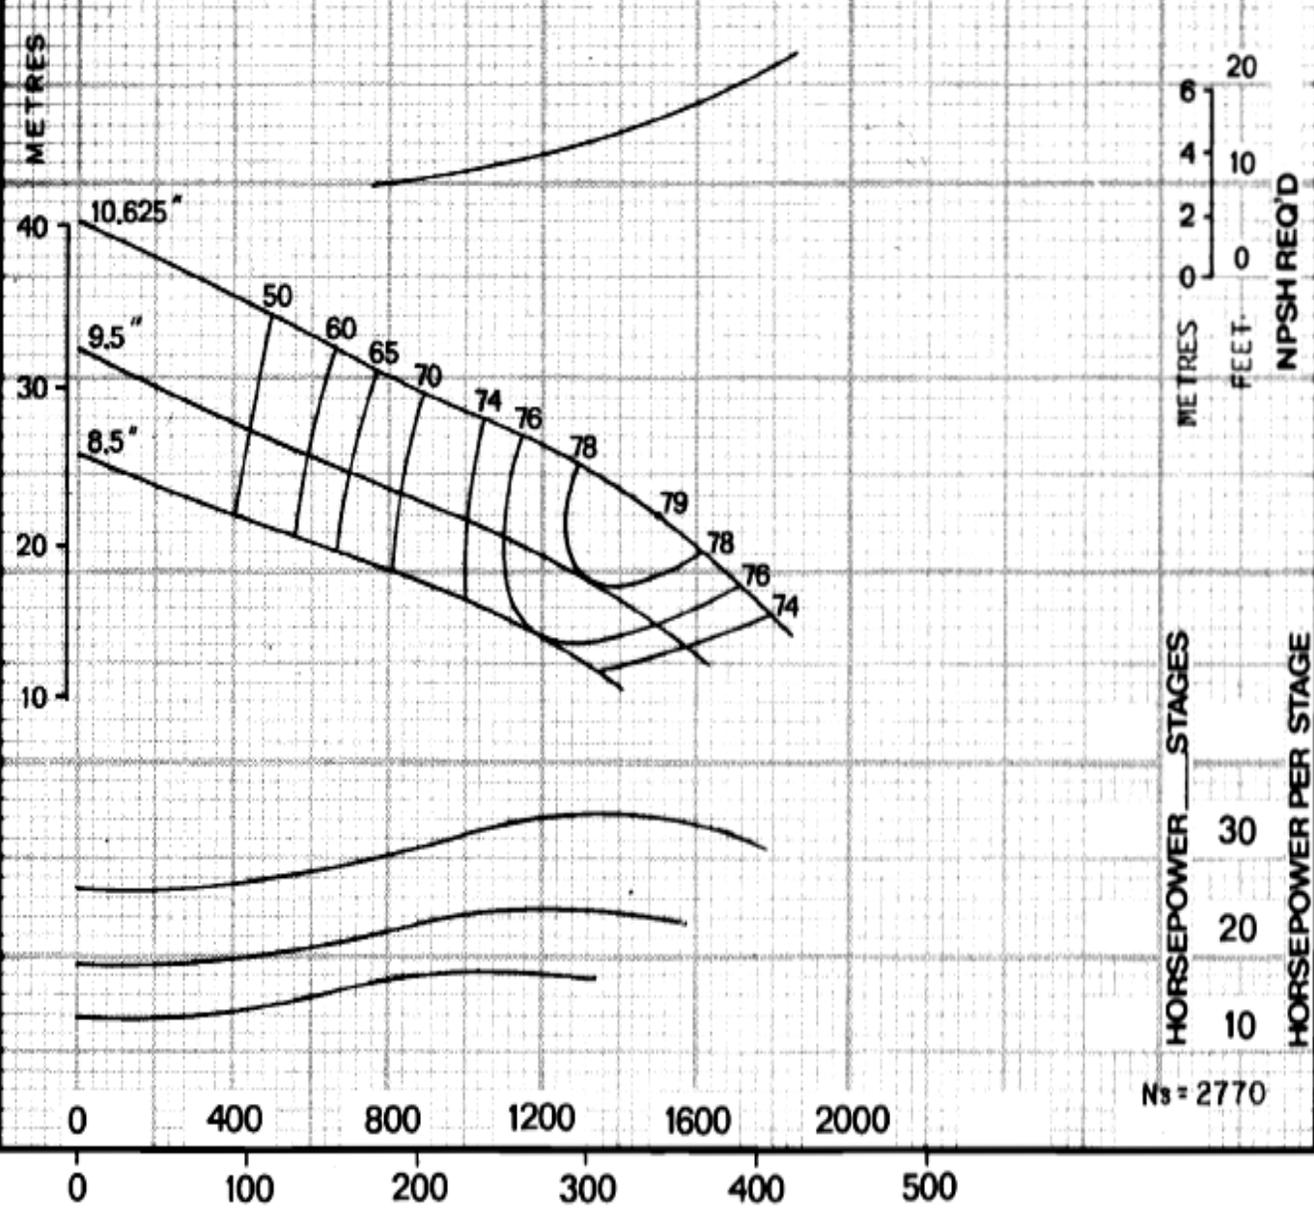

NPSH REQ'D  
METRES  
FEET

HORSEPOWER PER STAGE  
STAGES  
HORSEPOWER PER STAGE

Ns = 2770