


GOULDS PROPOSAL NO.	GOULDS S.O. NO.	INQUIRY NO.	CUSTOMER P.O. NO.	P.O. DATE	ITEM NO.	CUSTOMER
PROJECT	SERVICE		GPM CAPACITY	FT. TDH	% EFFICIENCY	RPM

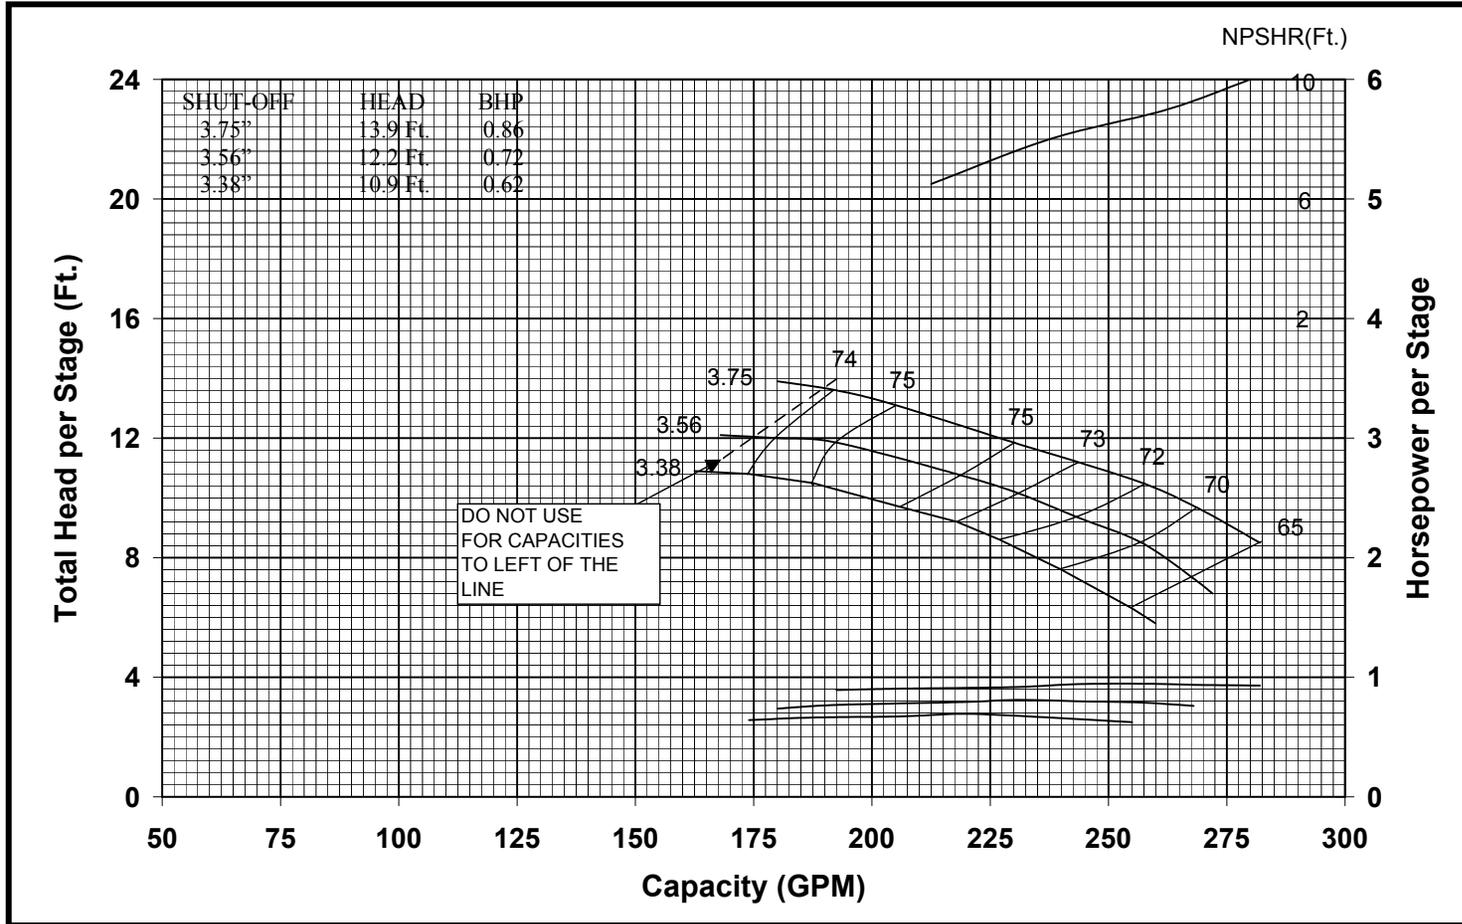

<b>Curve No.</b>	
<b>E6406DDPC2</b>	
<b>Model 6DHHO</b>	
<b>RPM 1770</b>	
<b>EFFICIENCY CORRECTION</b>	
1-STAGE	-3.0
2-STAGE	-2.0
3-STAGE	-1.0
4-STAGE	
<b>Impeller OPEN</b>	
<b>Ns = 3950</b>	
<b>K = 5.6 LBS/FT</b>	
<b>K(Bal.)= N/A</b>	
Bowl O.D.	5.44"
Bowl Lateral	0.44"
Max. PSI	200
Disch size	3", 4"
<b>GOULDS PUMPS</b>	
<b>TURBINE OPERATIONS</b>	
Lubbock, Texas	
BOWL PERFORMANCE CURVE BASED ON PUMPING CLEAR, NON-AERATED WATER. RATED POINT ONLY IS GUARANTEED. CURVES REPRESENT SINGLE STAGE PERFORMANCE BASED ON TEST OF MULTI-STAGE BOWL ASSEMBLY. EFFICIENCY CORRECTION IS REQUIRED FOR LESSER STAGES.	