PER STAGE	IMP. DIA.	IMP. EXIT	IMPELLER PART NO. 2827	THRUST CONSTANT 48·0	PUMP SHAFT DIAM. $1\frac{1}{2}$
			IMPELLER PATTERN NO. 2800	WR² 1·9 LB. FT²/STAGE	

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 56"

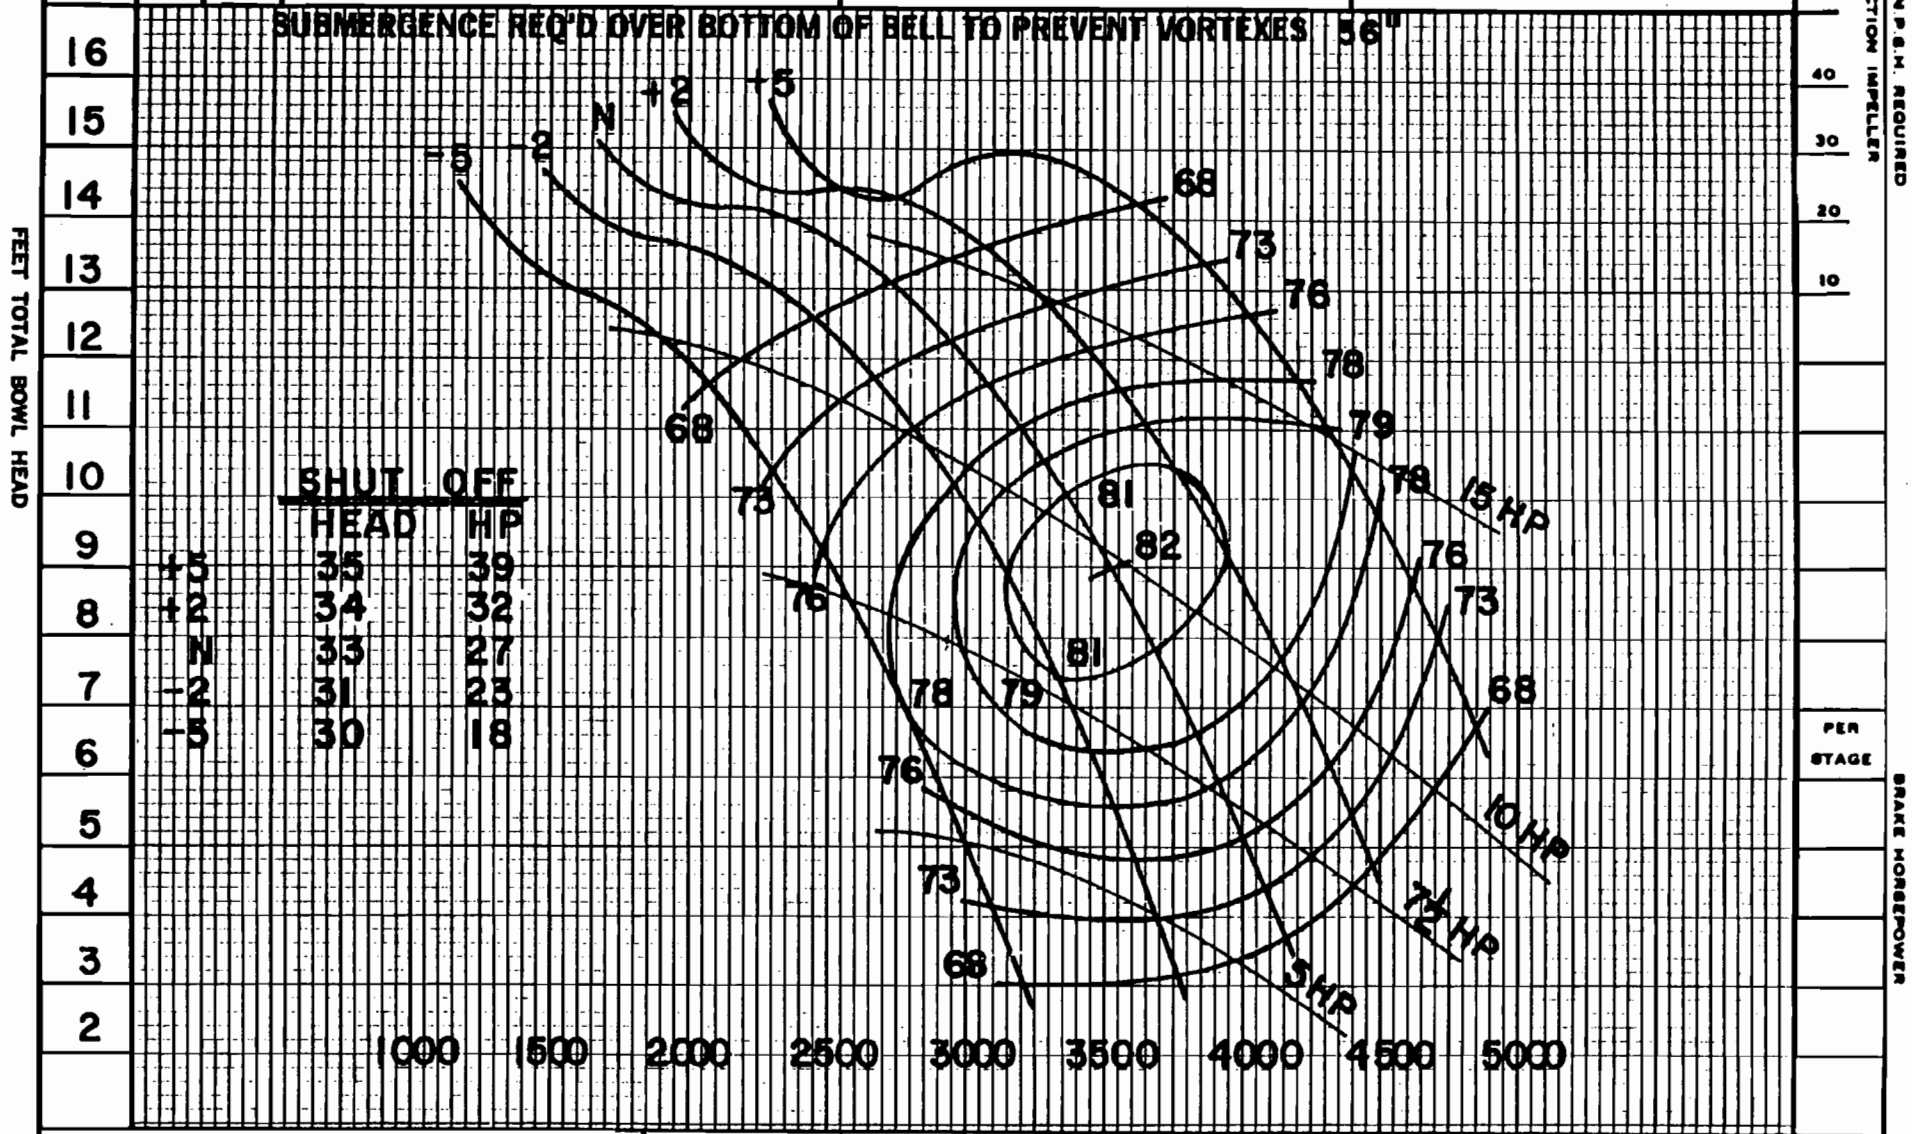

SHUT OFF	HEAD	HP
+5	35	39
+2	34	32
N	33	27
-2	31	23
-5	30	18

U.S. GALLONS PER MINUTE

PERFORMANCE BASED ON MULTISTAGE TESTS PUMPING CLEAR COLD WATER SP. GR. 1.0

FOR 1 STAGE MULTIPLY HEAD & EFF. BY 1·0

FOR 2 STAGES MULTIPLY HD. & EFF. BY 1·0

THE IDEAL PUMP COMPANY
PO BOX 922
STUTTGART, AR 72160

12PO PROPELLER PUMP 1160 RPM

IMPELLER — BRONZE BOWL — CAST IRON