PER STAGE	IMP. DIA.	IMP. EXIT	IMPELLER PART NO. 16623	THRUST CONSTANT 14	PUMP SHAFT DIAM. 1"
			IMPELLER PATTERN NO. 16025	WR² .32 LB. FT²/STAGE	

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 21 INCHES

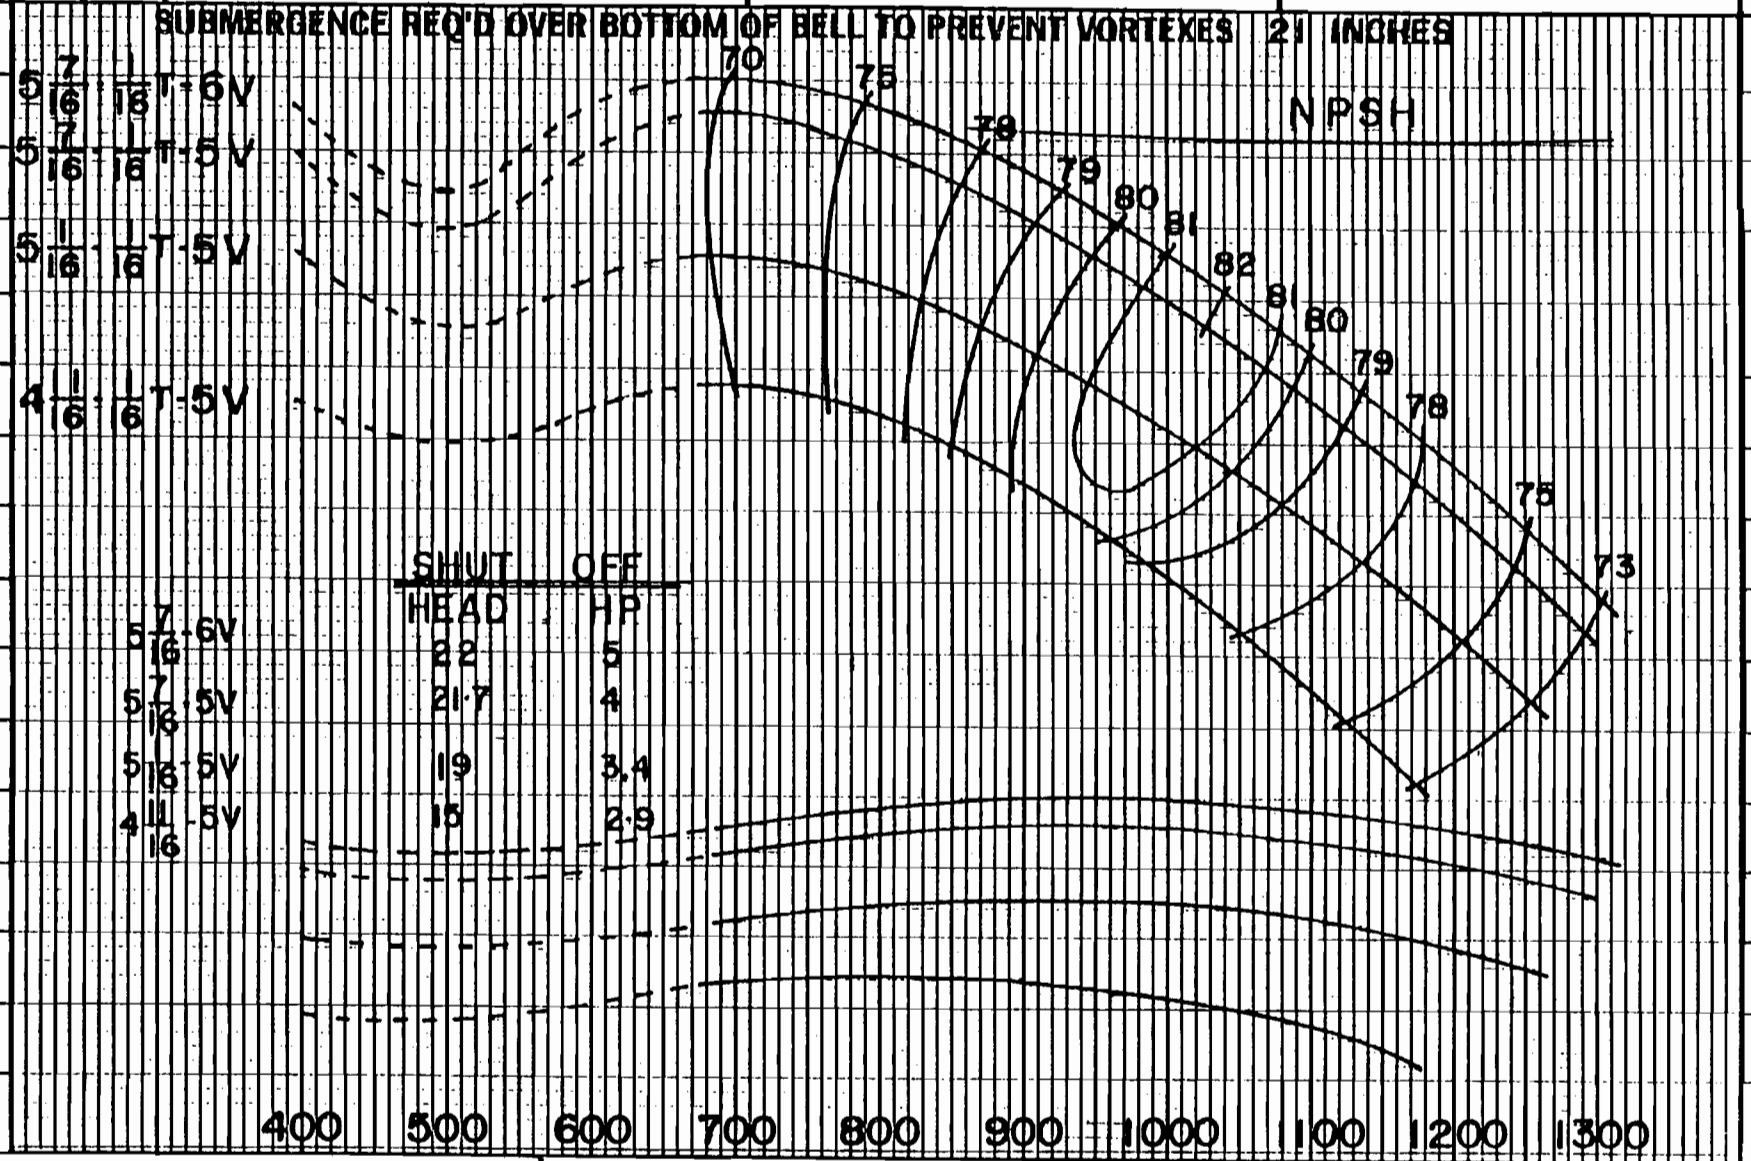

PERFORMANCE BASED ON MULTISTAGE TESTS PUMPING CLEAR COLD WATER SP. GR. 1.0

FOR 1 STAGE MULTIPLY HEAD & EFF. BY 1.0

FOR 2 STAGES MULTIPLY HD. & EFF. BY 1.0

THE IDEAL PUMP COMPANY
PO BOX 922
STUTTGART, AR 72160

8 PS MIXED-FLOW PUMP

IMPELLER — BRONZE

CLASS 'C' FIN.

1160 RPM

BOWL — CAST IRON