PER STAGE	IMP. DIA	IMP. EXIT	IMPELLER PART NO. 9937	THRUST CONSTANT 282	PUMP SHAFT DIAM. 4"
			IMPELLER PATTERN NO. 9298	WR² 560 LB. FT²/STAGE	

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 89 INCHES

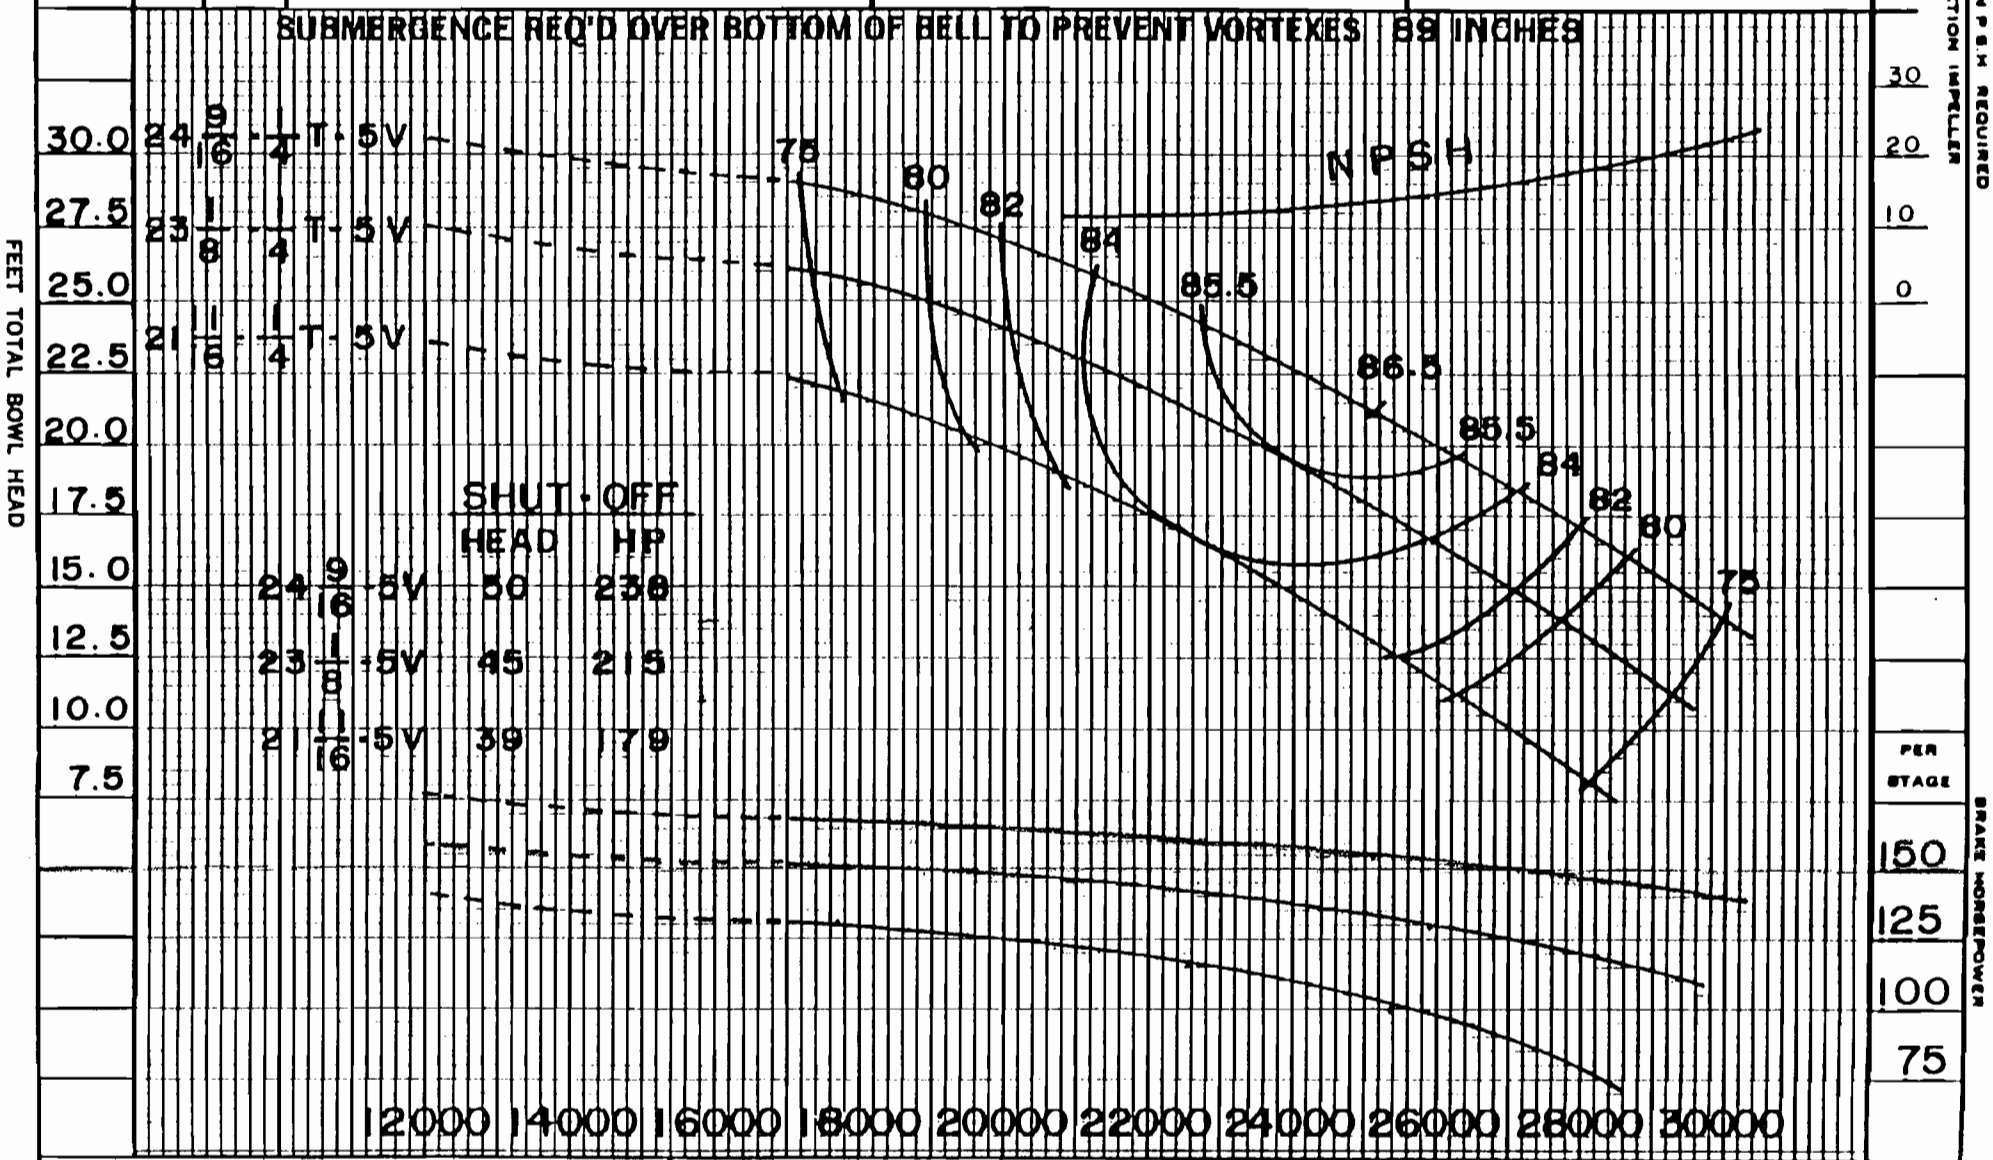

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP GR 1.0
FOR 1 STAGE MULTIPLY HEAD & EFF BY 1.0
FOR 2 STAGES MULTIPLY HD & EFF BY 1.0

THE IDEAL PUMP COMPANY
PO BOX 922
STUTTGART, AR 72160

36LS MIXED-FLOW PUMP
IMPELLER — BRONZE
CLASS 'C' FIN.

390 RPM
BOWL — CAST IRON