PER STAGE	IMP. DIA.	IMP. EXIT	IMPELLER PART NO. 13539	THRUST CONSTANT 87	PUMP SHAFT DIAM. 2 11/16"
			IMPELLER PATTERN NO. 9294	WR² 29 LB. FT²/STAGE	

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 50 INCHES

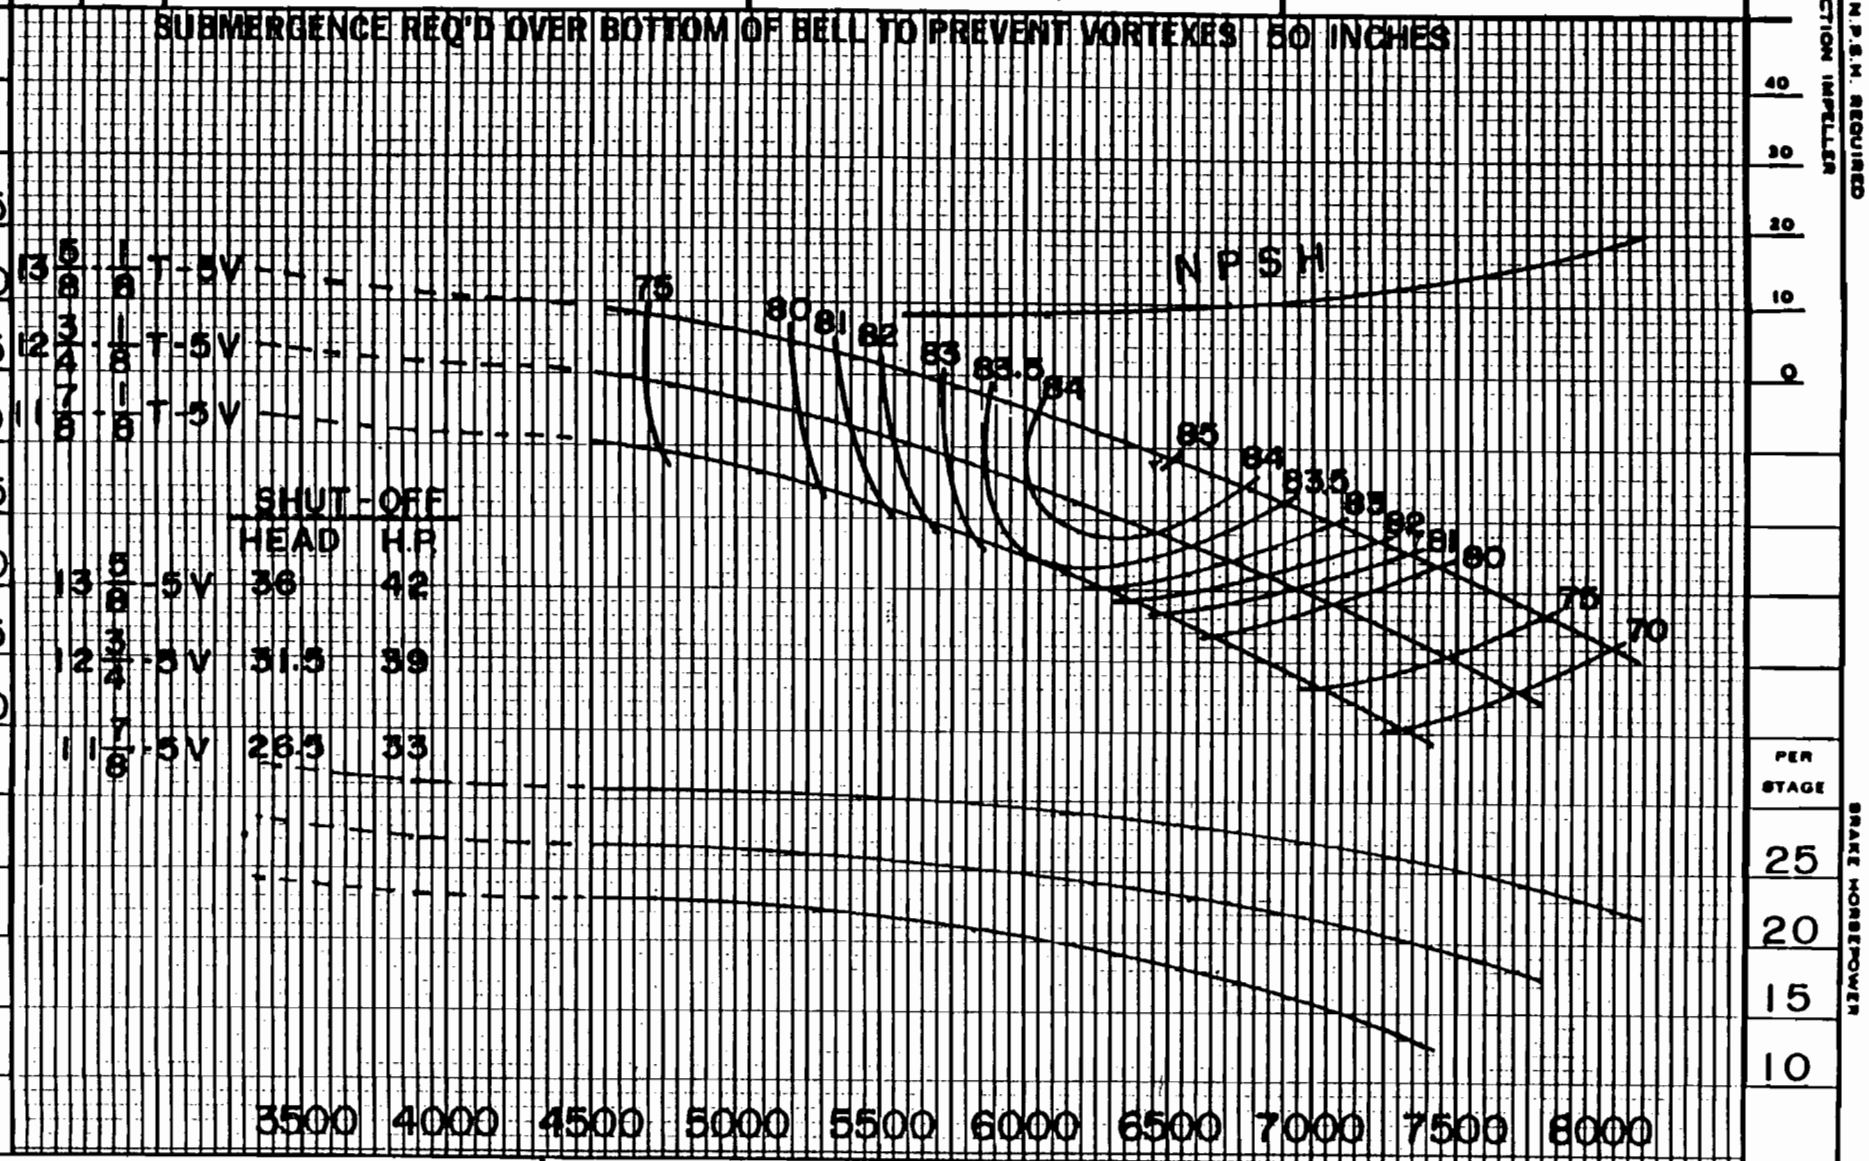

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP GR 1.0

FOR 1 STAGE MULTIPLY HEAD & EFF. BY 1.0

FOR 2 STAGES MULTIPLY HD & EFF. BY 1.0

THE IDEAL PUMP COMPANY
PO BOX 922
STUTTGART, AR 72160

20LS MIXED-FLOW PUMP — 590 RPM

IMPELLER — BRONZE BOWL — CAST IRON

CLASS 'C' FIN.