PER STAGE	IMP. DIA.	IMP. EXIT	IMPELLER PART NO. 2855	THRUST CONSTANT 135	PUMP SHAFT DIAM. $1\frac{15}{16}$
			IMPELLER PATTERN NO. 2806	WR² 18 LB. FT²/STAGE	

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 59"

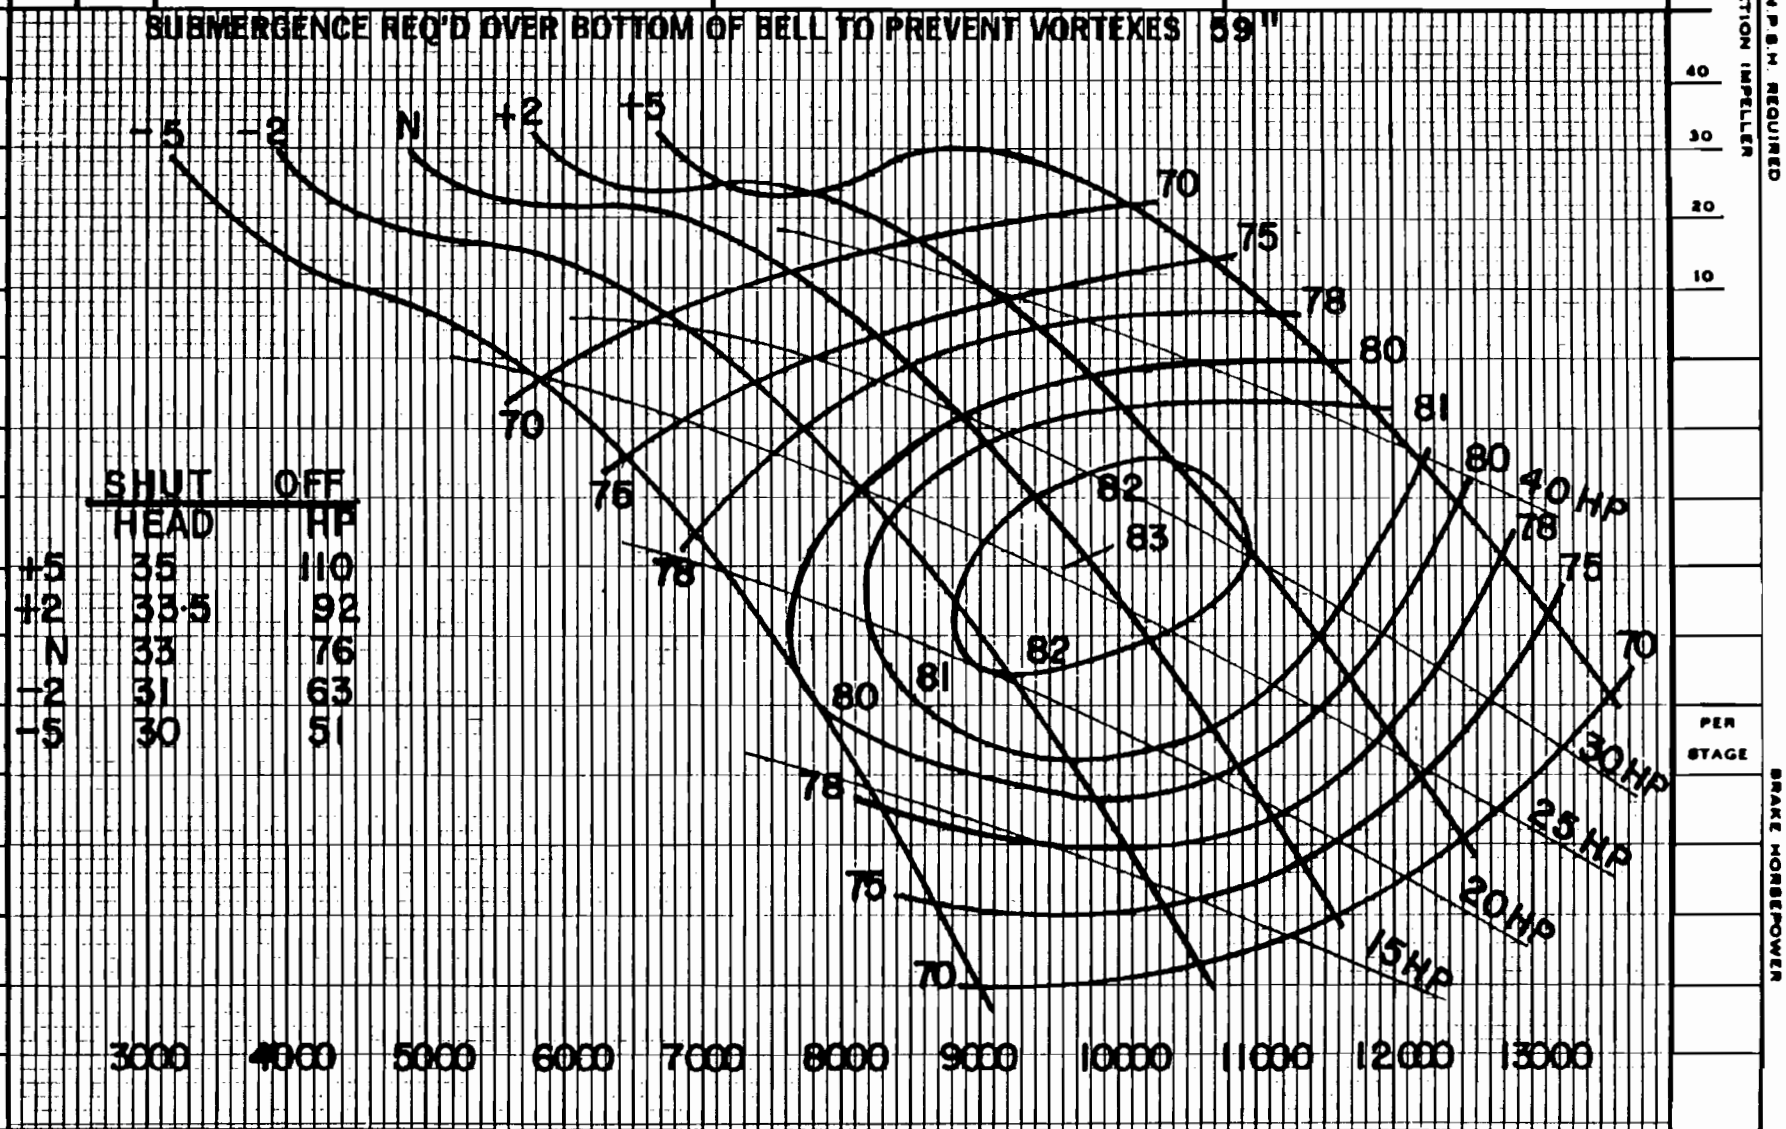

	SHUT OFF HEAD	SHUT OFF HP
+5	35	110
+2	33.5	92
N	33	76
-2	31	63
-5	30	51

U.S. GALLONS PER MINUTE

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP. GR. 1.0
FOR 1 STAGE MULTIPLY HEAD & EFF. BY 1.0
FOR 2 STAGES MULTIPLY HD. & EFF. BY 1.0

THE IDEAL PUMP COMPANY
PO BOX 922
STUTTGART, AR 72160

20 PO PROPELLER PUMP 700 RPM
IMPELLER — BRONZE BOWL — CAST IRON