Ingersoll-Dresser Pumps

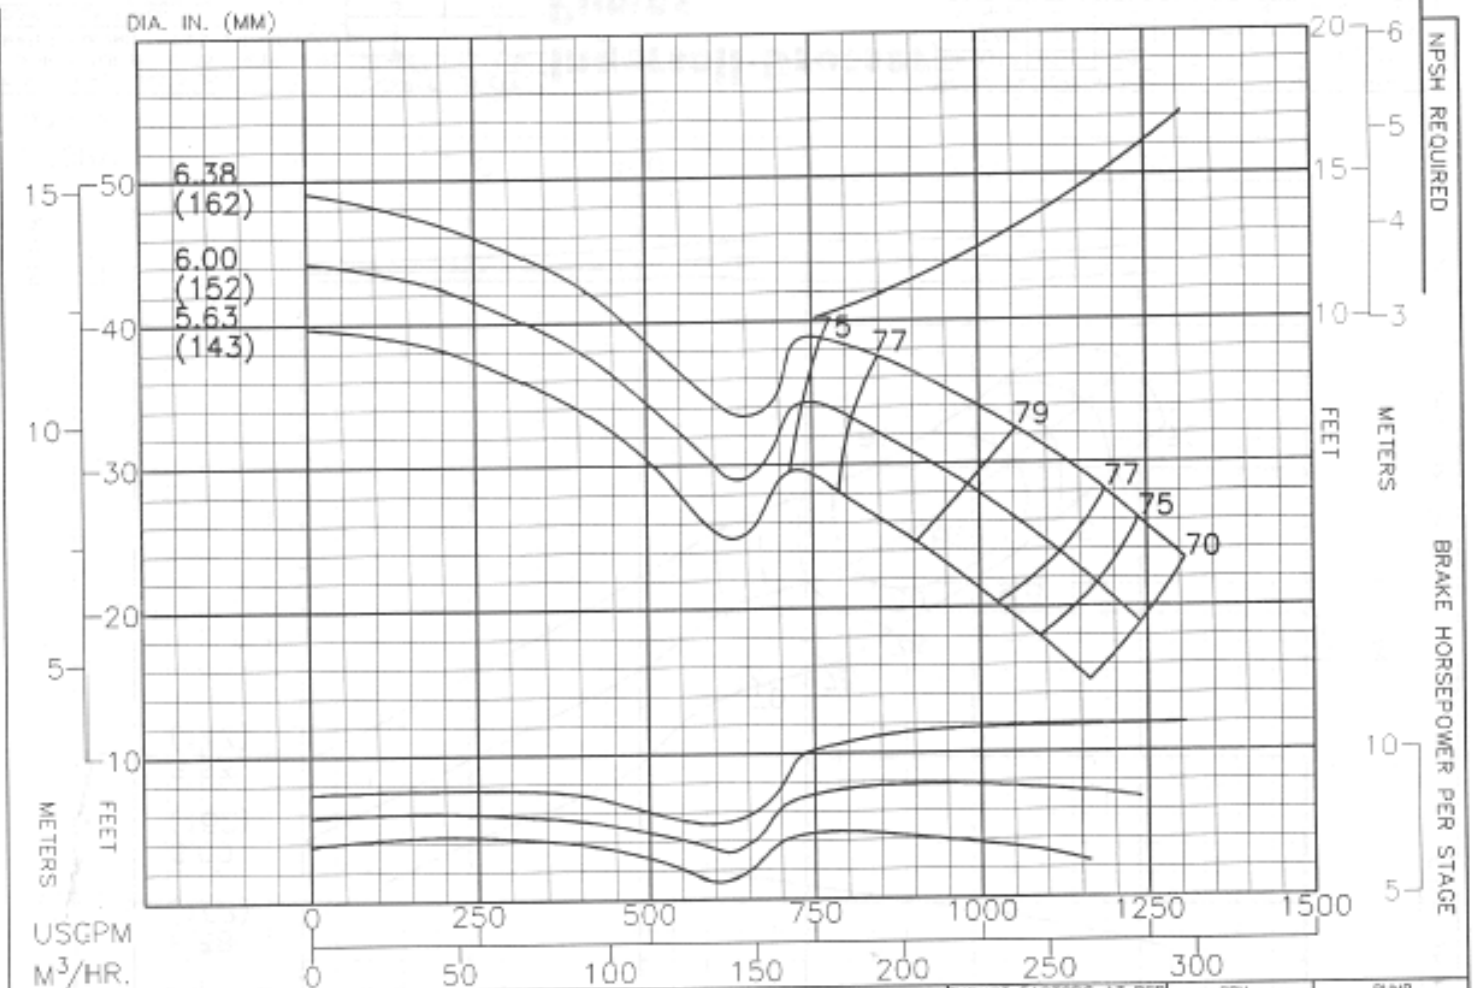

PERFORMANCE BASED ON PUMPING CLEAR WATER BELOW 85°F. WITH LISTED MATLS. COLUMN LOSSES NOT INCLUDED.	CHANGE IN EFF. STAGES	POINTS
	1	-2
	2	-1
	3	0
BOWL – CAST IRON		
IMPELLER – BRONZE		

Ingersoll-Dresser Pumps

THRUST FACTORS AT BEP			RPM	PUMP
IMPELLER	LBS/FT	KG/M	1770	10DH
STANDARD	15.5	23.1	SEMIOPEN IMPELLER	CURVE NO.
BALANCED	---	---		EC-1897
EYE AREA-22.0 SQ. IN.			N_S = 4240	

© 1993 Ingersoll-Dresser Pump Company
Printed in U.S.A.

Back of Sheet 520.21