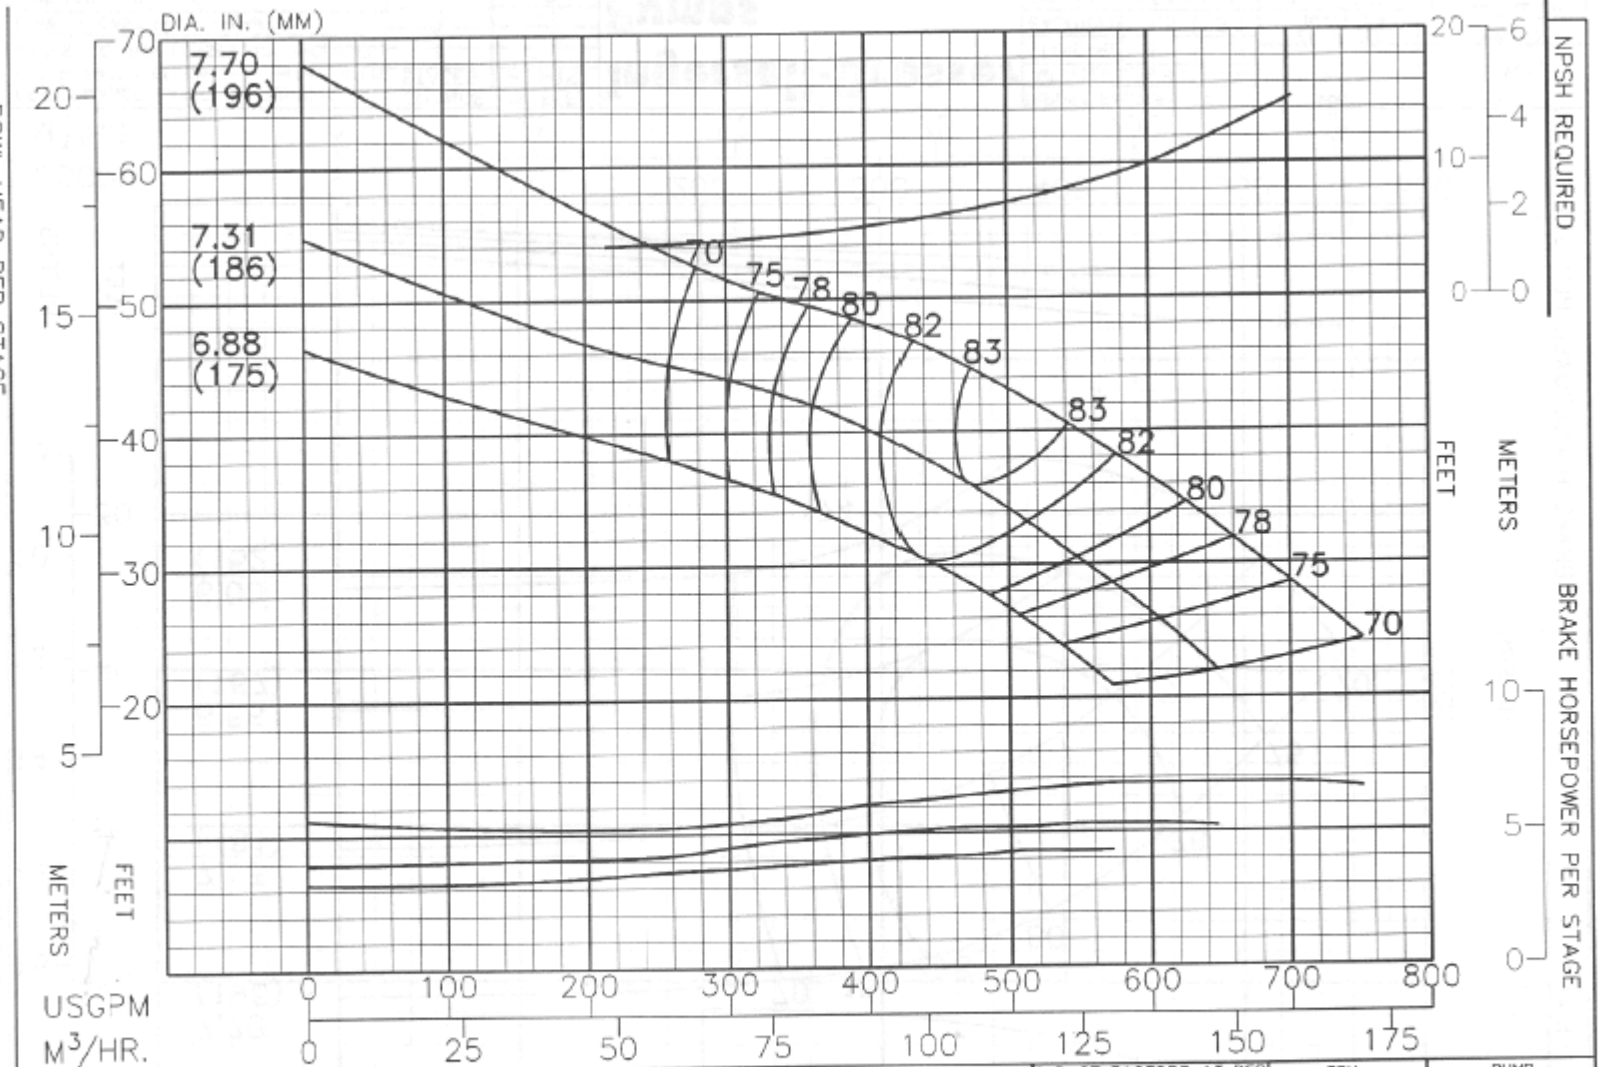

PERFORMANCE BASED ON PUMPING CLEAR WATER BELOW 85°F. WITH LISTED MATLS. COLUMN LOSSES NOT INCLUDED.	CHANGE STAGES	IN EFF. POINTS
	1	−2
	2	−1.5
	3	−1
BOWL – CAST IRON – LINED		
IMPELLER – BRONZE		

Ingersoll-Dresser Pumps

THRUST FACTORS AT BEP		
IMPELLER	LBS/FT	KG/M
STANDARD	4.31	6.42
BALANCED	---	---
EYE AREA– 11.2 SQ. IN.		

RPM	PUMP
1770	10M41
ENCLOSED IMPELLER	CURVE NO.
N_s = 2390	EC–2366

© 1993 Ingersoll-Dresser Pump Company
Printed in U.S.A.

Back of Sheet 520.23