


6WC 3450 RPM

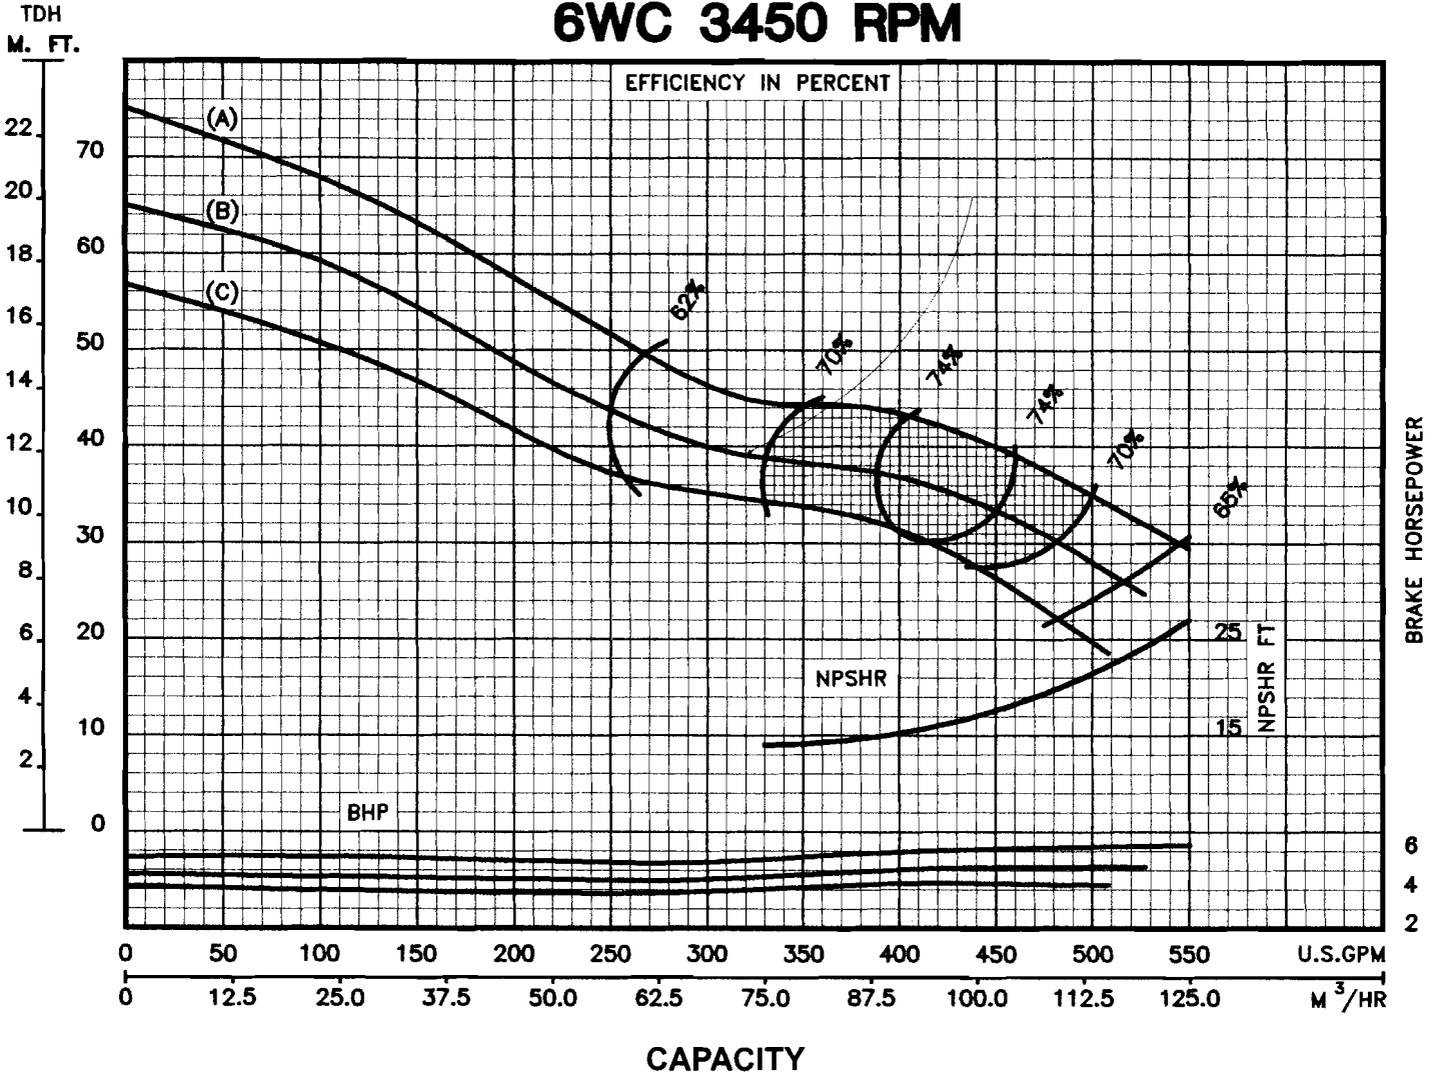

CAPACITY

IMPELLER DATA				THREADED BOWL DATA			
Impeller Number:	6808	TRIM: (A) 4.688" X 35"		Bowl Number	6828 D.I.		
Material:	BRONZE	(B) 4.500" X 35"		Bowl Dia.	5.563"		
Type:	CLOSED	(C) 4.313" X 35"		Max. No. Stages	21		
Thrust Factor:	K=4.13	Minimum submergence above eye of bottom impeller: 20 in.		One Stage Weight	75	lb	
Eye Area:	6.88 sq. in.			Add'l Stage Weight	15	lb	
Weight:	2.65 lb.			Std. Shaft Dia.	1.000	in	
EFFICIENCY CORRECTION				Std. Lateral	0.375	in	
Number of Bowls	1	2	3	4	Discharge Size	4	in
Change as follows	-4	-2	-1	0	Suction Size	4	in
Change in efficiency may affect both head and horsepower.				Max. Sphere Size	0.500 in		
				Max. Operation P.S.I.	650 (special)		

Performance based on pumping clear, fresh water at a temperature not over 85° F., and free of gas, air or abrasives, and with bowls properly adjusted and submerged.