PER STAGE	IMP. DIAM. EXIT	IMPELLER PART NO. 1517 IMPELLER PATTERN NO 1247	THRUST CONSTANT 11.5 WR² .834 LB. FT²/STAGE	PUMP SHAFT DIAM. $1\frac{11}{16}$" INCHES

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 14"

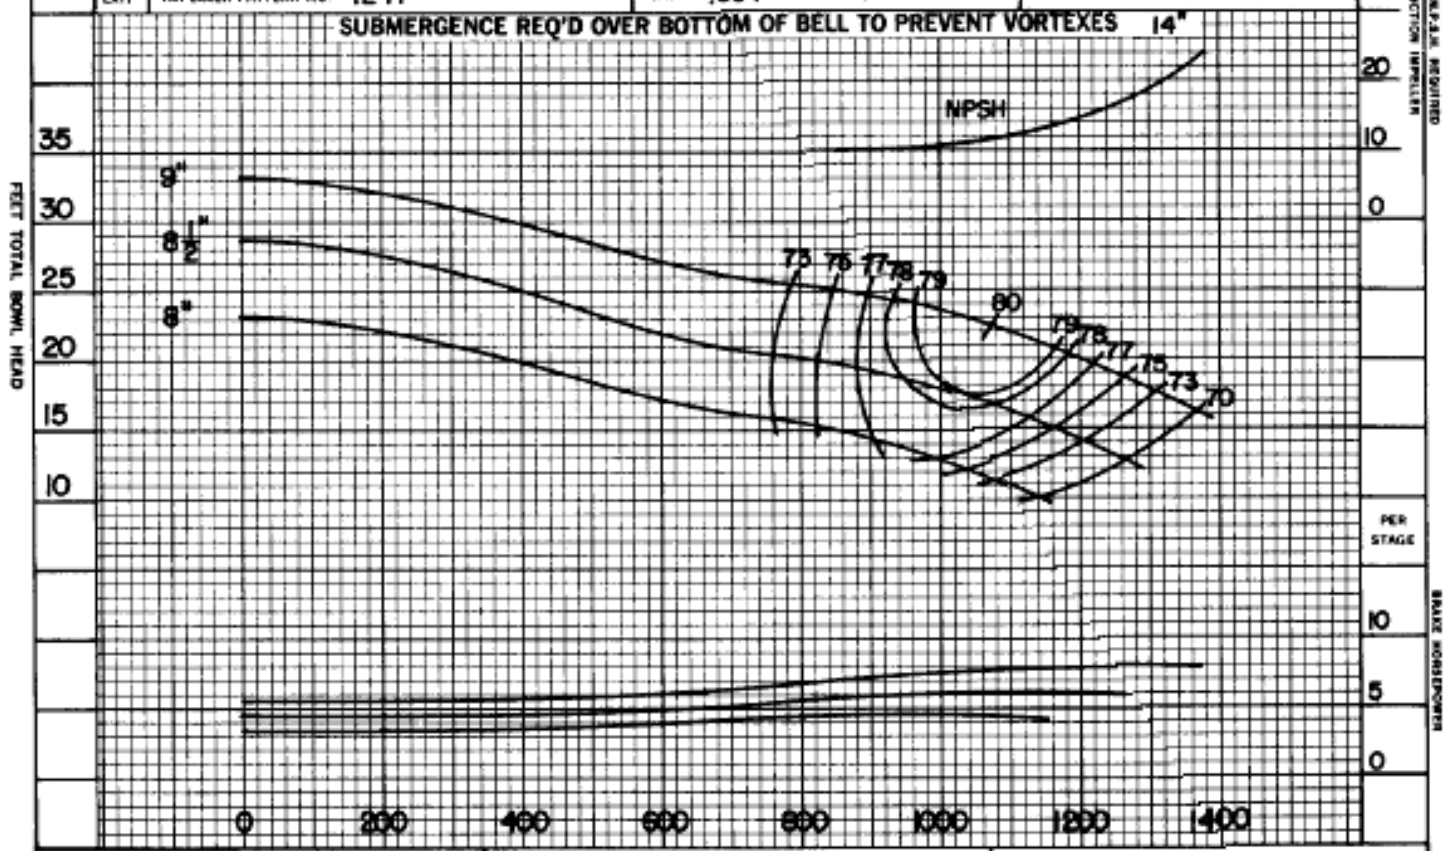

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP. GR. 1.0
FOR 1 STAGE MULTIPLY HEAD & EFF. BY .95
FOR 2 STAGES MULTIPLY HD. & EFF. BY .98
DATE 2-13-78

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1909

12 EC TURBINE PUMP 1170 RPM
IMPELLER – BRONZE
BOWL – CAST IRON VIT. ENAMELED
CURVE SHEET NO. EC-2535

JP-341A