PER STAGE	IMP. DIAM. EXIT	IMPELLER PART NO. / IMPELLER PATTERN NO.	THRUST CONSTANT 29 / WR^2 1.2 LB. FT^2/STAGE	PUMP SHAFT DIAM. 1-1/4 INCHES

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 27"

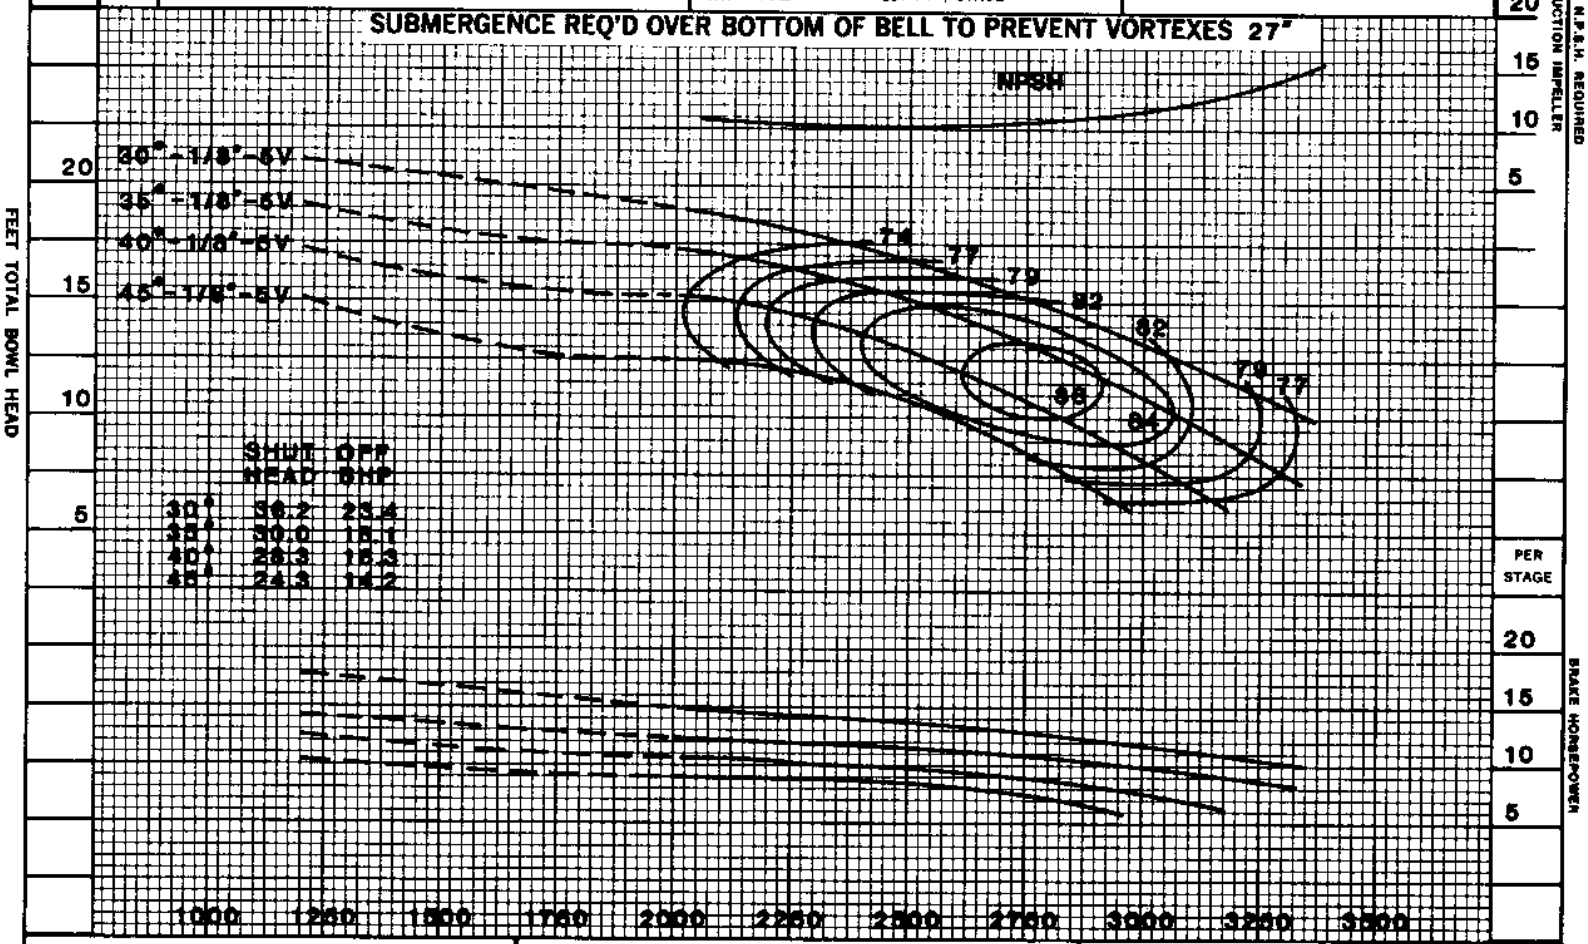

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP. GR. 1.0
FOR 1 STAGE MULTIPLY HEAD & EFF. BY 1.00
FOR 2 STAGES MULTIPLY HD. & EFF. BY 1.00
DATE 11-18-86

U.S. GALLONS PER MINUTE

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1909

12 YMS
IMPELLER – BRONZE
MIXED-FLOW PUMP
CLASS 'C' FINISH

1180 RPM
BOWL – CAST IRON
CURVE SHEET NO. EC-2809

JP 1124