PER STAGE	IMP. DIA.	IMP. EXIT	IMPELLER PART NO. 21989	THRUST CONSTANT 16	PUMP SHAFT DIAM. $1\frac{11}{16}$
			IMPELLER PATTERN NO. 21523	WR^2 2·42 Lb. FT^2/STAGE	

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 14"

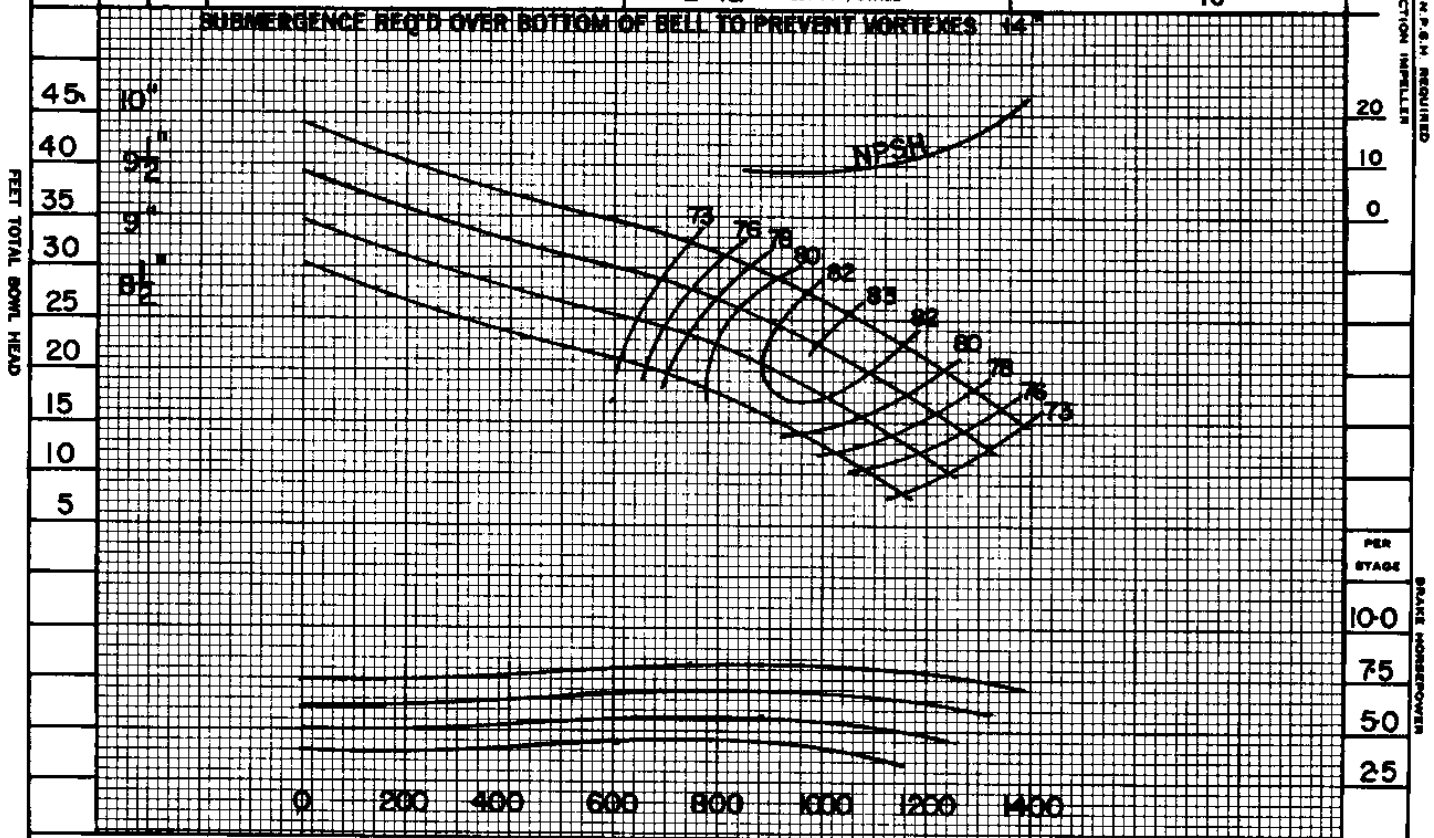

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP. GR 1.0
FOR 1 STAGE MULTIPLY HEAD & EFF. BY 0·95
FOR 2 STAGES MULTIPLY HD & EFF BY 0·98

DATE 11-18-86

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1908

13CLC TURBINE PUMP
IMPELLER — BRONZE

1170 R.P.M.
BOWL — CAST IRON
VIT. EN
CURVE SHEET NO.
EC-0605

JP-1017