PER STAGE	IMP. DIAM. EXIT	IMPELLER PART NO. 5032 IMPELLER PATTERN NO. 5031	THRUST CONSTANT 11 WR² 2.54 LB. FT²/STAGE	PUMP SHAFT DIAM. $1\frac{15}{16}$" INCHES

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 13"

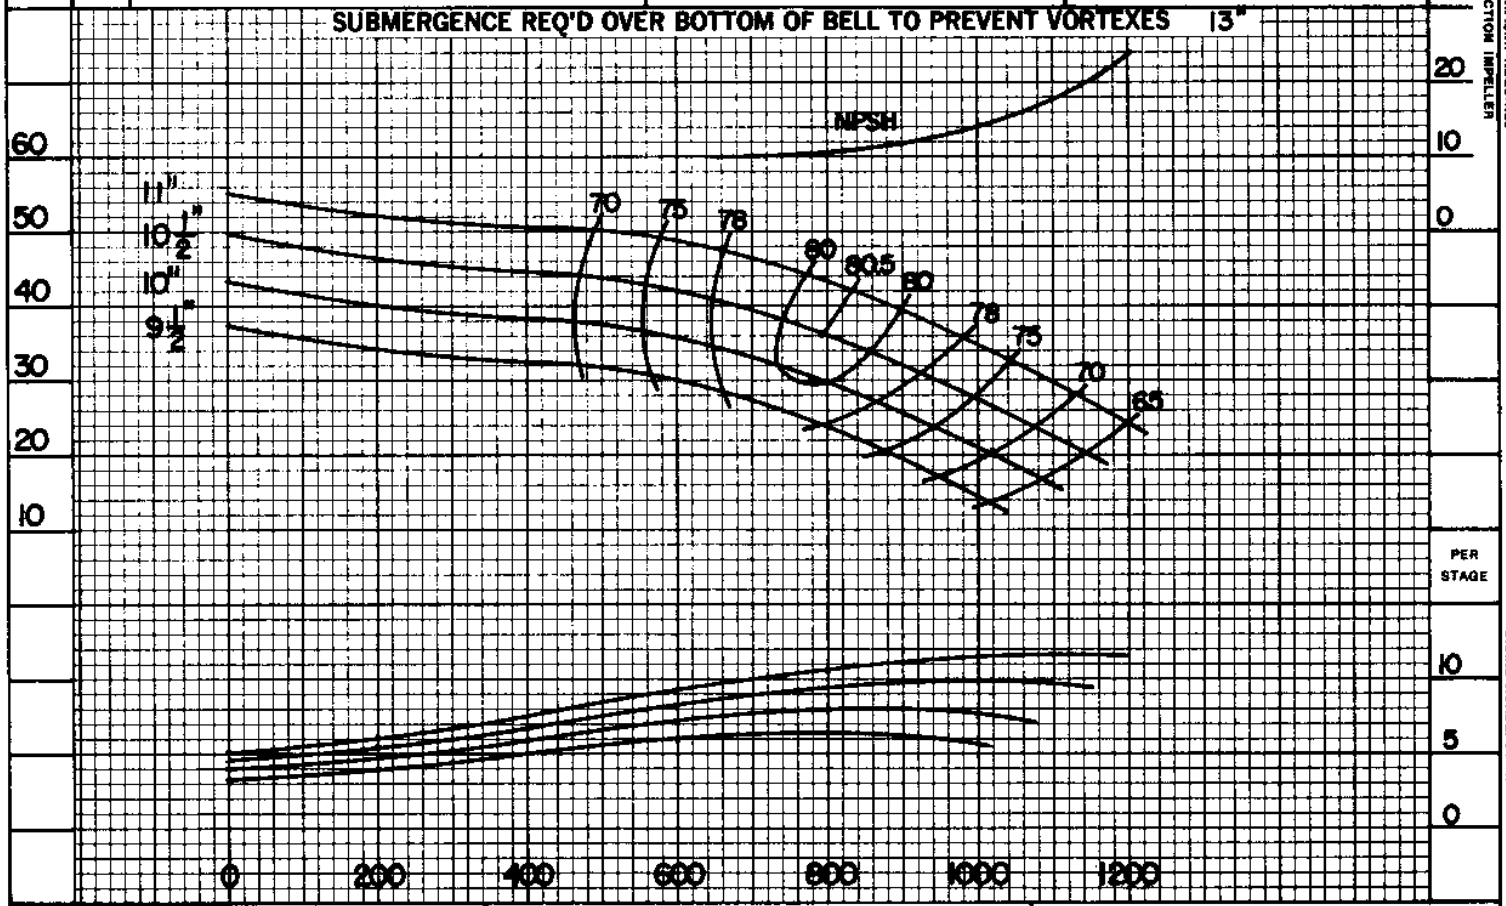

U.S. GALLONS PER MINUTE

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP. GR. 1.0
FOR 1 STAGE MULTIPLY HEAD & EFF. BY .95
FOR 2 STAGES MULTIPLY HD. & EFF. BY .98
DATE 11-18-86

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1909

14 BC TURBINE PUMP 1175 RPM
IMPELLER — BRONZE
BOWL — CAST IRON VIT. ENAMELED
CURVE SHEET NO. EC-2536

JP-341A