PER STAGE	IMP. DIA.	IMP. EXIT	IMPELLER PART NO. 2958 IMPELLER PATTERN NO. 2927	THRUST CONSTANT 17 WR^2 2-12 LB. FT^2/STAGE	PUMP SHAFT DIAM. $1\frac{15}{16}$

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 18"

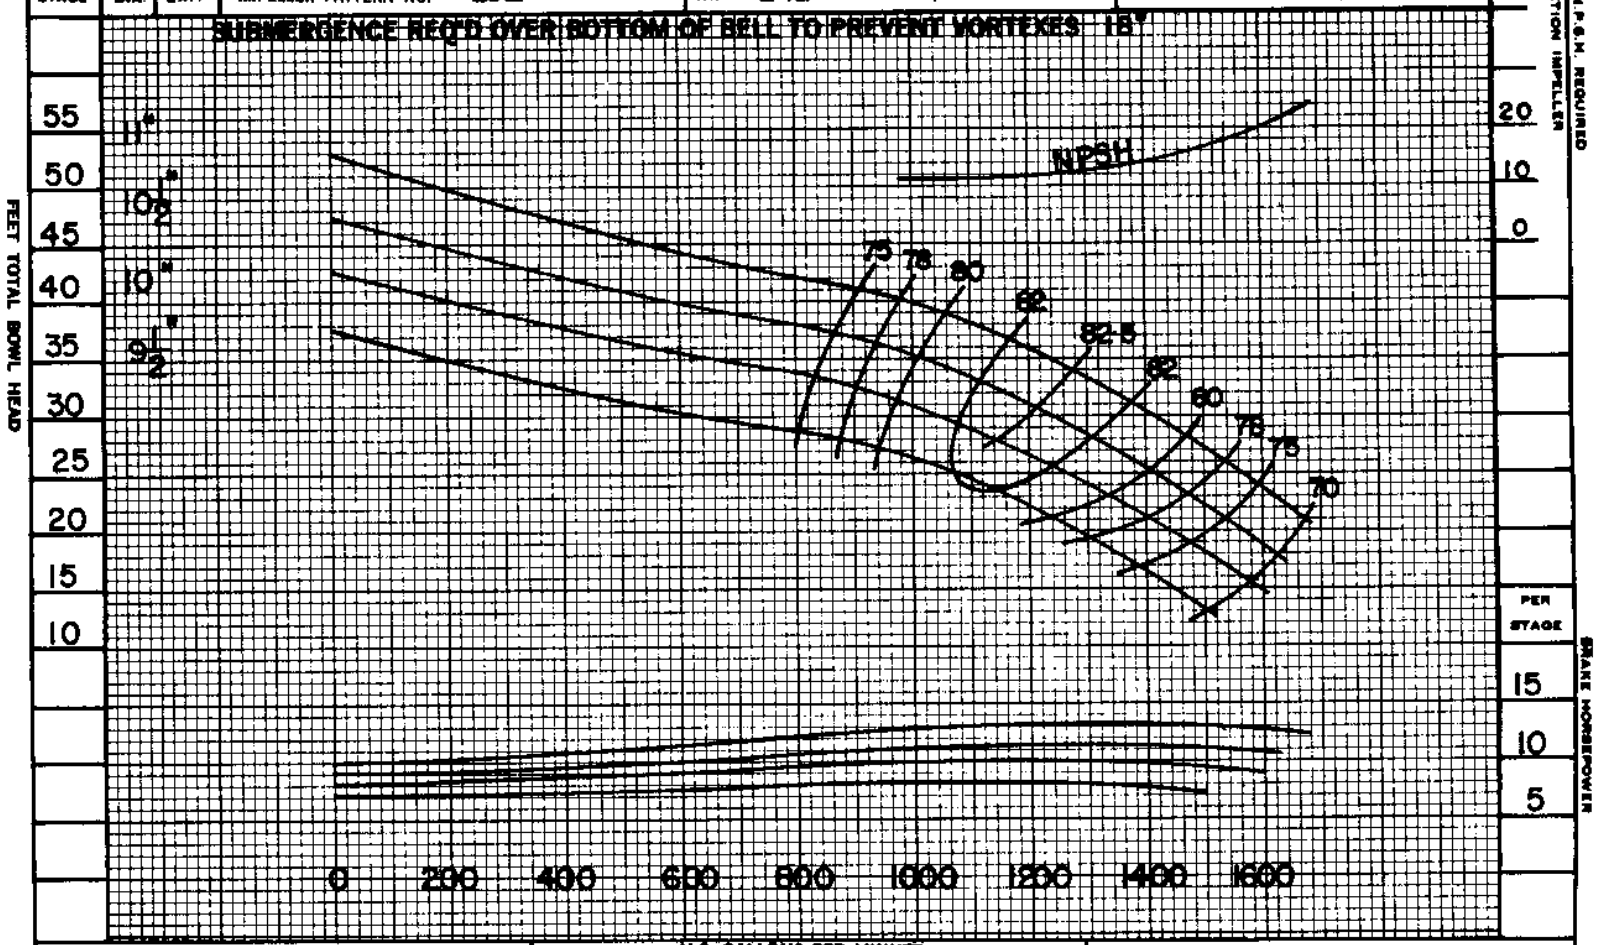

PERFORMANCE BASED ON MULTISTAGE TESTS PUMPING CLEAR COLD WATER SP. GR. 1.0

FOR 1 STAGE MULTIPLY HEAD & EFF. BY 0.95

FOR 2 STAGES MULTIPLY HD. & EFF. BY 0.98

DATE 11-18-86

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1909

14CC TURBINE PUMP
IMPELLER — BRONZE

1175 RPM
BOWL — CAST IRON
VIT. EN
CURVE SHEET NO
EC-0608

JP-1017