PER STAGE	IMP DIA	IMP EXIT	IMPELLER PART NO. 2868	THRUST CONSTANT 66·0	PUMP SHAFT DIAM $1\frac{11}{16}$
			IMPELLER PATTERN NO. 4717	WR^2 3·4 LB. FT²/STAGE	

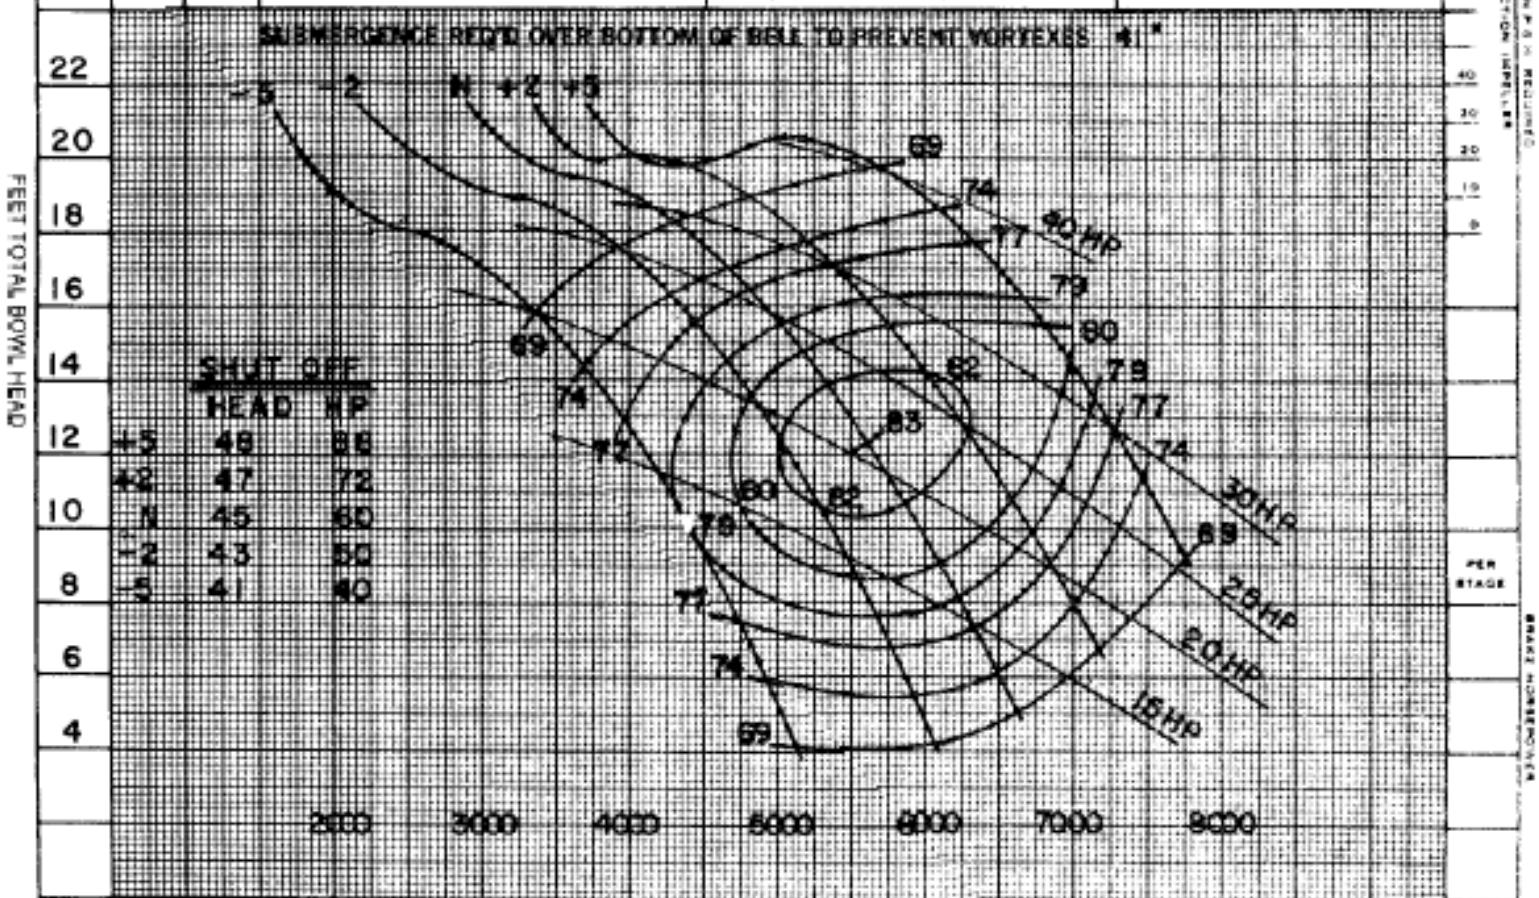

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP GR 1.0
FOR 1 STAGE MULTIPLY HEAD & EFF BY 1·0
FOR 2 STAGES MULTIPLY HD & EFF BY 1·0
DATE 11-18-86

U.S. GALLONS PER MINUTE

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1906

14 PO PROPELLER PUMP 1170 R.P.M.
IMPELLER BRONZE BOWL - CAST IRON

CURVE SHEET NO
EC-0857

PER STAGE	IMP DIA	IMP. EXIT	IMPELLER PART NO. 2868	THRUST CONSTANT 66·0	PUMP SHAFT DIAM. $1\frac{11}{16}$
			IMPELLER PATTERN NO. 4717	WR^2 3·4 LB. FT²/STAGE	

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 38"

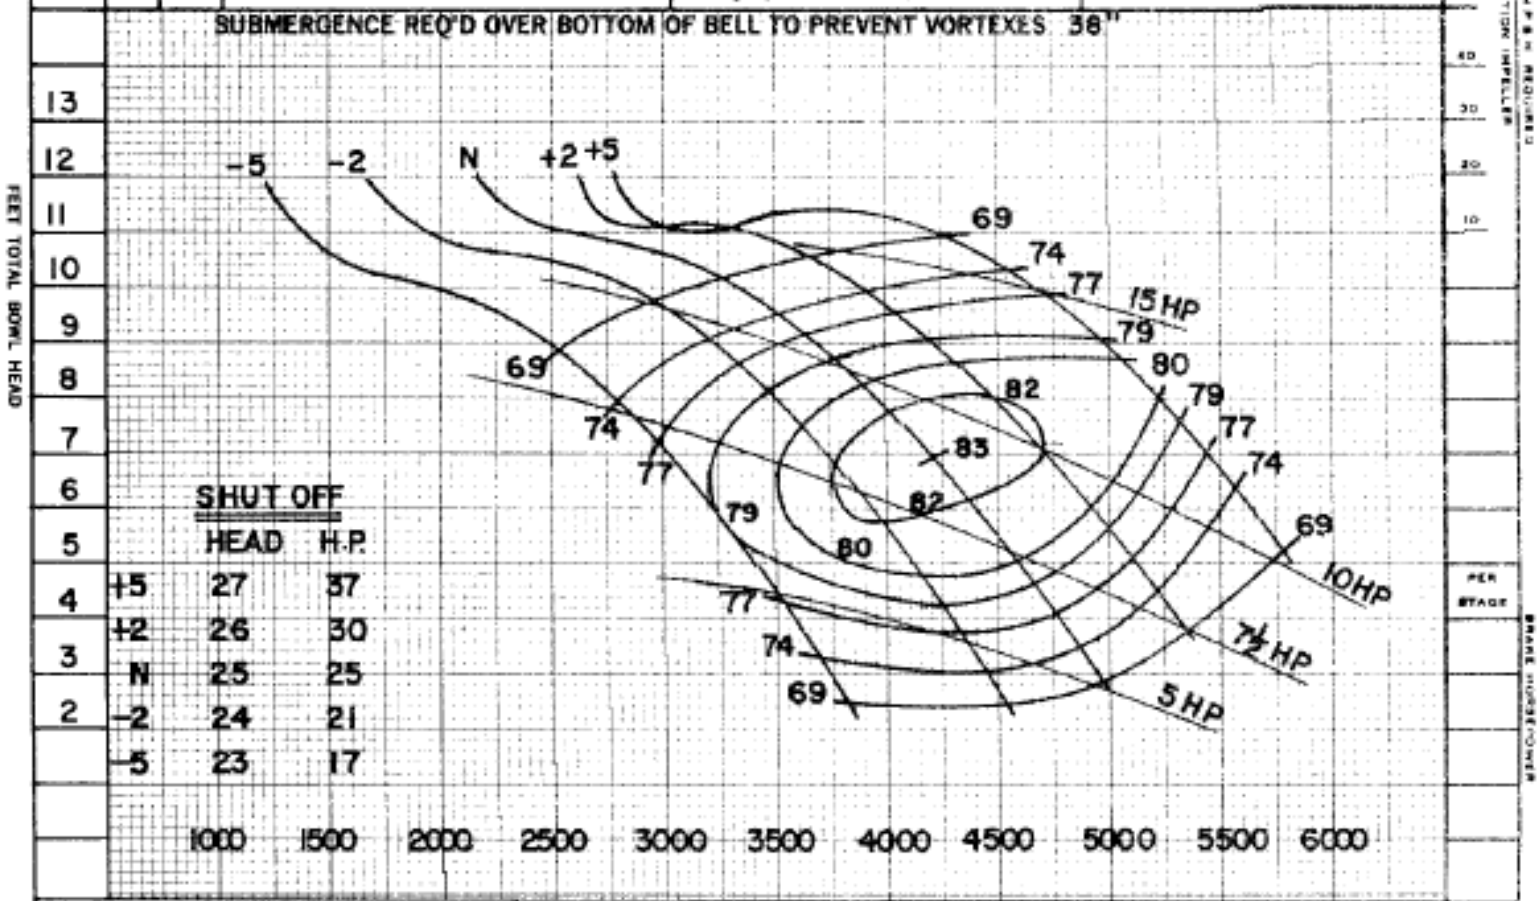

SHUT OFF

	HEAD	H.P.
+5	27	37
+2	26	30
N	25	25
-2	24	21
-5	23	17

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP. GR. 1.0
FOR 1 STAGE MULTIPLY HEAD & EFF. BY 1·0
FOR 2 STAGES MULTIPLY HD. & EFF. BY 1·0

DATE 9-25-73

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1909

14 PO PROPELLER PUMP 875 R.P.M.
IMPELLER — BRONZE BOWL — CAST IRON

CURVE SHEET NO. EC-0858

JP 3817