PER STAGE	IMP. DIA.	IMP. EXIT	IMPELLER PART NO. 4435 IMPELLER PATTERN NO. 4434	THRUST CONSTANT 28 WR² 10 LB. FT²/STAGE	PUMP SHAFT DIAM. $2\frac{3}{16}$

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 36"

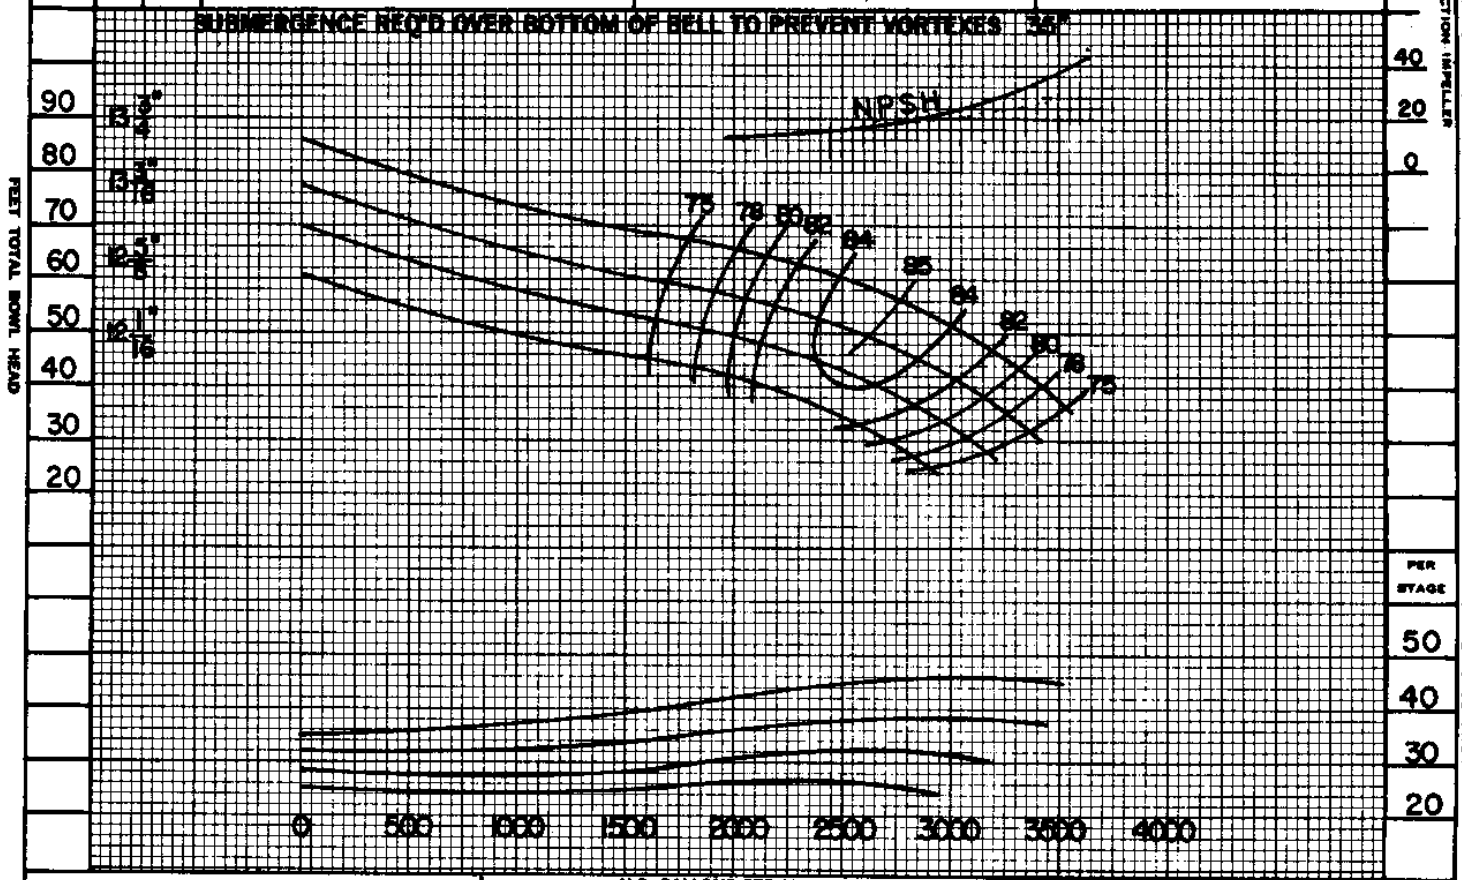

PERFORMANCE BASED ON MULTISTAGE TESTS PUMPING CLEAR COLD WATER SP GR. 1.0

FOR 1 STAGE MULTIPLY HEAD & EFF. BY .97

FOR 2 STAGES MULTIPLY HD & EFF BY .99

DATE 11-18-86

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1909

18CC TURBINE PUMP
IMPELLER — BRONZE

1175 R.P.M.
BOWL — CAST IRON
VIT. EN.
CURVE SHEET NO
EC-0621

JP-1017