PER STAGE	IMP. DIA.	IMP. EXIT	IMPELLER PART NO. 6455	THRUST CONSTANT 9.0	PUMP SHAFT DIAM. $1\frac{1}{2}$
			IMPELLER PATTERN NO. 6454	WR^2 0·456 LB. FT^2/STAGE	

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 16"

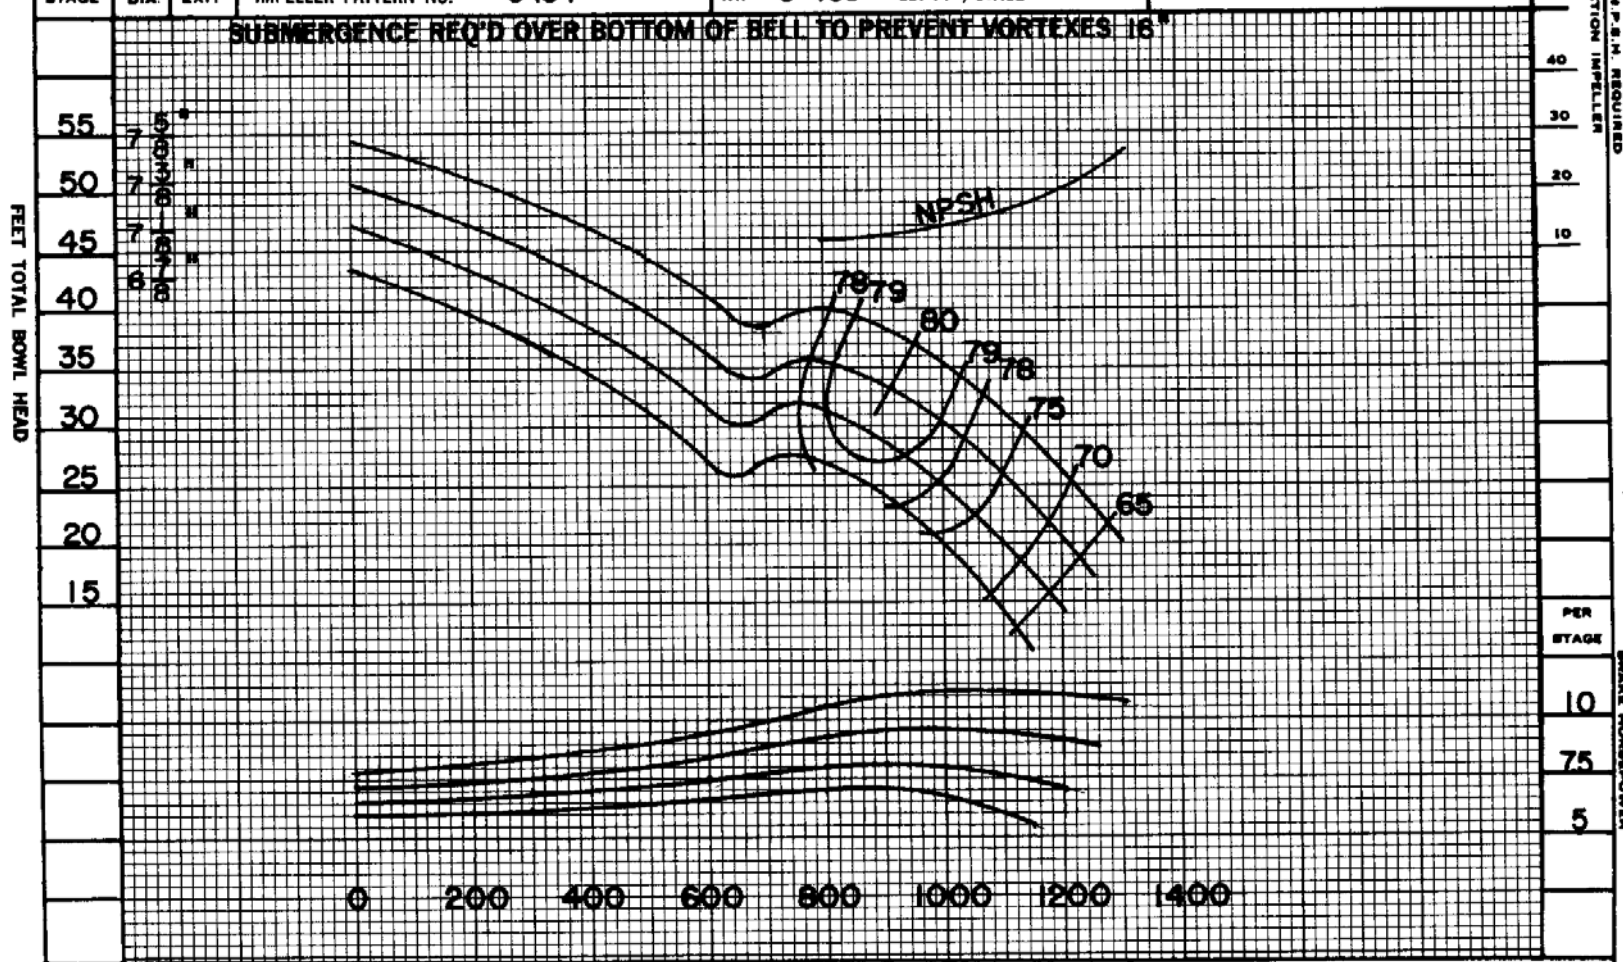

U.S. GALLONS PER MINUTE

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP. GR. 1.0
FOR 1 STAGE MULTIPLY HEAD & EFF. BY .95
FOR 2 STAGES MULTIPLY HD. & EFF. BY .98
DATE 10-26-72

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1909

10 ECII YURBINE PUMP
IMPELLER — BRONZE
1760 R.P.M.
BOWL — CAST IRON
VIT. EN.
CURVE SHEET NO. EC-0542

Section 4B

March 10, 1975

JP-1017