PER STAGE	IMP. DIAM. EXIT	IMPELLER PART NO. 12539 IMPELLER PATTERN NO. 12538	THRUST CONSTANT 11.2 WR^2 .293 LB. FT²/STAGE	PUMP SHAFT DIAM. $1\frac{1}{2}$" INCHES

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 16"

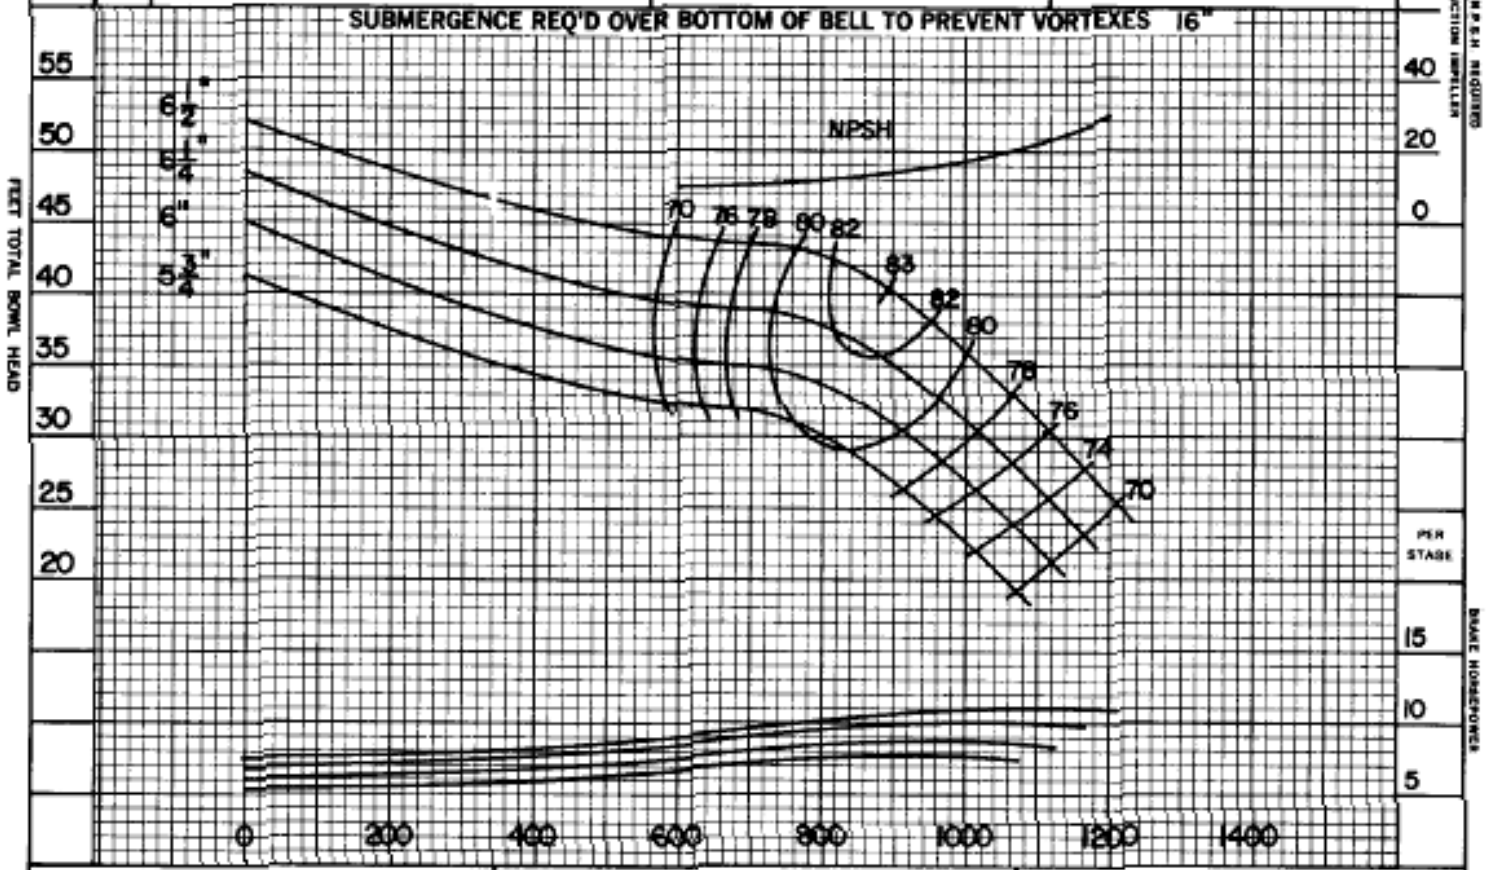

PERFORMANCE BASED ON MULTISTAGE TESTS PUMPING CLEAR COLD WATER SP. GR. 1.0

FOR 1 STAGE MULTIPLY HEAD & EFF. BY .95

FOR 2 STAGES MULTIPLY HD. & EFF. BY .98

DATE 2-7-78

U.S. GALLONS PER MINUTE

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1908

10 ES TURBINE PUMP 1760 RPM

IMPELLER – BRONZE

BOWL – CAST IRON VIT. ENAMELED

CURVE SHEET NO. EC-2516

JP-341A