PER STAGE	IMP. DIAM. EXIT	IMPELLER PART NO. 1235 IMPELLER PATTERN NO. 1107	THRUST CONSTANT 11.2 WR² .914 LB. FT²/STAGE	PUMP SHAFT DIAM. $1\frac{11}{16}$" INCHES

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 14"

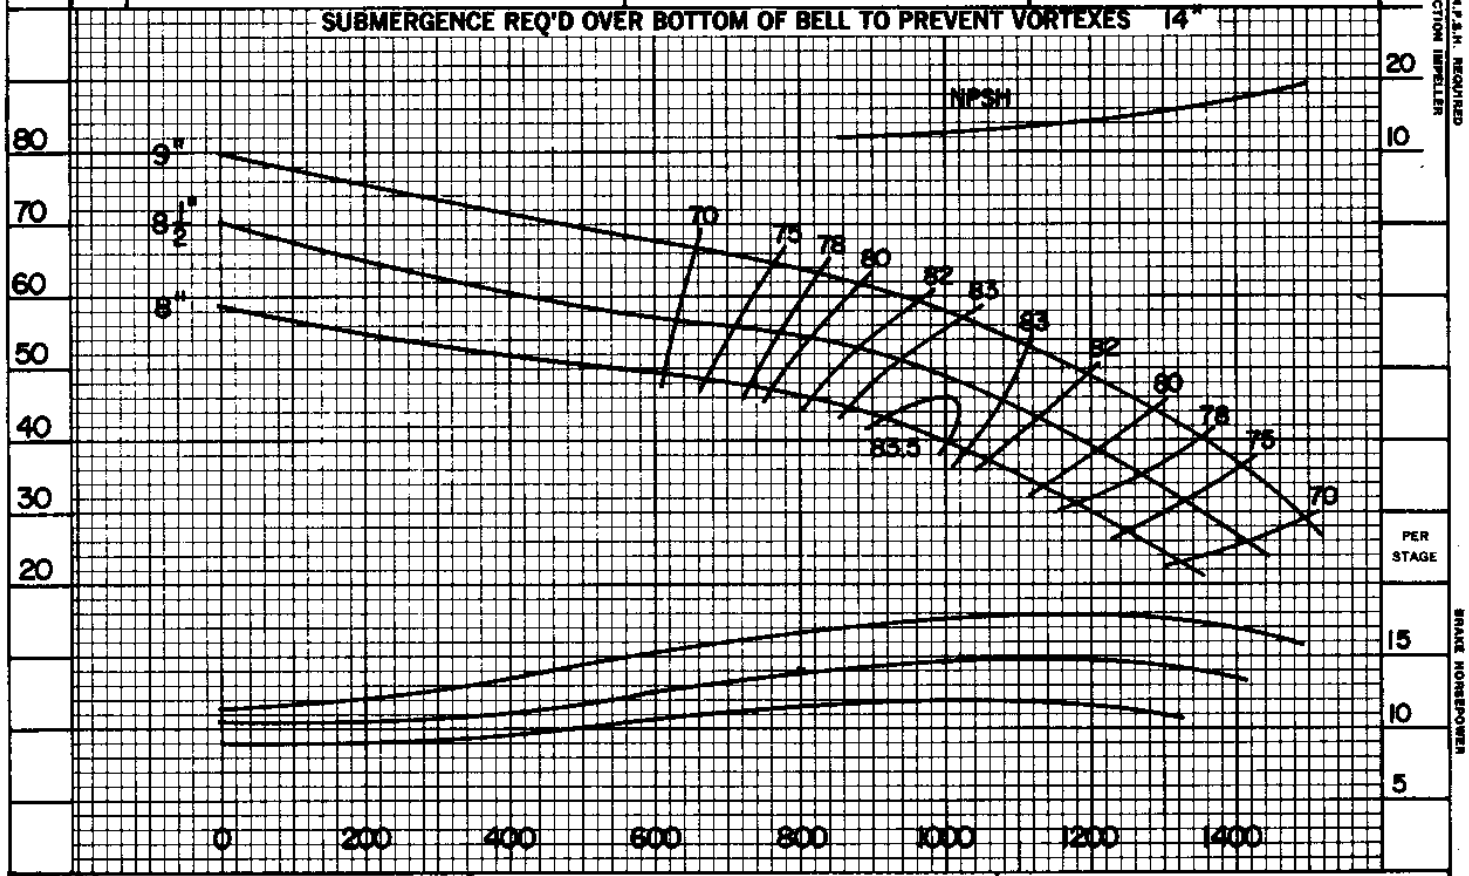

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP. GR. 1.0

FOR 1 STAGE MULTIPLY HEAD & EFF. BY .98

FOR 2 STAGES MULTIPLY HD. & EFF. BY .99

DATE 11-18-86

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1909

12 CC TURBINE PUMP 1770 RPM

IMPELLER – BRONZE

BOWL – CAST IRON VIT. ENAMELED

CURVE SHEET NO. EC-2518

JP-341A