PER STAGE	IMP. DIAM. EXIT	IMPELLER PART NO. 21988 IMPELLER PATTERN NO. 21522	THRUST CONSTANT 15 WR² 2.28 LB. FT²/STAGE	PUMP SHAFT DIAM. $1\frac{11}{16}$" INCHES

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 22"

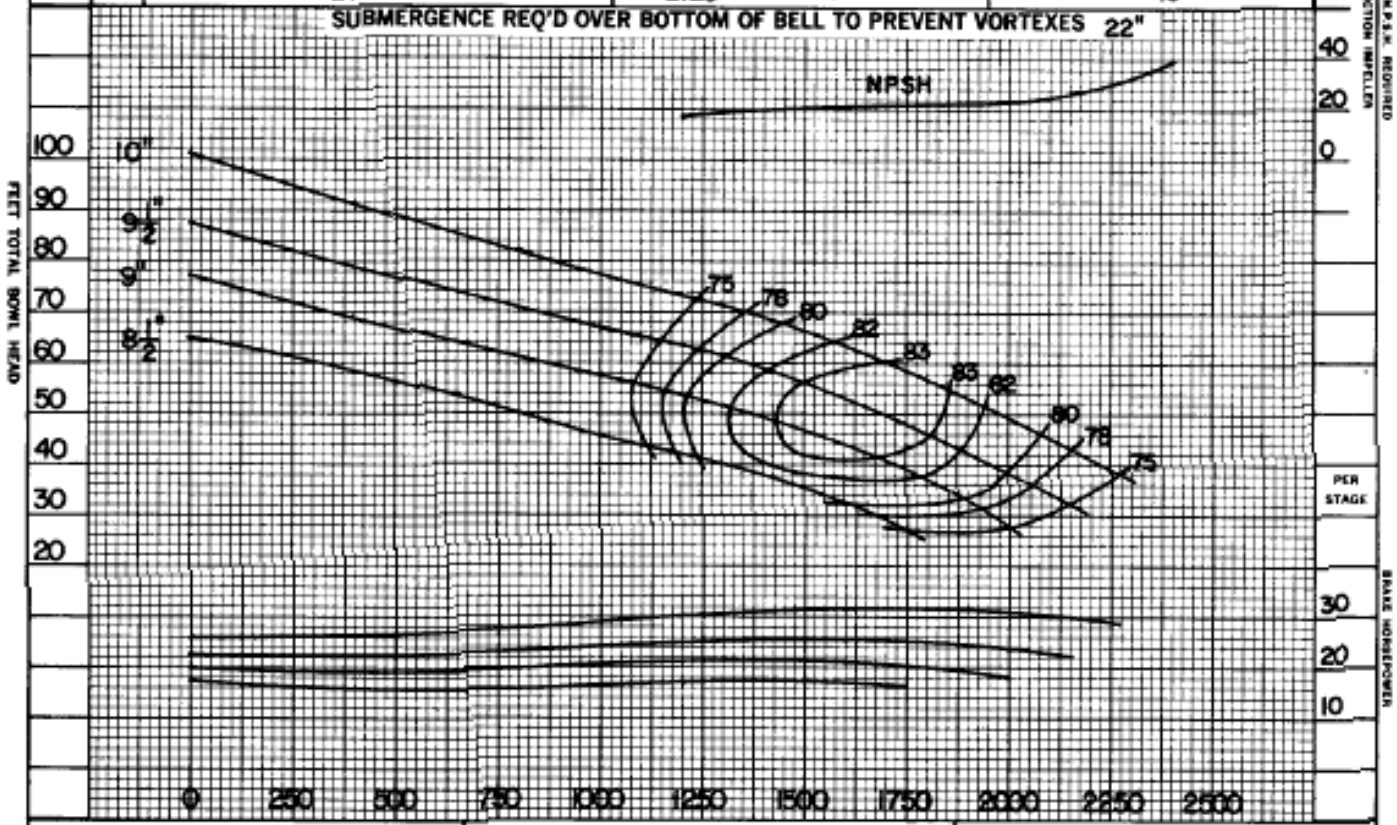

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP. GR. 1.0

FOR 1 STAGE MULTIPLY EFF. BY .95

FOR 2 STAGES MULTIPLY EFF. BY .98

DATE 7-20-78

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1900

13 CMC TURBINE PUMP 1770 RPM

IMPELLER — BRONZE
BOWL — CAST IRON VIT. ENAMELED

CURVE SHEET NO. EC-2714

JP 1134