PER STAGE	IMP. DIAM. EXIT	IMPELLER PART NO. / IMPELLER PATTERN NO.	THRUST CONSTANT 19 / WR² 2.1 LB. FT²/STAGE	PUMP SHAFT DIAM. 1 15/16" INCHES

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 32"

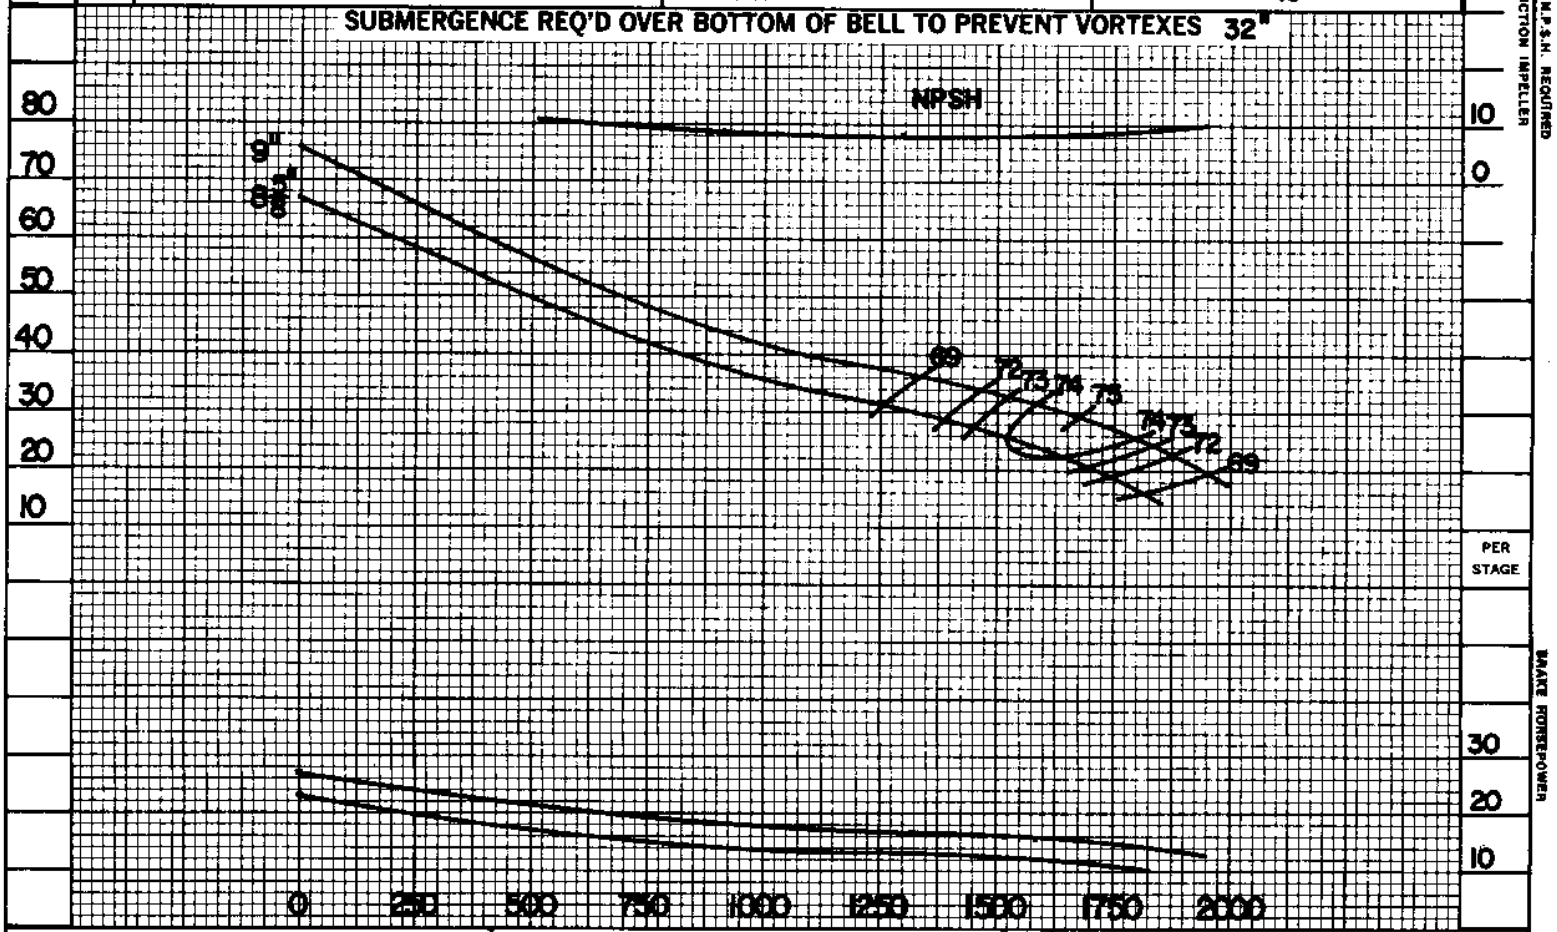

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP. GR. 1.0
FOR 1 STAGE MULTIPLY HEAD & EFF. BY 1.00
FOR 2 STAGES MULTIPLY HD. & EFF. BY 1.00
DATE 11-18-86

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1909

13 QLC TURBINE PUMP 1780 RPM
IMPELLER —— BOWL – CAST IRON
STAINLESS STL. COATED
CURVE SHEET NO. EC-2267

JP 1124