| PER STAGE | IMP. DIAM. EXIT | IMPELLER PART NO. 2958<br>IMPELLER PATTERN NO. 2927 | THRUST CONSTANT 17<br>WR² 2.12 LB. FT²/STAGE | PUMP SHAFT DIAM. $1\frac{15}{16}$" INCHES |
|---|---|---|---|---|

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 26"

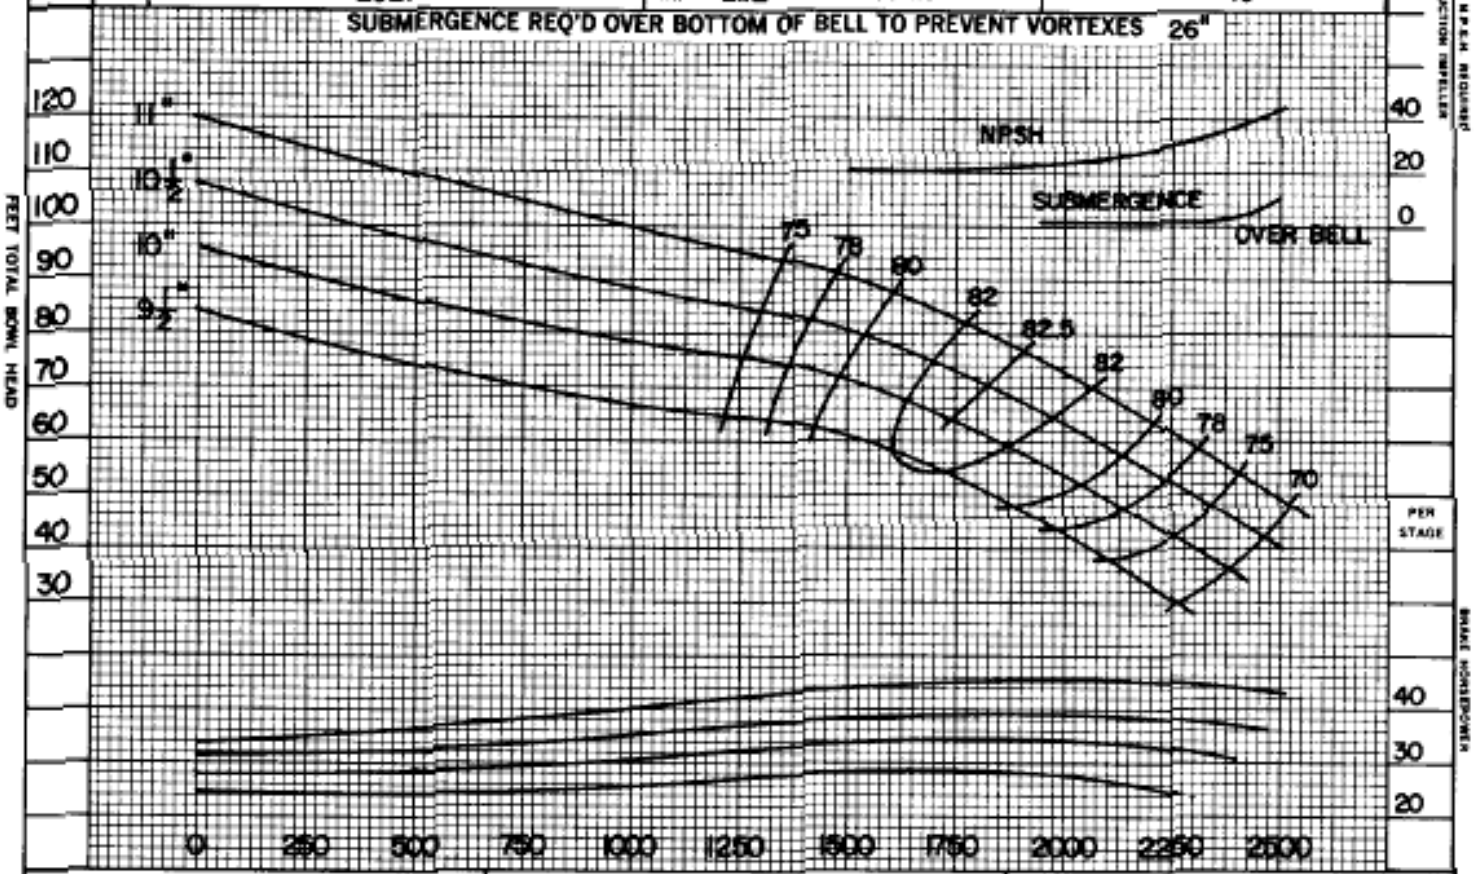


PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP. GR. 1.0
FOR 1 STAGE MULTIPLY HEAD & EFF. BY 1.0
FOR 2 STAGES MULTIPLY HD. & EFF. BY .95 .98

DATE 2-8-78

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1909

14 CC TURBINE PUMP 1770 R.P.M.
IMPELLER – BRONZE
BOWL – CAST IRON VIT. ENAMELED

CURVE SHEET NO. EC-2522

JP 1124