| PER STAGE | IMP. DIAM. EXIT | IMPELLER PART NO. 33258 | THRUST CONSTANT 14 | PUMP SHAFT DIAM. $1\frac{15}{16}$" INCHES |
|---|---|---|---|---|
| | | IMPELLER PATTERN NO. 1574-2 | WR² 2.5 LB. FT²/STAGE | |

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 28"

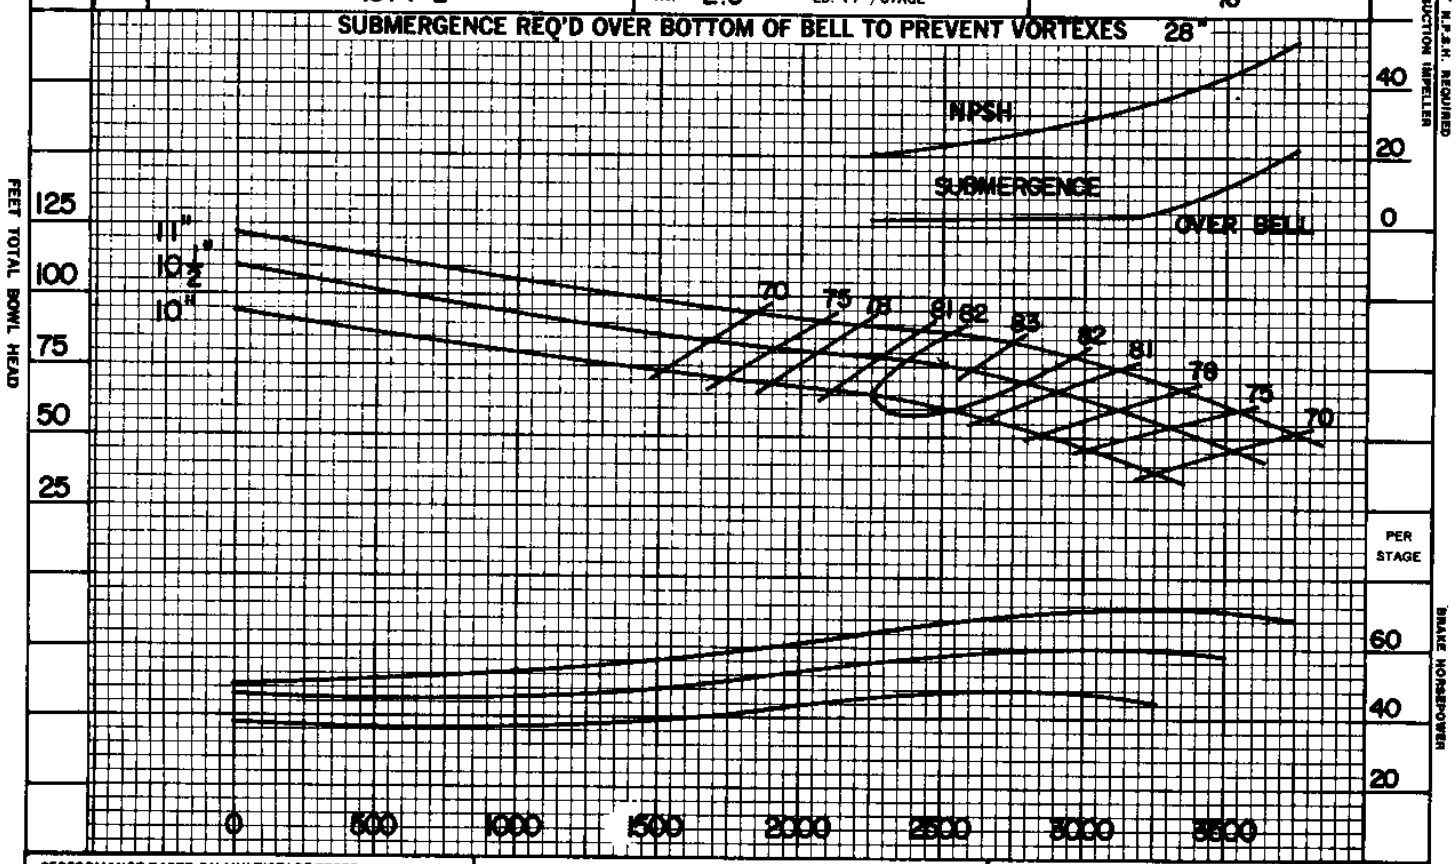


U.S. GALLONS PER MINUTE

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP. GR. 1.0

FOR 1 STAGE MULTIPLY HEAD & EFF. BY .95

FOR 2 STAGES MULTIPLY HD. & EFF. BY .98

DATE 11-18-86

**Johnston Pump Company**
Glendora, California 91740
ESTABLISHED 1909

14 EC TURBINE PUMP 1770 RPM
IMPELLER — BRONZE
BOWL — CAST IRON VIT. ENAMELED

CURVE SHEET NO. EC-2525

JP-341A