PER STAGE	IMP. DIAM. EXIT	IMPELLER PART NO. / IMPELLER PATTERN NO.	THRUST CONSTANT 21.2 / WR² 15 LB. FT²/STAGE	PUMP SHAFT DIAM. 2 7/16" INCHES

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 38"

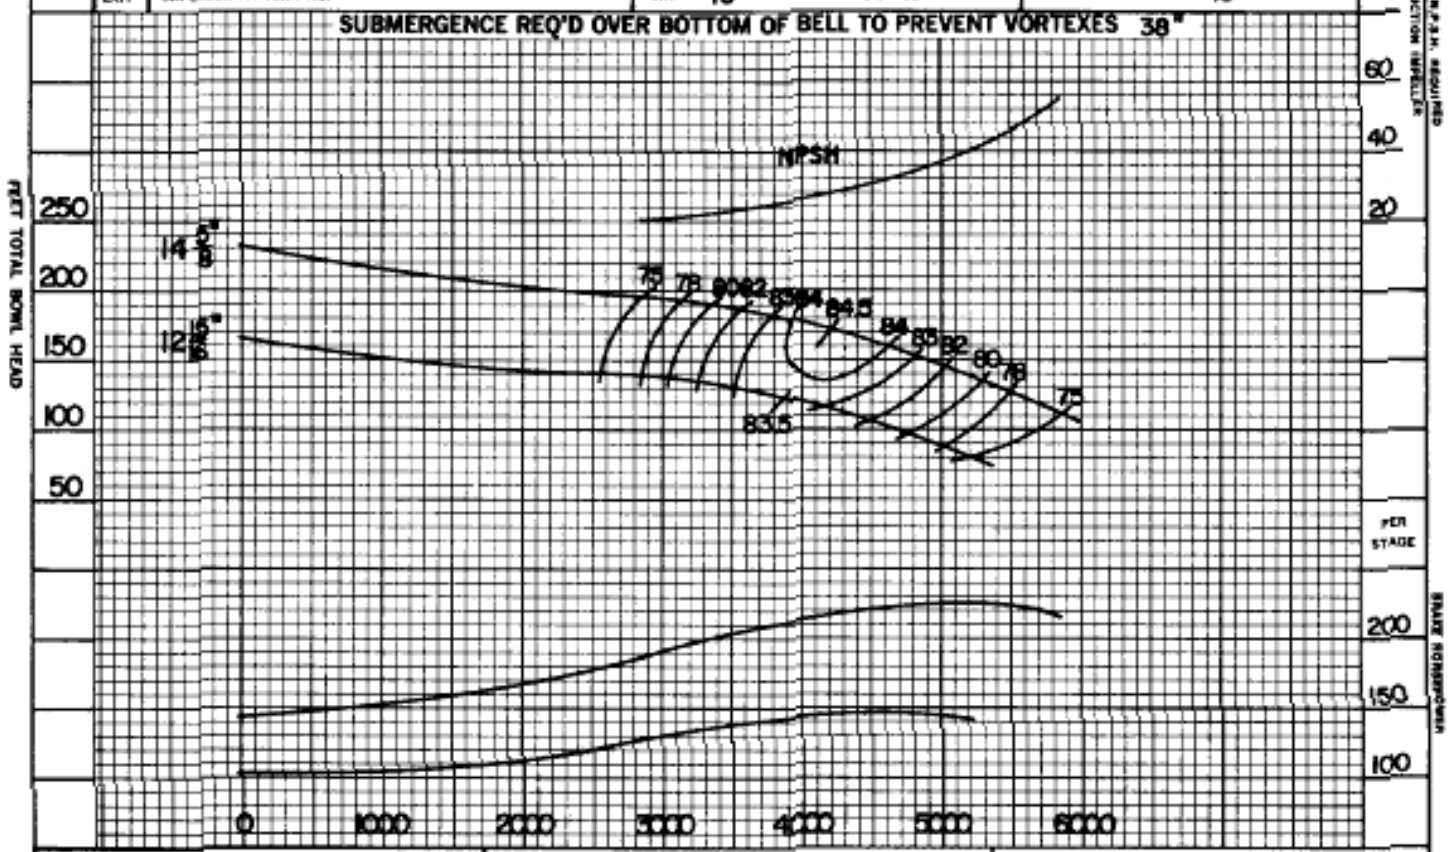

PERFORMANCE BASED ON MULTISTAGE TESTS PUMPING CLEAR COLD WATER SP. GR. 1.0

FOR 1 STAGE MULTIPLY HEAD & EFF. BY

FOR ☐ STAGES MULTIPLY HD. & EFF. BY

DATE 10-15-77

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1909

20 GMC TURBINE PUMP 1770 RPM

IMPELLER – BRONZE

BOWL – CAST IRON COATED

CURVE SHEET NO. EC-2397

JP-343A