PER STAGE	IMP. DIAM. EXIT	IMPELLER PART NO. 17798 IMPELLER PATTERN NO. 2925	THRUST CONSTANT 2.4 WR² .046 LB. FT²/STAGE	PUMP SHAFT DIAM. 3/4" INCHES

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 5"

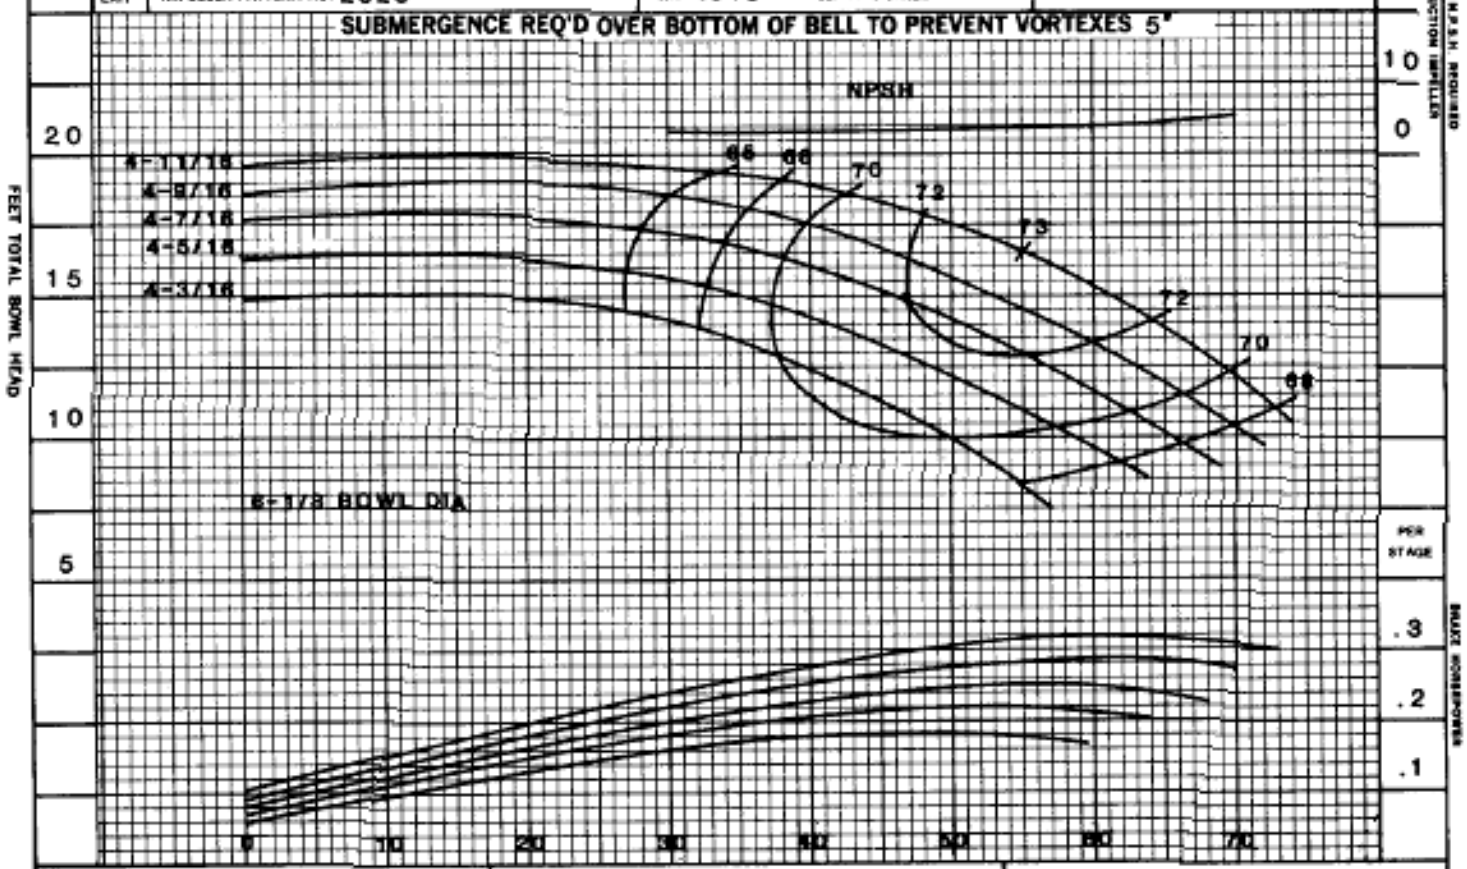

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP. GR. 1.0
FOR 1 STAGE MULTIPLY HEAD & EFF. BY .95
FOR 5 STAGES MULTIPLY HD. & EFF. BY .99
DATE 11-18-86

U.S. GALLONS PER MINUTE

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1909

6 AC TURBINE PUMP 1760 RPM
IMPELLER – BRONZE
BOWL – CAST IRON VIT. ENAMELED
CURVE SHEET NO. EC-2500

JP-341A